

The DAIKIN logo is located in the top left corner. It consists of a stylized white triangle pointing to the right, followed by the word "DAIKIN" in a bold, white, sans-serif font.

VRVXDHK2017-2

The VRV DHD logo is centered in the middle of the page. The letters "VRV" are in a bold, white, sans-serif font with a horizontal line pattern. The "DHD" is in a stylized, white, sans-serif font with a spiral pattern.

Heat Pump 50Hz

R-410A

Next Generation

VRV X7

System



VRV X7

First launched in Japan in 1982, the Daikin **VRV** system has been embraced by world markets for over 30 years. Now, Daikin proudly introduces the next-generation **VRV X7** system. It now offers improved energy savings, comfort, and ease of installation to meet an ever wider variety of needs.

INDEX

Advanced
Technologies Achieve

P01

VRV Indoor Units

P13

VRV Outdoor Units

P33

Control Systems

P35

Air Purifying Products

P46

Summary

P51

Advanced Technologies Achieve

New V-Type Inverter DC Scroll Type Compressor

New

A compressor is the core component of an air-conditioning system that determines the overall performance. With our sound experience in developing compressors and expertise in VRV central air conditioning system, Daikin empowers every VRV unit with a stronger core.

The new V-Type DC Scroll Type Compressor specially developed for the VRV X7 series with cutting-edge technologies and unique materials offers you a unprecedented level of comfort.



Special-Made Spiral Design Compression Chamber

The spiral structure of compression chamber gradually increases the pressure within the chamber as the gas moves inward. High strength material gives 2.4 times tensile strength compare to conventional materials so that it can increase compression chamber volume by using thin spiral design. As a result of having thinned wall-thickness of the scroll, compression chamber volume increase 50%.



V-Type DC Scroll Type Compressor



- Unlike high pressure scroll compressor, the compressor features high-medium pressure separators to prevent ineffective heat loss and boost efficiency.
- The back pressure control technology ensures tightly locked disks under low capacity condition, enhancing the compression efficiency.
- Refrigerant enters the chamber directly without ineffective preheating for higher compression efficiency.


Daikin employs advanced processing technique and high-quality parts to ensure efficient operation of the compressor.

Excellent Performances

Gircle* Highly Integrated Heat Exchanger New


The new Gircle integrated four-way heat exchanger with various fin designs maximizes the surface area of the heat exchanger and enhances the heat exchange rate. It does not only stabilise the operation of outdoor units, but also improves the energy-saving performance.

*Note: The abbreviation of Type G integrated round circulation heat exchanger.



Multi-Row Thin Refrigerant Pipes

Daikin overcame the challenge of multi-row refrigerant piping design by presenting rows of thinner refrigerant pipes (Ø7) to effectively increase the surface area for refrigerant-air heat exchange and optimize the heat exchange rate.

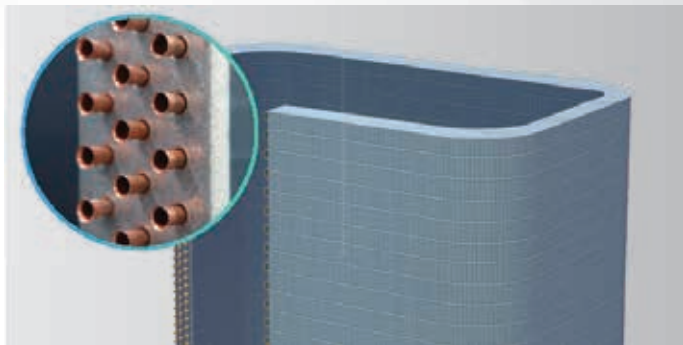

REFRIGERANT PIPE OF VRV X7 SERIES



Three rows of dia. 7mm copper pipes decreases the flow resistance of the refrigerant and increase heat exchange surface area for better heat exchange efficiency.


CONVENTIONAL REFRIGERANT PIPE



Two rows of dia. 8mm copper pipes with relatively higher flow resistance and smaller heat exchange surface area undermine the heat exchange efficiency.

Optimal Spiral Grooves inside the Copper Pipes

Driven by the relentless pursuit of excellence, Daikin strives to optimize the internal spiral groove design of copper pipes to fit different refrigerant piping structures. After thousands of simulations and tests, Daikin developed the ideal internal spiral groove design for VRV X7 Series that can minimize the turbulent flow of refrigerants while enhancing the heat exchange rate.

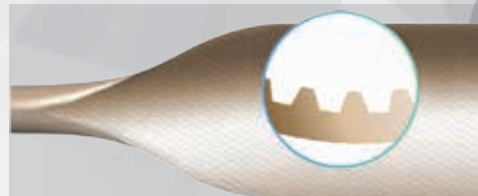


Profile of the internal spiral grooves

Bilayer coating for better fin protection, lasting and efficient heat exchange




- The hydrophilic layer protects the system against frost in winter
- The anti-corrosion layer protects the heat exchanger against the damage caused by air pollution

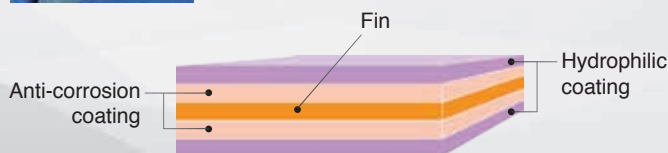

Structure of with double-layer coating heat exchanger fin

Development of High-Performing Fins



- The outdoor unit fins can prevent water and dust deposits, and avoid accumulation of molten frost to enhance the heat exchange performance.
- Dense fins are installed in the indoor units to improve the heat exchange performance.

Reliable And Stable System

Advanced Functions for Accurate Test Function and More Stable Operation

With various user-friendly test operation, the VRV X7 Series can automatically check the wiring, piping, refrigerant level and stop valve to speed up the installation process and effectively improve the quality of field settings.



Oil Return Control Technology Guarantees Reliable Operation

Incorporating the findings of Daikin's in-depth VRV system study, the VRV X7 Series monitors the operational data on a real-time basis and determines the best time to carry out oil return using the smart oil return technology.

Meanwhile, Daikin is able to achieve an oil recovery rate of up to 99.9% and stable and efficient operation with the smart cross oil return technology, complemented with smart compressor oil return control technology, outdoor unit oil return control technology, large-volume oil separator and smart oil balancing circuit.

*Daikin's test results

Reliable And Stable System

Cool MAX Refrigerant Cooling Technology

The low-temperature refrigerant can cool down the main PCB, minimizing the size of the outdoor unit and ensuring efficient and stable operation.



Large Airflow Rate Streamlined Scroll Fan New And Higher External Static Pressure of Outdoor Unit

Daikin has developed a unique fan design for the VRV central air conditioning system using the aeronautic fluid dynamics simulation technology, resulting in more even wind speed, higher airflow rate, less energy consumption and better heat ejection performance.



Upgraded VOS5.0 Control Logic New


By collecting and analyzing the huge volume of operational data of VRV systems across the world for over three decades, Daikin is able to make accurate judgement on the optimal comfort and energy saving levels.

The new VOS (VRV Operating System) 5.0 Control Logic not only controls the refrigerant flow, but also adjusts the condensation/evaporation temperature of refrigerant and the indoor air flow rate* based on the actual load, delivering outstanding energy-saving performance.



*Applicable to selected models only

HIG Smart PCB

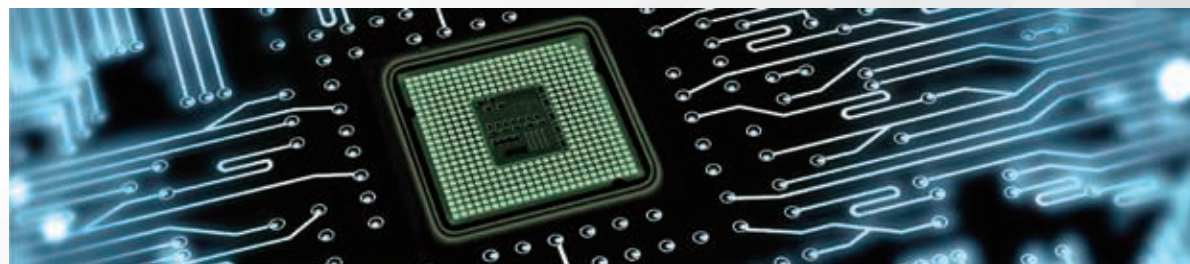

Compact and Versatile PCB

As the “brain” of an outdoor air-conditioning system, the PCB marries the wisdom and dreams of Daikin specialists. The VRV X7 Series features the latest HIG Smart PCB which is smaller and highly versatile thanks to the optimized circuit design and upgraded control programme. While it can control multiple units of a VRV system, it also offers electrical leakage detection, phase reversal protection and surge protection.



Daikin HIG Smart PCB

- Highly integrated
- Size reduced by 50%
- More stable operation

Conventional PCB

Reliable And Stable System

Stepless Inverter Technology

Stepless inverter PCB

The VRV X7 Series adopts the DC inverter technology and the inverter PCB that supports precise stepless frequency control and energy-saving operation.




The inverter PCB of the compressor

DIS inverter control circuit

Daikin's DIS inverter control circuit combines DIP-IPM and sensorless technology to deliver smoother sine wave and higher inverter efficiency.

- DIP-IPM significantly reduces the inverter energy consumption
- Sensorless technology prevents inverter energy consumption caused by the error of sensor

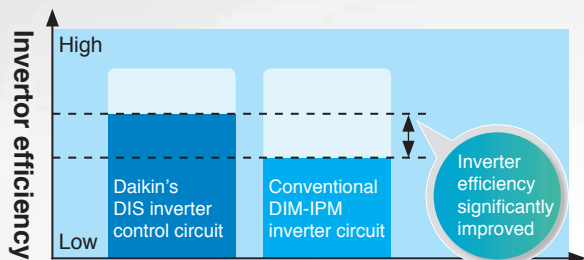

The graph above is for illustration only



DC Fan Motor and Stepless Inverter PCB for Fan

The VRV X7 outdoor unit comes with a DC outdrive motor (ODM) that significantly improves the efficiency and lowers the energy consumption of the outdoor unit. The inverter PCB for the fan is precisely controlled by a sophisticated stepless inverter to further lower the energy consumption.

NEW DC INVERTER ODM DEVICE

INVERTER PCB FOR FAN



ODM (outdrive motor)



Reliable And Stable System


Ultra-High External Static Pressure Optimizes Heat Ejection for Outdoor Units

External static pressure of up to 110Pa ensures efficient heat ejection

With an ultrahigh external static pressure of up to 110Pa, the VRV X7 outdoor units can effectively eject heat and operate stably whether they are in a collective installation or on different levels.


Up to 110Pa

- Flexible free area ratio / louvre angle
- Ensure effective heat ejection for individual or collective installation

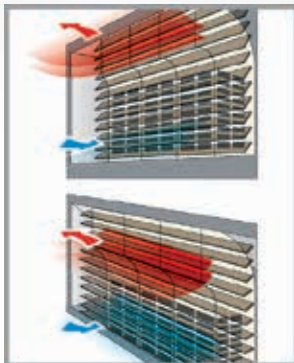

Airflow Simulation (Adequate External Static Pressure)

Under identical installation conditions, VRV X7 Series demonstrates better ventilation and optimizes the operation of the outdoor units.

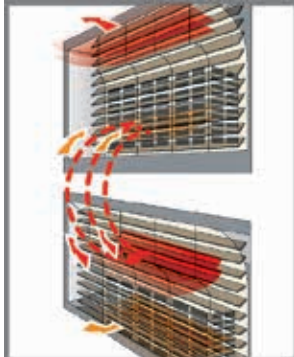

Airflow Simulation (Inadequate External Static Pressure)


Insufficient external static pressure may lead to short circuit, affecting the system performance or even causing a system breakdown.

Note: Please ensure that there is enough room for ventilation, maintenance and air discharge when an outdoor unit is installed in a plant room. For details, please consult professional Daikin engineers.

Excellent Operation Performance in Compact Design


Energy Saving

Improve COP Performance

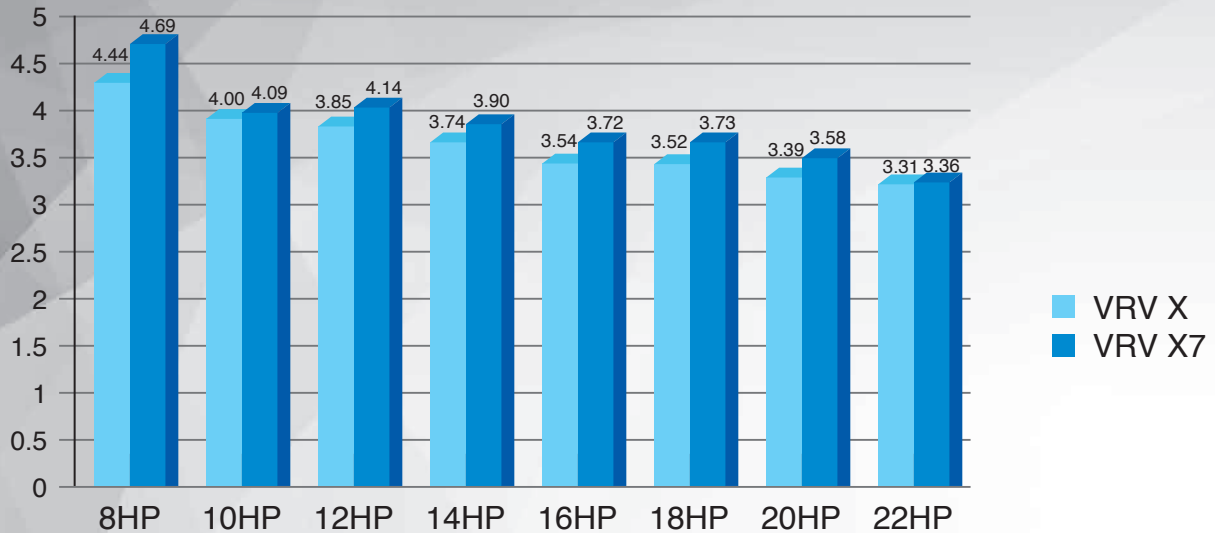

Energy Efficiency


Maximum IPLV(C) reached 9.6

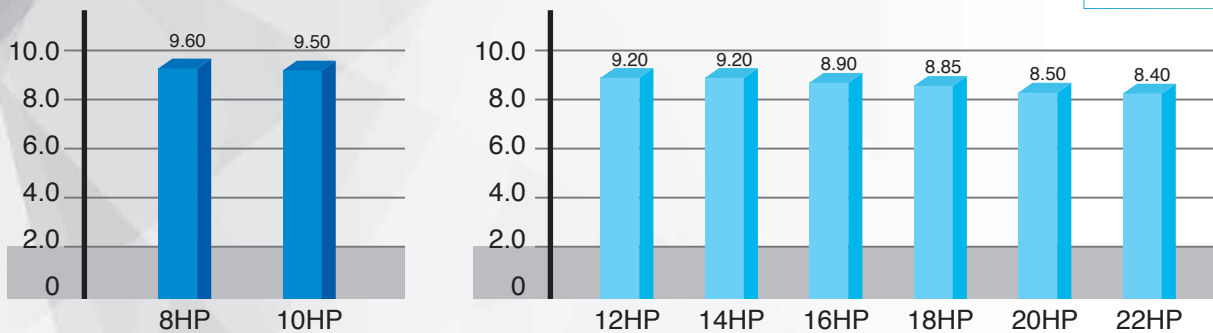

Note : Based on GB21454-2008 standard, the multiple connections air conditioning (heat pump) system and energy grading is using IPLV(C).

THE INTEGRATED PART LOAD VALUE IPLV(C)

IPLV(C) based on GB/T18837-2002 standard, is used to indicate efficiency of multiple connections air conditioning system, like VRV. IPLV(C) is an efficiency summary of a system at 4 different loadings(100%, 75%, 50% and 25%).

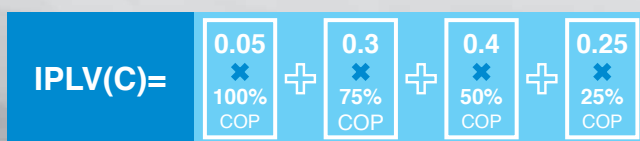

IPLV(C) ENERGY LABELLING SCHEME


Based on GB21454-2008 standard, multiple connections air conditioning (heat pump) system and energy grading, there are 5 gradings IPLV(C) and Grade 1 is the highest.

Cooling Capacity(CC)W	Energy Label Grading				
	Grade 5	Grade 4	Grade 3	Grade 2	Grade 1
cc≤28000	2.80	3.00	3.20	3.40	3.60
28000≤cc≤84000	2.75	2.95	3.15	3.35	3.55

More Flexible System Design

More Options for Installation Location

Multiple use

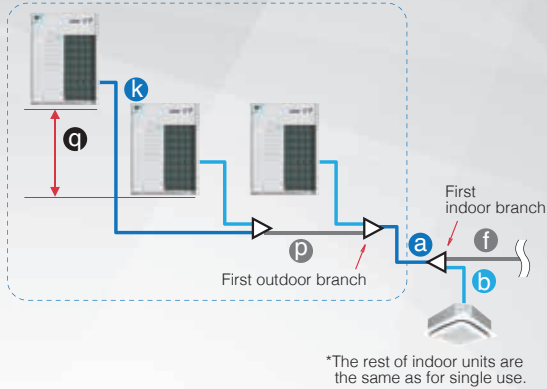

Single use



Long piping length

The long piping length provides more design flexibility, which can match even large-sized buildings.

When only VRV indoor units are connected

- 200 m** Max. actual piping length
 - 240 m** Max. equivalent piping length
 - 1000 m** Max. total piping length
- Outdoor unit above indoor unit:
- 100 m^{^1}** Max. level difference between the outdoor units and the indoor units
- ^{^1}. Level differences above 50m are available on request.
- Outdoor unit below indoor unit:
- 110 m^{^2}**
- ^{^2}. Level differences above 90m are available on request.

	Actual piping length	Example	Equivalent piping length	
Maximum allowable piping length	Refrigerant piping length	200 m	a+f+g+h+i	240 m
	Total piping length	1000 m	a+b+c+d+e+f+g+h+i	—
	Between the first indoor branch and the farthest indoor unit	120 m ^{^1}	f+g+h+i	—
	Between the outdoor branch and the last outdoor unit	10 m	k+p	13 m

	Level Difference	Example		
Maximum allowable level difference	Between the outdoor units (Multiple use)	5 m	q	
	Between the indoor units	40 m	s	
	Between the outdoor units and the indoor units	If the outdoor unit is above.	Available on request 100 m ^{^2}	r
		If the outdoor unit is below.	Available on request 110 m ^{^3}	f

^{^1}. No special requirements up to 40 m. The maximum actual piping length can be 120 m, depending on conditions. Various conditions and requirements have to be met to allow utilisation of 120 m piping length. Be sure to refer to the Engineering Data Book for details of these conditions and requirements.
^{^2}. Level differences above 50 m are not supported by default but are available on request (If the outdoor unit is above the indoor unit).
^{^3}. Level differences above 90 m are not supported by default but are available on request (If the outdoor unit is below the indoor unit).


Project Running Will Be More Flexible

Centralized Air Conditioning System Makes It More Flexible


Daikin VRV X7 system is a centralized air conditioning system. Main components are indoor and outdoor unit.

It makes everything simply to ensure the quality of installation and complete the project on time.

Traditional Air-Conditioning System

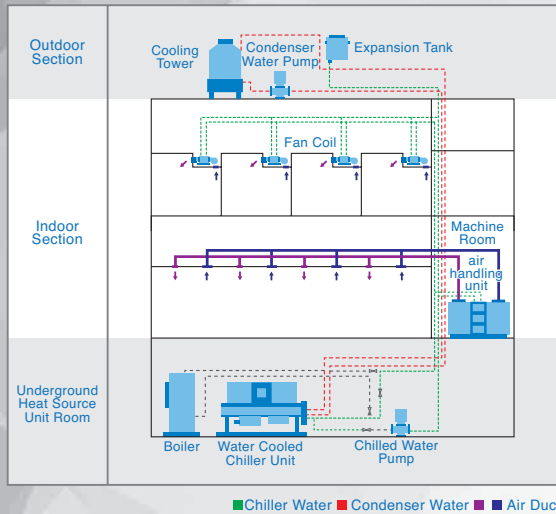


VRV X7 Air-Conditioning System

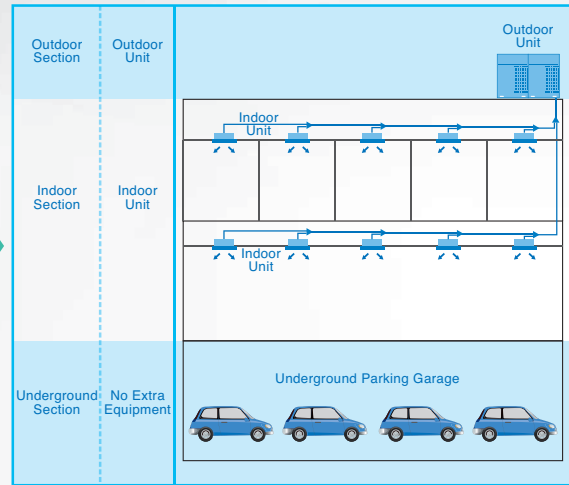


Design Stage

Traditional Air Conditioning System

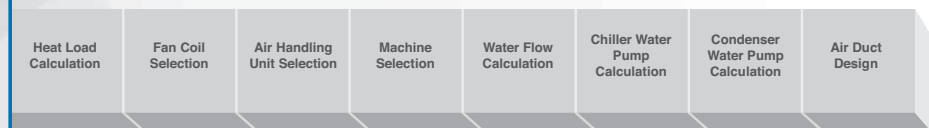


VRV X7 Air Conditioning System

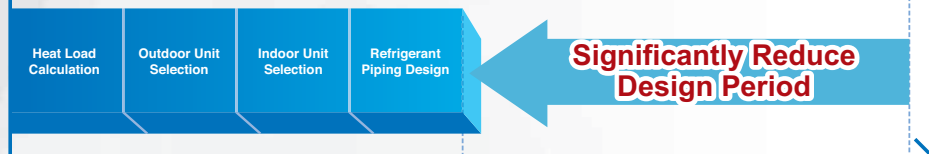

Installation Stage

Traditional Air Conditioning System

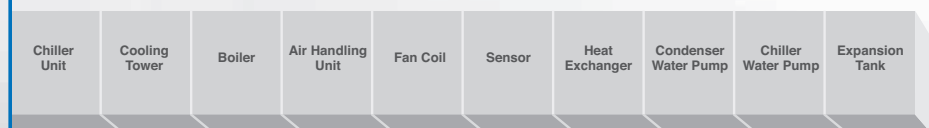


VRV X7 Air Conditioning System



Project Running Will Be More Flexible

More flexible installation

VRV X7 is a flexible system which allows customers to increase cost effectiveness by completing the installation phase by phase.

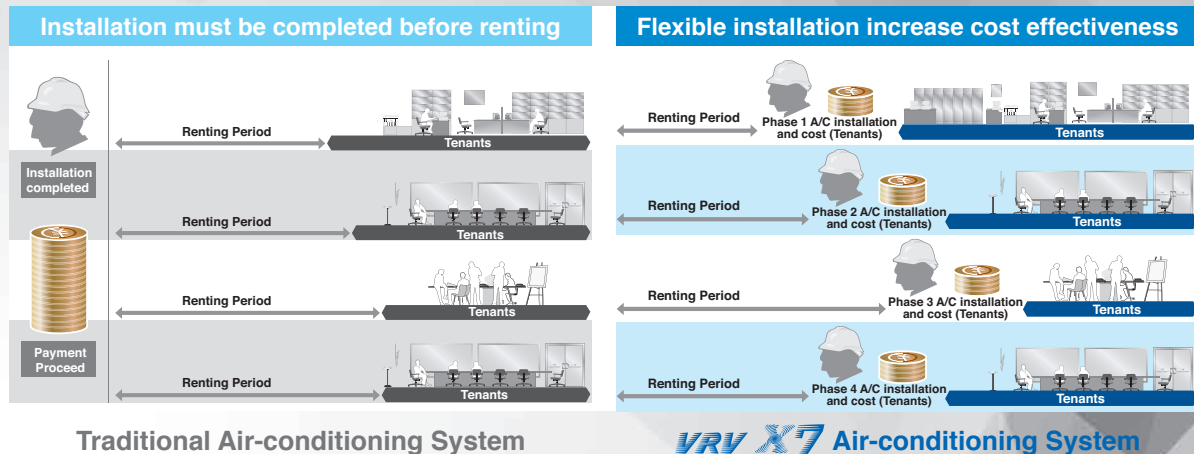

Quiet Operation

Lower operation sound

Improves heat exchanger efficiency, helps to reduce operation sound.

Large airflow, high static pressure and quiet technology

Without increasing operation sound, advanced analytic technologies are utilized to optimise fan design and increase airflow rate and high external static pressure of 110 Pa.

<p>Streamlined air grille It promotes the discharge of swirling airflow, further reducing the pressure loss.</p>	<p>Streamlined scroll fan The sharp edge of each fan blade has a certain curvature, reducing both the vibration and the pressure loss.</p>
---	---

Various Low Operation Sound Technologies for a Tranquil Environment

Enjoy wonderful quietness indoor environment

The ceiling mounted cassette (round flow) indoor unit features a turbo fan with serrated edges to achieve a silent environment. The laser welding technology also ensures quiet and reliable operation. The duct type indoor units feature a Sirocco multi-blade fan with a suction inlet with interior wavy patterns. The 3D airflow fan blades, rotating shaft, dislocated design and non-equidistant structure can effectively minimize the operating sound level.

Minimize outdoor noise pollution

The new cotton insulation fits the compressor perfectly to cushion vibration and minimize the noise level. Outdoor units also feature a silent night mode that allows them to operate at a minimal operating sound level of 40dB.*

*Note: Internal test results

Indoor Unit

VRV





**Ceiling Mounted Cassette
(Round Flow with Sensing) Type**




**Ceiling Mounted Duct
(3D Airflow with Sensing)
(3D Airflow) Type**

VRV Indoor Units

Daikin offers a wide range of VRV indoor units responding to variety of needs of our customers that require air-conditioning solutions.

Ceiling Mounted Cassette (Round Flow with Sensing) Type
FXFSP-BA



New

- 360° even airflow for added comfort
- Detects human activities and adjusts airflow smartly
- Detects the floor temperature to create a consistently comfortable environment

Ceiling Mounted Cassette (Round Flow) Type
FXFP-LVC



- 360° airflow improves temperature distribution and offers a comfortable living environment.

Ceiling Mounted Duct (3D Airflow with Sensing) Type
FXDSP-ABP



- Presence of people and floor temperature can be detected to provide comfort and energy savings.

Ceiling Mounted Duct (3D Airflow) Type
FXDAP-ABP



- 3D airflow improves temperature distribution and offers a comfortable living environment.

Slim Ceiling Mounted Duct (Compact) Type
FXDP-QPVC



Slim Ceiling Mounted Duct Type
FXDP-QPVC



- Slim design, quietness and static pressure switching.

Ceiling Mounted Duct Type
FXMP-BA(BB)



New

- Supports 14 levels of external static pressure auto-adjustment for easier installation
- External static pressure of up to 200Pa enables flexible duct setting


Ceiling Mounted Built-in Type
FXSP-CA



New

- High external static pressure enables flexible duct setting

Ceiling Mounted Cassette (Double Flow) Type
FXCP-MMVC



- Thin, lightweight and easy to install in narrow ceiling spaces.

Ceiling Mounted Cassette Corner Type
FXCP-EPVC




- Slim design for flexible installation.

Floor Standing Type
FXNP-MLVC



Concealed Floor Standing Type
FXNP-MNVC



- Suitable for perimeter zone air conditioning.

Ceiling Mounted Duct (Large Capacity) Type
FDXQA020AA



New

- High capacity of 50kW for large space
- External static pressure of up to 550Pa

Wall Mounted Type
FXAP-NVC



- Stylish flat panel design harmonised with your interior décor.




VRV Indoor Units

Ceiling Mounted Cassette (Round Flow with Sensing) Type

FXFSP – BA
 FXFSP22/28/36/45/56/71/
 80/90/100/112/125/140BA




Presence of people and floor temperature can be detected to provide comfort and energy savings

 PM2.5 filter (option)
 Type F wired remote controller (option)
 LCD wireless remote controller BRC7L611 (option)

Intelligent Individual Airflow Direction Control


The four discharge outlets can be controlled individually to create 625 different airflow angle combinations. The intelligent control can prevent exposure to direct wind.

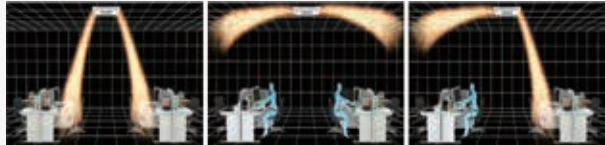

Dual Sensors

Infrared Presence Sensor

The intelligent presence sensor detects the human movement in a room and adjusts the louver angle to avoid direct wind.



Infrared Floor Temperature Sensor

The sensor detects the floor temperature and adjusts the system accordingly, offering a consistent and comfortable experience.



360° Even Airflow Discharge

The 360° airflow discharge leads to uniform temperature distribution across the room without dead corners. The gentle wind speed offers added comfort.



Energy-Saving Mode in Unoccupied Space

With the latest infrared presence sensor, when the room is unoccupied, the system will automatically adjust the temperature (higher temperature when the room is cold or vice versa).



Optional PM2.5 Filter


The PM2.5 filters installed at the return air inlets can maintain the freshness of air.



Top-Down Airflow for High Ceiling Space

The system easily fits in any space with a high ceiling up to 4.2m*.

*Remote control setting required



New Glossy White Panel Design (by Daikin)

The new glossy white front panel helps deliver air to all directions and prevents dew condensation.

VRV Indoor Units

Ceiling Mounted Duct (3D Airflow with Sensing) Type (3D Airflow) Type



FXDSP-ABP
3D Airflow with Sensing





FXDAP-ABP
3D Airflow

FXDSP - ABP FXDAP - ABP

- FXDSP / FXDAP22
- FXDSP / FXDAP25
- FXDSP / FXDAP28
- FXDSP / FXDAP32
- FXDSP / FXDAP36
- FXDSP / FXDAP40
- FXDSP / FXDAP45
- FXDSP / FXDAP50
- FXDSP / FXDAP56
- FXDSP / FXDAP63
- FXDSP / FXDAP71


Infrared Presence Sensor

The presence sensor adjusts the set point if no one is detected in the room. It also automatically directs air flow away from people to avoid draughts.

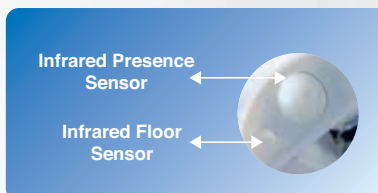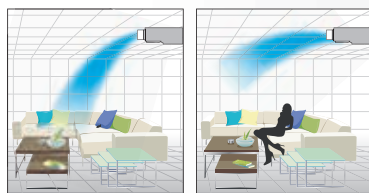

Infrared Floor Sensor

The floor sensor detects the average floor temperature and ensures even temperature distribution between ceiling and floor.

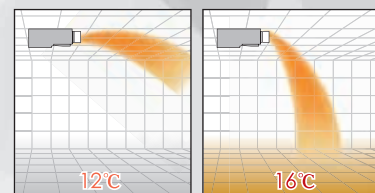

Stylish panel

- Stylish flat panel design creates a graceful harmony that enhances any interior space
- Flap close automatically when the unit stops, which gives a simple appearance
- Panel with non-flocking surface can prevent dew condensation

Comfortable airflow

Airflow angles can be set by remote controller (BRC1F611) to prevent draft

form vertical 0-60°
and horizontal 45°
each side




Energy saving operation – DC fan motor

The use of a DC fan motor offers substantial improvements in operating efficiency

Slim design

Only 200 mm height and can be installed in a ceiling space of 240 mm



For FXDSP-ABP

- Type E wired remote controller (option)
- Type F wired remote controller (option)
- LCD wireless remote controller BRC4L611 (option)

For FXDAP-ABP

- Type E wired remote controller (option)
- Type F wired remote controller (option)
- LCD wireless remote controller BRC4L621 (option)

VRV Indoor Units

Ceiling Mounted Cassette (Round Flow) Type


FXFP - LVC

FXFP28 / FXFP36 / FXFP45
 FXFP56 / FXFP71 / FXFP80
 FXFP90 / FXFP100 / FXFP112
 FXFP125 / FXFP140




360° airflow improves temperature distribution and offers a comfortable living environment.

- The industry's first* Round Flow Ceiling Mounted Cassette type offers 360° airflow with improved temperature distribution.



There are areas of uneven temperature.



There are much fewer areas of uneven temperature.


* As of April 2004, the release date for Japan.

- Control of the airflow rate can be selected from 3-step control.




- The light weight unit at 20 kg for FXFP28-45LVC models makes installation easy.

- Drain pump is equipped as a standard accessory with a 850 mm lift.




- A modern sophisticated decoration panel has been applied, with a panel surface that has been treated with a dirt-repellant coating.

Treated surface



Resists soiling

Untreated surface



Dirt and grime

Condition after exposure to the smoke of 600 cigarettes in 1m³ enclosed space.

- The horizontal louvres prevent dew condensation. Their non-flocking surfaces, which repel dirt, are easy to clean.



PM2.5 filter (option)



Type E wired remote controller (option)



Type F wired remote controller (option)



Type C wired remote controller BRC1C611 (option)



LCD wireless remote controller BRC7F634F1 (option)



LCD wireless remote controller BRC7F634K1 (option)

VRV Indoor Units

Slim Ceiling Mounted Duct Type

FXDP - QPVC


FXDP22 / FXDP25 / FXDP28 /
FXDP32 / FXDP36 / FXDP40 /
FXDP45 / FXDP50 / FXDP56 /
FXDP63 / FXDP71

FXDP - QPVC

FXDP80 / FXDP90 /
FXDP100 / FXDP112

Suited to use in drop-ceilings!

Great for hotel use!

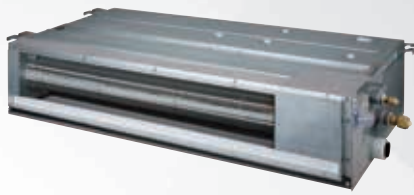

Slim Ceiling Mounted Duct (Compact) Type




Slim Ceiling Mounted Duct Type

Slim design, quietness and static pressure switching




- Control of the airflow rate has been improved from 2-step to 3-step control.

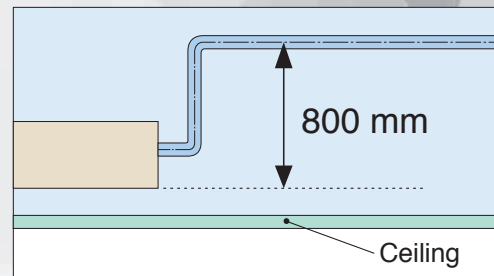

- FXDP-QPVC models are available in two types to suit different installation conditions. Drain pump is equipped as a standard accessory with a 800 mm lift.

*Slim Ceiling Mounted Duct (Compact) Type: with a drain pump (750 mm lift) as a standard accessory.

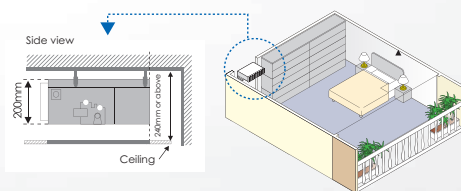

- Only 200 mm height end can be installed in ceiling space as narrow as 240 mm.
- External static pressure selectable by remote controller switching make this indoor unit a very comfortable and flexible model.

10Pa - 30Pa / factory set: 10Pa for FXDP22-45
20Pa - 50Pa / factory set: 20Pa for FXDP50-71
20Pa - 40Pa / factory set: 20Pa for FXDP80-112

Type E wired remote controller (option)

Type F wired remote controller (option)

Type C wired remote controller BRC1C611 (option)

LCD wireless remote controller BRC4L631 for compact type(option)

LCD wireless remote controller BRC4C651 for large type (option)

VRV Indoor Units

Ceiling Mounted Duct Type

FXMP-BA (BB)

FXMP28/36/40/45/90/112/140/
160BA FXMP56/63/71BB

New



PM2.5 filter
(option)



Type E wired
remote controller
(option)



Type F wired
remote controller
(option)




Type C wired
remote controller
BRC1C611 (option)





LCD wireless
remote controller
BRC4C651 (option)

Ultra-High External Static Pressure for More Flexible Installation

With an external static pressure of up to **200Pa**, the unit can flexibly fit different types on installation space.



Partitioned Installation Design



Space with High Ceiling Design



Flexible Static Pressure

Supports **14 levels of static pressure** adjustment that can be set using the remote control to meet different needs.

- **Manual adjustment**
Users may set the external static pressure (up to 14 levels, depending on the capacity level) using the remote control.

- **Automatic adjustment**
Under the "Auto airflow rate" mode, the unit automatically detects and adjusts the static pressure.



Flexible Outlet Designs

Various outlet designs are available to match different rooms and styles.


VRV Indoor Units

Ceiling Mounted Built-In Type


FXSP – CA
 FXSP22/28/36/45/56/71/80/90
 /100/112/125/140/150/160CA

New







PM2.5 filter
(option)




Type E wired
remote controller
(option)



Type F wired
remote controller
(option)



Type C wired
remote controller
BRC1C611 (option)




LCD wireless
remote controller
BRC4C651 (option)




High Level of Adaptability for Different Room Type Installations

The air outlets can be installed away from the main unit in an L-shaped or U-shaped room type to match the locations of lighting fixtures or human activities. Even air distribution and optimal comfort can be achieved in an irregular space.

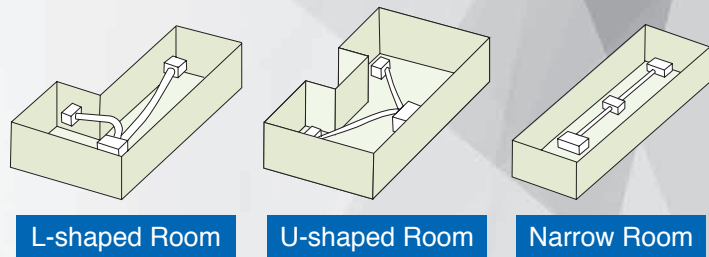


Compact Design with Large Capacity

The unit is just **250mm** in thickness and **700mm** in depth. With a capacity of **2.2kW to 16kW**, it works with a duct to blend in with the interior décor, and creates a comfortable and beautiful space regardless of its size.

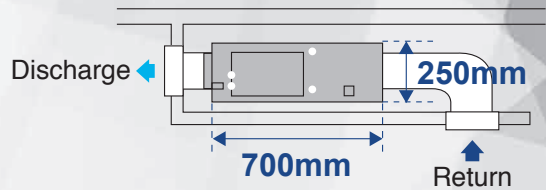


Flexible and Convenient Air Return Method

To change the air return method, simply remove the bottom panel and reinstall it on the back slot. No extra work is required on-site, simplifying the installation and shortening the installation time.

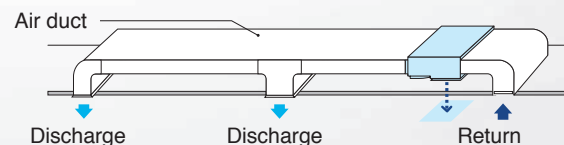

Default setting (back return)

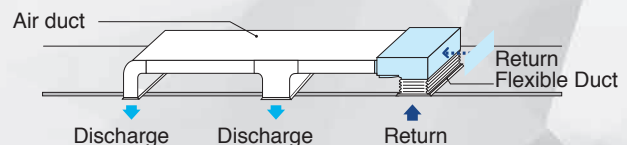


On-site installation (bottom return)


VRV Indoor Units

Ceiling Mounted Cassette (Double Flow) Type

FXCP - MMVC

FXCP22 / FXCP28 / FXCP36
 FXCP45 / FXCP56 / FXCP71
 FXCP90 / FXCP140

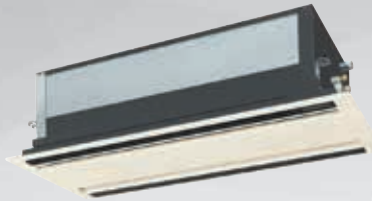




Type E wired
remote controller
(option)



Type F wired
remote controller
(option)




Type C wired
remote controller
BRC1C611 (option)




Thin, lightweight, and easy to install in narrow ceiling spaces

- The thin unit (only 305 mm high) can be installed in a ceiling space as narrow as 350 mm. All models feature a compact design with a depth of only 600 mm.

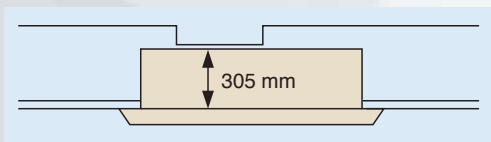

- Drain pump is equipped as standard accessory with 600 mm lift.

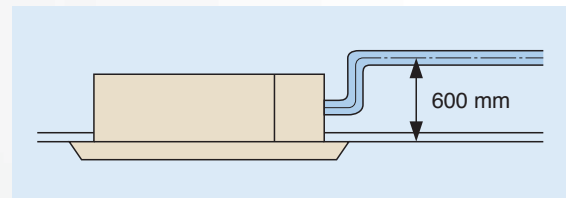

- Designed with higher airflow suitable for high ceiling application up to 3 metres.
- Providing 2 different settings of standard and ceiling soiling prevention, the auto swing mechanism realises even distribution of airflow and room temperature.


- Major maintenance work can be performed by removing the panel. A flat-type suction grille and a detachable blade make cleaning easy.

VRV Indoor Units

Ceiling Mounted Cassette Corner Type



FXCP - EPVC

FXCP22 / FXCP25 / FXCP28
 FXCP32 / FXCP36 / FXCP40
 FXCP45 / FXCP50 / FXCP56
 FXCP63 / FXCP71


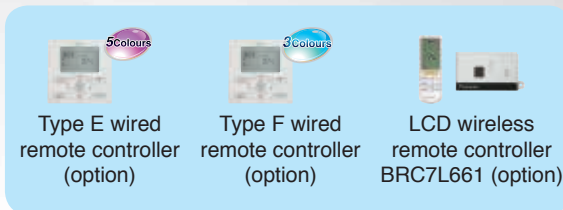


Slim design for flexible installation


- The unit can be installed in the minimum space of 200 mm above.



- Single-flow type allows effective air discharge from corner or from drop-ceiling.
- Drain pump is equipped as standard accessory with 850 mm lift.



- Providing 3 different settings of standard, draft prevention and ceiling soiling prevention, the auto swing mechanism realises even distribution of airflow and room temperature.

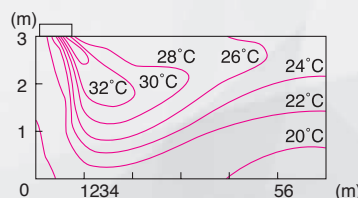





VRV Indoor Units

Floor Standing Type

Suitable for perimeter zone air conditioning


- Floor Standing types can be hung on the wall for easier cleaning. Running the piping from the back allows the unit to be hung on walls. Cleaning under the unit, where dust tends to accumulate, is considerably easier.
- The adoption of a fibre-less discharge grille featuring an original design to prevent condensation also helps prevent staining and makes cleaning easier.

 <p>5 Colours</p>	 <p>3 Colours</p>
<p>Type E wired remote controller (option)</p>	<p>Type F wired remote controller (option)</p>
	
<p>Type C wired remote controller BRC1C611 (option)</p>	<p>LCD wireless remote controller BRC4C623 (option)</p>



FXNP - MLVC



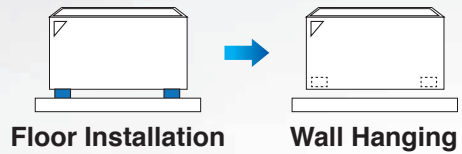

FXNP22 / FXNP28
FXNP36 / FXNP45
FXNP56 / FXNP71



Concealed Floor Standing Type

Designed to be concealed in the perimeter skirting-wall

- The unit is concealed in skirting-wall of perimeter, that enables to create high class interior design.
- The connecting port faces downward, greatly facilitating on-site piping work.

 <p>5 Colours</p>	 <p>3 Colours</p>
<p>Type E wired remote controller (option)</p>	<p>Type F wired remote controller (option)</p>
	
<p>Type C wired remote controller BRC1C611 (option)</p>	<p>LCD wireless remote controller BRC4C623 (option)</p>



FXNP - MNVC

FXNP22 / FXNP28
FXNP36 / FXNP45
FXNP56 / FXNP71




VRV Indoor Units


Ceiling Mounted Duct (Large Capacity) Type




FDXQA-AA
FDXQA020AA



Type C wired remote controller
BRC1C611 (option)



5 Colours
Type E wired remote controller (option)




3 Colours
Type F wired remote controller (option)



The Indoor Unit Special Made for Large Space with Ultrahigh Static Pressure of Up to 550Pa

The ultrahigh external static pressure helps the air delivery in large space design that fit all kinds of discharge systems and accessories, delivering comfortable airflow to all corners.

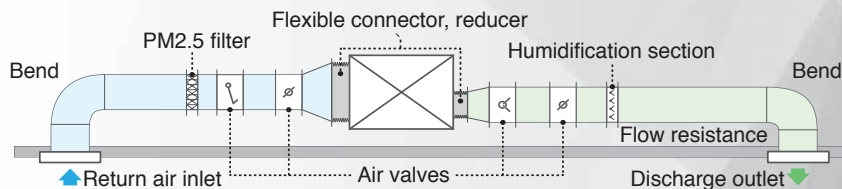

Part	Pressure loss (in Pa)							
	Discharge outlet	Bend	Flexible connector/ reducer	Return air inlet	PM2.5 filter	Humidification section	Air valves	Air duct
Pressure loss per unit	10	5	20	10	110	40	30	1
Quantity	1	2	2	1	1	1	4	60m
Total pressure loss	10	10	40	10	110	40	120	60

Total pressure loss of 400Pa, far below 500Pa


Wall Mounted Type

FXAP - NVC
FXAP22 / FXAP28 / FXAP36




Stylish flat panel design harmonised with your interior décor


- Stylish flat panel design creates a graceful harmony that enhances any interior space.
- Flat panel can be cleaned with only the single pass of a cloth across their smooth surface.
- Flat panel can also be easily removed and washed for more thorough cleaning.
- Low operation sound level
- 5 steps of discharge angle can be set by remote controller.
- Discharge angle is automatically set at the same angle as the previous operation when restarting (Initial setting: 10° for cooling and 70° for heating).
- Comfortable air distribution
Auto-swing realises efficiency of air distribution.
The louvre closes automatically when until stops.




LCD wireless remote controller
BRC7E718W (option)



5 Colours
Type E wired remote controller (option)



3 Colours
Type F wired remote controller (option)



Type C wired remote controller
BRC1C611 (option)



Heating Operation



Cooling Operation

Indoor Unit Lineup

Ceiling Mounted Cassette (Round Flow with Sensing) Type



Model	FXFSP 22BA	FXFSP 26BA	FXFSP 36BA	FXFSP 45BA	FXFSP 56BA	FXFSP 71BA	FXFSP 80BA	FXFSP 90BA	FXFSP 100BA	FXFSP 112BA	FXFSP 125BA	FXFSP 140BA
1 - Phase 220V, 50Hz												
Rated Cooling Capacity	kW											
Rated Heating Capacity	kW											
Rated Power Consumption	Cooling	W										
	Heating	W										
Dimension (H x W x D)	mm											
Airflow Rate	m ³ /min											
Sound Level	dB(A)											
Piping Connections	Liquid	mm										
	Gas	mm										
	Drain	mm										
Included lift pump head	mm											
Machine Weight	kg											
Max. Fuse Amps	MFA											
Min. Circuit Amps	MCA											
Panel Option	Model											
	Dimension	mm										
	Weight	kg										
PM2.5 Filter Options	Model (filter / replacement filter)											
	Process Airflow Rate	m ³ /min										
	Initial Pressure Drop (final pressure drop)	Pa										

* Choosing optional PM2.5 electrostatic filter for PM2.5 purification function

Ceiling Mounted Cassette (Round Flow) Type



Model	FXFP28 LVC	FXFP36 LVC	FXFP45 LVC	FXFP56 LVC	FXFP71 LVC	FXFP80 LVC	FXFP90 LVC	FXFP100 LVC	FXFP112 LVC	FXFP125 LVC	FXFP140 LVC
1 - Phase 220V, 50Hz											
Rated Cooling Capacity	kW										
Rated Heating Capacity	kW										
Rated Power Consumption	Cooling	W									
	Heating	W									
Dimension (H x W x D)	mm										
Airflow Rate	m ³ /min										
Sound Level	dB(A)										
Piping Connections	Liquid	mm									
	Gas	mm									
	Drain	mm									
Included lift pump head	mm										
Machine Weight	kg										
Max. Fuse Amps	MFA										
Min. Circuit Amps	MCA										
Panel Option	Model										
	Dimension	mm									
	Weight	kg									
PM2.5 Filter Options	Model (filter / replacement filter)										
	Process Airflow Rate	m ³ /min									
	Initial Pressure Drop (final pressure drop)	Pa									

* Choosing optional PM2.5 electrostatic filter for PM2.5 purification function

Ceiling Mounted Cassette (Double Flow) Type



Model	FXCP22 MMVC	FXCP28 MMVC	FXCP36 MMVC	FXCP45 MMVC	FXCP56 MMVC	FXCP71 MMVC	FXCP90 MMVC	FXCP140 MMVC
1 - Phase 220V, 50Hz								
Rated Cooling Capacity	kW							
Rated Heating Capacity	kW							
Rated Power Consumption	Cooling	W						
	Heating	W						
Dimension (H x W x D)	mm							
Airflow Rate	m ³ /min							
Sound Level	dB(A)							
Piping Connections	Liquid	mm						
	Gas	mm						
	Drain	mm						
Included lift pump head	mm							
Machine Weight	kg							
Max. Fuse Amps	MFA							
Min. Circuit Amps	MCA							
Panel Option	Model							
	Dimension	mm						
	Weight	kg						

Indoor Unit Lineup

Ceiling Mounted Duct (Large Capacity) Type



	Model	FDXQA020AA		
	Power Supply	3 - Phase 380V, 50Hz		
	Rated Cooling Capacity	kW	50.0	
	Rated Heating Capacity	kW	56.0	
	Rated Power Consumption	Cooling	kW	6.1
		Heating	kW	6.4
	Dimension (H x W x D)	mm 665 x 1980 x 850		
	Airflow Rate	m ³ /min	153.3	
	External Static Pressure	Pa	500	
	Sound Level	dB(A)	66	
	Piping Connections	Liquid	mm	Ø 15.9
		Gas	mm	Ø 28.6
		Drain	RP1 (Internal Thread)	
	Machine Weight	kg	258	
	Max. Fuse Amps	MFA	A	30
Min. Circuit Amps	MCA	A	10	
Option	Temperature Sensor	BRY42A50		

* When return inlets are installed outside of the air conditioned area, temperature sensor is recommended for accurate measurement of the actual temperature of the air conditioned area.

Ceiling Mounted Duct (3D Airflow with Sensing / 3D Airflow) Type



	Ceiling Mounted Duct (3D Airflow with Sensing) Type FXDSP—ABP		Ceiling Mounted Duct (3D Airflow) Type FXDAP—ABP	Model	FXDSP 22ABP	FXDSP 25ABP	FXDSP 28ABP	FXDSP 32ABP	FXDSP 36ABP	FXDSP 40ABP	FXDSP 45ABP	FXDSP 50ABP	FXDSP 56ABP	FXDSP 63ABP	FXDSP 71ABP		
				Power Supply	1 - Phase 220V, 50Hz												
				Rated Cooling Capacity	kW	2.2	2.5	2.8	3.2	3.6	4.0	4.5	5.0	5.6	6.3	7.1	
				Rated Heating Capacity	kW	2.5	2.8	3.2	3.6	4.0	4.5	5.0	5.6	6.3	7.1	8.0	
				Rated Power Consumption	Cooling	W	28	29	32	38	49	54					
					Heating	W	24	25	28	34	45	50					
				Dimension (H x W x D)	mm	200 x 700 x 450						200 x 900 x 450			200 x 1100 x 450		
				Panel Size (H x W x D)	mm	180 x 722 x 116* (60 in Suspended Ceiling)						180 x 922 x 116* (60 in Suspended Ceiling)			180 x 1122 x 116* (60 in Suspended Ceiling)		
						180 x 722 x 70** (60 in Suspended Ceiling)						180 x 922 x 70** (60 in Suspended Ceiling)			180 x 1122 x 70** (60 in Suspended Ceiling)		
				Outlet Size (H x W)	mm	131 x 525						131 x 725			131 x 925		
				Airflow Rate (High/medium-high/medium/medium-low/low)	m ³ /min	8.7/8.1/7.6/7.0/6.5	9.0/8.5/8.0/7.5/7.0	10.0/9.3/8.6/7.9/7.2	10.7/10.1/9.4/8.7/8.0	12.0/11.2/10.5/9.7/9.0	15.0/14.0/13.0/11.5/10.5	19.0/17.0/15.0/13.0/11.5					
				Sound Level (High/medium-high/medium/medium-low/low)	dB(A)	31/29/27/26/24		34/32/30/29/27		36/35/33/31/29		39/37/35/33/31			39/37/35/33/30		
				External Static Pressure (High / Standard)	Pa	10/0											
				Piping Connections	Liquid	mm	Ø 6.4						Ø 9.5				
					Gas	mm	Ø 12.7						Ø 15.9				
Drain	I.D.Ø20 x O.D.Ø26 (PVC26)																
Included lift pump head	mm	750						20			23						
Machine Weight	kg	17						20			23						
Max. Fuse Amps	MFA	16						0.63			0.66						
Min. Circuit Amps	MCA	0.38		0.4		0.48		0.5		0.6		0.63		0.66			

*1 Applicable to FXDSP~ABP model *2 Applicable to FXDAP~ABP model

Slim Ceiling Mounted Duct (Compact) Type



	Model	FXDP22 QPVC	FXDP25 QPVC	FXDP28 QPVC	FXDP32 QPVC	FXDP36 QPVC	FXDP40 QPVC	FXDP45 QPVC	FXDP50 QPVC	FXDP56 QPVC	FXDP63 QPVC	FXDP71 QPVC		
	Power Supply	1 - Phase 220V, 50Hz												
	Rated Cooling Capacity	kW	2.2	2.5	2.8	3.2	3.6	4.0	4.5	5.0	5.6	6.3	7.1	
	Rated Heating Capacity	kW	2.5	2.8	3.2	3.6	4.0	4.5	5.0	5.6	6.3	7.1	8.0	
	Rated Power Consumption	Cooling	W	72	75	78	81	93	180	196				
		Heating	W	56	59	62	65	76	152	168				
	Dimension (H x W x D)	mm	200 x 700 x 450						200 x 900 x 450			200 x 1100 x 450		
	Outlet Size (H x W)	mm	153 x 660						153 x 860			153 x 1060		
	Airflow Rate (High/medium-high/medium/medium-low/low)	m ³ /min	8.7/8.1/7.6/7.0/6.5	9.0/8.5/8.0/7.5/7.0	9.2/8.7/8.2/7.7/7.2	10.0/9.5/9.0/8.5/8.0	11.5/11.0/10.5/9.5/9.0	15.0/14.0/13.0/11.5/10.5	19.0/17.0/15.0/13.0/11.5					
	External Static Pressure	Pa	30/10						50/20			50/20		
	Sound Level (High/medium-high/medium/medium-low/low)	dB(A)	27/26/25/24/23		28/27/26/25/24		29/28/27/26/25		30/29/28/27/26			34/33/32/31/30		
	Piping Connections	Liquid	mm	Ø 6.4						Ø 9.5				
		Gas	mm	Ø 12.7						Ø 15.9				
		Drain	I.D.Ø20 x O.D.Ø26 (PVC26)											
	Included lift pump head	mm	750						20			23		
Machine Weight	kg	17						20			23			
Max. Fuse Amps	MFA	15						1.1			1.2			
Min. Circuit Amps	MCA	0.7						1.1			1.2			


Works with Type C wired remote controller (BFC1C611) to support 3-speed airflow adjustment.

Indoor Unit Lineup

Slim Ceiling Mounted Duct Type




Model		FXDP80QPVC	FXDP90QPVC	FXDP100QPVC	FXDP112QPVC
Power Supply		1 - Phase 220V, 50Hz			
Rated Cooling Capacity	kW	8.0	9.0	10.0	11.2
Rated Heating Capacity	kW	9.0	10.0	11.2	12.5
Rated Power Consumption	Cooling	140		188	
	Heating	120		168	
Dimension (H x W x D)	mm	200 x 1610 x 560			
Outlet Size (H x W)	mm	153 x 1570			
Airflow Rate	m ³ /min	24/20/16		26/22/18	
External Static Pressure	Pa	40/20			
Sound Level	dB(A)	36/34/32		37/35/33	
Piping Connections	Liquid	Ø 9.5			
	Gas	Ø 15.9			
	Drain	I.D.Ø20 x O.D.Ø26 (PVC26)			
Included lift pump head	mm	800			
Machine Weight	kg	37		40	
Max. Fuse Amps	MFA	A		A	
Min. Circuit Amps	MCA	0.7		1.0	



Concealed Floor Standing Type



Model		FXNP22MNV	FXNP28MNV	FXNP36MNV	FXNP45MNV	FXNP56MNV	FXNP71MNV
Power Supply		1 - Phase 220V, 50Hz					
Rated Cooling Capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
Rated Heating Capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0
Rated Power Consumption	Cooling	49		90		110	
	Heating	49		90		110	
Dimension (H x W x D)	mm	610 x 930 x 220		610 x 1070 x 220		610 x 1350 x 220	
Outlet Size (H x W)	mm	130 x 562		130 x 702		130 x 982	
Airflow Rate	m ³ /min	6.8/5.8		8.0/6.0		10.1/8.0	
Sound Level	dB(A)	36/33		36/32		38/33	
Piping Connections	Liquid	mm		Ø 6.4		Ø 9.5	
	Gas	mm		Ø 12.7		Ø 15.9	
	Drain	O.D.Ø21 (PVC21)					
Machine Weight	kg	21		25		31	
Max. Fuse Amps	MFA	A		16		A	
Min. Circuit Amps	MCA	0.3		0.6		A	



Floor Standing Type



Model		FXNP22MLVC	FXNP28MLVC	FXNP36MLVC	FXNP45MLVC	FXNP56MLVC	FXNP71MLVC
Power Supply		1 - Phase 220V, 50Hz					
Rated Cooling Capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
Rated Heating Capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0
Rated Power Consumption	Cooling	49		90		110	
	Heating	49		90		110	
Dimension (H x W x D)	mm	660 x 1000 x 222		600 x 1140 x 222		600 x 1420 x 222	
Airflow Rate	m ³ /min	6.8/5.8		8.0/6.0		10.1/8.0	
Sound Level	dB(A)	36/33		36/32		38/33	
Piping Connections	Liquid	mm		Ø 6.4		Ø 9.5	
	Gas	mm		Ø 12.7		Ø 15.9	
	Drain	O.D.Ø21 (PVC21)					
Machine Weight	kg	25		30		36	
Max. Fuse Amps	MFA	A		16		A	
Min. Circuit Amps	MCA	0.3		0.6		A	



Wall Mounted Type



Model		FXAP22NVC	FXAP28NVC	FXAP36NVC
Power Supply		1 - Phase 220V, 50Hz		
Rated Cooling Capacity	kW	2.2	2.8	3.6
Rated Heating Capacity	kW	2.5	3.2	4.0
Rated Power Consumption	Cooling	19		30
	Heating	29		35
Dimension (H x W x D)	mm	290 x 795 x 238		
Airflow Rate	m ³ /min	7.5/4.5		8.5/5.5
Sound Level	dB(A)	35/31		38/31
Piping Connections	Liquid	mm		
	Gas	mm		
	Drain	mm		
Machine Weight	kg	11		
Max. Fuse Amps	MFA	A		
Min. Circuit Amps	MCA	0.3		0.4






Indoor Unit Lineup

Outdoor Unit

Piping Joint								
Number	Name of Option		Model	Model	Model	Model	Model	
			RUXYQ8BA RUXYQ10BA	RUXYQ12BA RUXYQ14BA RUXYQ16BA RUXYQ18BA RUXYQ20BA RUXYQ22BA	RUXYQ24BA RUXYQ26BA RUXYQ28BA RUXYQ30BA RUXYQ32BA RUXYQ34BA	RUXYQ36BA RUXYQ38BA RUXYQ40BA RUXYQ42BA RUXYQ44BA	RUXYQ46BA RUXYQ48BA RUXYQ50BA RUXYQ52BA RUXYQ54BA RUXYQ56BA	RUXYQ58BA RUXYQ60BA RUXYQ62BA RUXYQ64BA RUXYQ66BA
1	Distributive Piping	REFNET joint	KHRP26NC22T KHRP26NC33T	KHRP26NC22T KHRP26NC33T KHRP26NC72T	KHRP26NC22T KHRP26NC33T	KHRP26NC72T KHRP26NC73T	KHRP26NC22T KHRP26NC33T	KHRP26NC72T KHRP26NC73T KHRP26NC74T*
		Pipe Size Reducer		-	KHRP26MC73P			
2	Outdoor unit multi connection piping kit			-	BHFP22MC90		BHFP22MC135	

* When the diameter of the main gas pipe from outdoor unit to the first REFNET joint is 44.5, use the captioned model. For details please contact Daikin professional engineers.

Indoor Unit

Air Outlet				
Number	Name of Option		Model	Function
1	Air Outlet		K-HV8AWC (Optional:FXDP22~45)	<ul style="list-style-type: none"> Air outlet dimensions match Daikin indoor unit designs, guarantee effective airflows Outlets are not easy to frost by using ABS thermal material Better air distribution Black and white panels harmonized with your interior design Adjustable horizontal louvers Compliant with the RoHS directive
2			K-HV10AWC (Optional:FXDP50~56)	
3			K-HV13AWC (Optional:FXDP63~71)	

New Indoor and Outdoor Units

The capacity of outdoor units in increments of 2 HP, up to 66HP

- Simplified design process and enhanced system flexibility of outdoor unit's single module with only 2 shapes and sizes.
- The capacity of outdoor units in 2 HP increments can meet the needs of customers precisely.

Model	RUXYQ8BA	RUXYQ10BA	RUXYQ12BA	RUXYQ14BA	RUXYQ16BA	RUXYQ18BA	RUXYQ20BA	RUXYQ22BA
-------	----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------

Model	RUXYQ24BA	RUXYQ26BA	RUXYQ28BA	RUXYQ30BA	RUXYQ32BA	RUXYQ34BA	RUXYQ36BA	RUXYQ38BA	RUXYQ40BA	RUXYQ42BA	RUXYQ44BA
Combination	RUXYQ10BA	RUXYQ12BA	RUXYQ8BA	RUXYQ8BA	RUXYQ10BA	RUXYQ12BA	RUXYQ14BA	RUXYQ18BA	RUXYQ18BA	RUXYQ20BA	RUXYQ22BA
	RUXYQ14BA	RUXYQ14BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA

Model	RUXYQ46BA	RUXYQ48BA	RUXYQ50BA	RUXYQ52BA	RUXYQ54BA	RUXYQ56BA	RUXYQ58BA	RUXYQ60BA	RUXYQ62BA	RUXYQ64BA	RUXYQ66BA
Combination	RUXYQ10BA	RUXYQ12BA	RUXYQ8BA	RUXYQ10BA	RUXYQ10BA	RUXYQ12BA	RUXYQ14BA	RUXYQ20BA	RUXYQ18BA	RUXYQ20BA	RUXYQ22BA
	RUXYQ14BA	RUXYQ14BA	RUXYQ20BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA
	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA

Note: Daikin 8HP outdoor unit obtained the  certification ( certification covers air conditioning units with a cooling capacity ≤24.4KW)



Outdoor Unit



VRV






Outdoor Unit Specifications

Outdoor Unit

Outdoor Unit									
Model		RUXYQ8BA	RUXYQ10BA	RUXYQ12BA	RUXYQ14BA	RUXYQ16BA	RUXYQ18BA	RUXYQ20BA	
Horse Power	HP	8	10	12	14	16	18	20	
Combination		—	—	—	—	—	—	—	
Power Supply									
*1 Cooling Capacity	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.5	
*2 Heating Capacity	kW	25.0	31.5	37.5	45.0	50.0	56.5	63.0	
Power Consumption	Cooling	kW	4.78	6.85	8.10	10.25	12.10	13.50	15.80
	Heating	kW	5.27	6.90	8.59	10.70	12.20	13.60	15.90
Airflow Rate	m ³ /min	162	175	185	223	280	271	271	
Dimension (H x W x D)	mm	1657 x 930 x 765			1657 x 1240 x 765				
Sound Level	Front Sound Level	dB(A)	53	54	56	57	58	59	
	Surrounded Sound Level	dB(A)	56	57	59	60	61	62	
Night Quiet Mode		dB(A) 40							
Piping Connections	Liquid	mm	Ø 9.5		Ø 12.7		Ø 15.9		
	Gas	mm	Ø 19.1	Ø 22.2	Ø 25.4		Ø 28.6		
Weight	kg	189	196		250	291	300		
Refrigerant	Type								
	Charge	kg	8.4	8.6	8.7	11.1		15.6	
Operation Range	Cooling	°CDB							
	Heating	°CWB							
*4 Max. Fuse Amps	MCA	A	16.1	18.0	20.1	24.4	26.0	34.8	39.6
*4 Min Circuit Amps	MFA	A	20		25	32		40	

Outdoor Unit								
Model		RUXYQ40BA	RUXYQ42BA	RUXYQ44BA	RUXYQ46BA	RUXYQ48BA	RUXYQ50BA	
Horse Power	HP	40	42	44	46	48	50	
Combination		RUXYQ18BA RUXYQ22BA	RUXYQ20BA RUXYQ22BA	RUXYQ22BA RUXYQ22BA	RUXYQ10BA RUXYQ14BA RUXYQ22BA	RUXYQ12BA RUXYQ14BA RUXYQ22BA	RUXYQ8BA RUXYQ20BA RUXYQ22BA	
Power Supply								
*1 Cooling Capacity	kW	111.9	118.0	123.0	129.5	135.0	140.4	
*2 Heating Capacity	kW	125.5	132.0	138.0	145.5	151.5	157.0	
Power Consumption	Cooling	kW	31.80	34.10	36.60	35.40	36.65	38.88
	Heating	kW	32.00	34.30	36.80	36.00	37.69	39.57
Airflow Rate	m ³ /min	271+271	271+271	271+271	175+223+271	185+223+271	162+271+271	
Dimension (H x W x D)	mm	1657 x 1240 x 765+1657 x 1240 x 765						
Sound Level	Front Sound Level	dB(A)	62	63		62	63	
	Surrounded Sound Level	dB(A)	65	66		65	66	
Night Quiet Mode		dB(A) 43						
Piping Connections	Liquid	mm						
	Gas	mm	Ø 38.1					
Weight	kg	600			746		789	
Refrigerant	Type							
	Charge	kg	15.6+15.6		8.6+11.1+15.6	8.7+11.1+15.6	8.4+15.6+15.6	
Operation Range	Cooling	°CDB						
	Heating	°CWB						
*4 Max. Fuse Amps	MCA	A	78.4	83.2	87.2	85.7	87.6	89.7
*4 Min Circuit Amps	MFA	A	100					





*1 Indoor Temperature of 27°CDB, 19°CWB; Outdoor Temperature of 35°CDB

*2 Indoor Temperature of 20°CDB; Outdoor Temperature of 7°CDB, 6°CWB.

*3 Sound Level: The operation sound levels are conversion values in anechoic chamber. In practice, sound levels tend to be higher than the specified values due to ambient noise or reflection. Front sound level measured at a point 1m in front of the unit. Surrounded sound level measured at 4 points (front, rear, left and right) of 1m in front of the unit.

*4 MFA is used to select the circuit breaker and the ground fault circuit interrupter (earth leakage circuit breaker). MCA is used to select wire size.



										
	RUXYQ22BA	RUXYQ24BA	RUXYQ26BA	RUXYQ28BA	RUXYQ30BA	RUXYQ32BA	RUXYQ34BA	RUXYQ36BA	RUXYQ38BA	
	22	24	26	28	30	32	34	36	38	
	—	RUXYQ10BA RUXYQ14BA	RUXYQ12BA RUXYQ14BA	RUXYQ8BA RUXYQ20BA	RUXYQ8BA RUXYQ22BA	RUXYQ10BA RUXYQ22BA	RUXYQ12BA RUXYQ22BA	RUXYQ14BA RUXYQ22BA	RUXYQ18BA RUXYQ20BA	
3 - Phase 50Hz 380V										
	61.5	68.0	73.5	78.9	83.9	89.5	95.0	101.5	106.9	
	69.0	76.5	82.5	88.0	94.0	100.5	106.5	114.0	119.5	
	18.30	17.10	18.35	20.58	23.08	25.15	26.40	28.55	29.30	
	18.40	17.60	19.29	21.17	23.67	25.30	26.99	29.10	29.5	
	271	175+223	185+223	162+271	162+271	175+271	185+271	223+271	271+271	
	1657 x 930 x 765+1657 x 1240 x 765							1657 x 1240 x 765+1657 x 1240 x 765		
	60	58	59	60	61		62			
	63	61	62	63	64		65			
	43									
	Ø 19.1									
	Ø 31.8									
	Ø 38.1									
	446			489			496		550	600
	R410A									
	8.6+11.1		8.7+11.1		8.4+15.6		8.6+15.6	8.7+15.6	11.1+15.6	15.6+15.6
	-5~50°CDB									
	-23~15.5°CWB									
	43.6	40.2	44.0	46.1	59.7	61.6	63.7	68.0	69.6	
	50			63		80				
										
	RUXYQ52BA	RUXYQ54BA	RUXYQ56BA	RUXYQ58BA	RUXYQ60BA	RUXYQ62BA	RUXYQ64BA	RUXYQ66BA		
	52	54	56	58	60	62	64	66		
	RUXYQ10BA RUXYQ20BA RUXYQ22BA	RUXYQ10BA RUXYQ22BA RUXYQ22BA	RUXYQ12BA RUXYQ22BA RUXYQ22BA	RUXYQ14BA RUXYQ22BA RUXYQ22BA	RUXYQ20BA RUXYQ20BA RUXYQ20BA	RUXYQ18BA RUXYQ22BA RUXYQ22BA	RUXYQ20BA RUXYQ22BA RUXYQ22BA	RUXYQ22BA RUXYQ22BA RUXYQ22BA		
3 - Phase 50Hz 380V										
	146.0	151.0	156.5	163.0	169.5	173.4	179.5	184.5		
	163.5	169.5	175.5	183.0	189.0	194.5	201.0	207.0		
	40.95	43.45	44.70	46.85	47.40	50.10	52.40	54.90		
	41.20	43.70	45.39	47.50	47.70	50.40	52.70	55.20		
	175+271+271	175+271+271	185+271+271	223+271+271	271+271+271	271+271+271	271+271+271	271+271+271		
	1657 x 930 x 765+1657 x 1240 x 765+1657 x 1240 x 765				1657 x 1240 x 765+1657 x 1240 x 765+1657 x 1240 x 765					
	64									
	67									
	45									
	Ø 19.1									
	Ø 41.3									
	796			850			900			
	R410A									
	8.6+15.6+15.6		8.7+15.6+15.6		11.1+15.6+15.6		15.6+15.6+15.6			
	-5~50°CDB									
	-23~15.5°CWB									
	101.2	105.2	107.3	111.6	113.2	122.0	126.8	130.8		
	125			140			160			


Remarks

1. System Connection Ratio: 50%~130%
2. When the system is connecting to Ceiling Mounted Duct (Large Capacity) Type and Fresh Air Processing Unit at the same time, the total capacity of indoor units should be smaller or equal to 115% of the total capacity of outdoor unit.

Control Systems

Integrated Building Monitoring System

The high speed transmission of DIII-NET enables more advanced control of the VRV system, providing you with enhanced comfort.

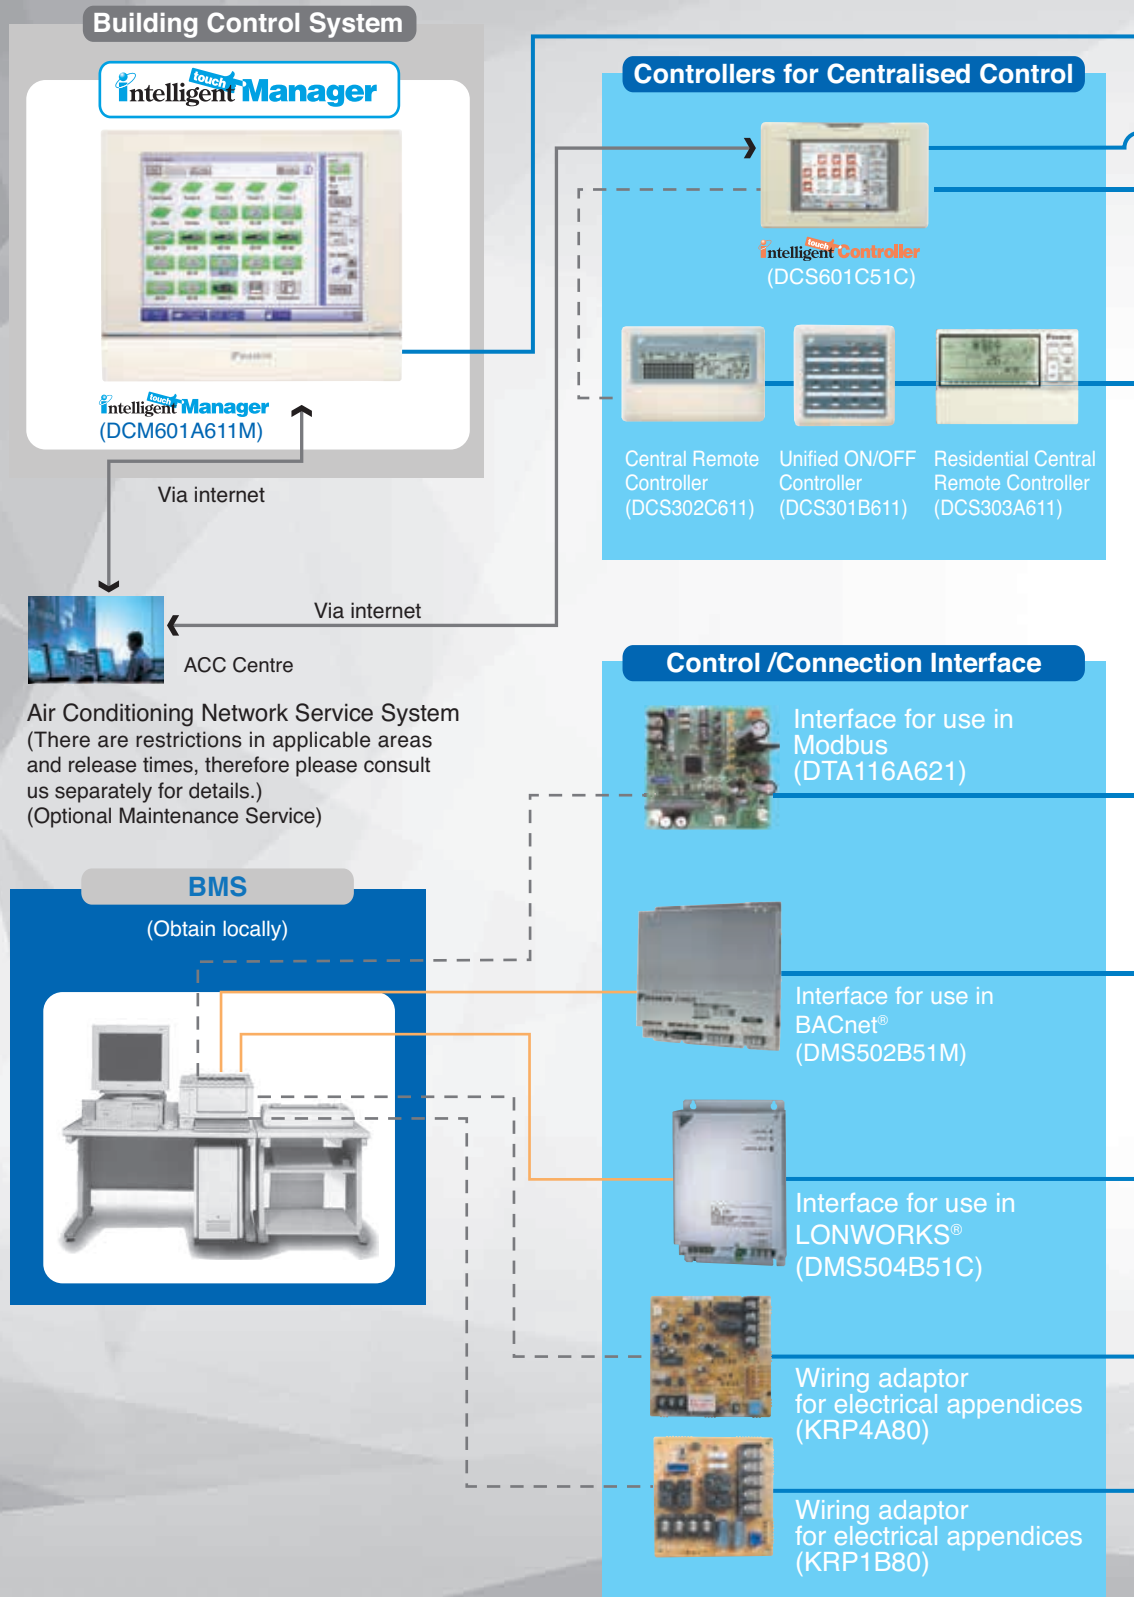

The DIII-NET system provides for:

- Close control and monitoring by integrating a wide variety of air-conditioners in the entire building.
- Saving the in-building cabling using non-polar, two-wire cables. Easier wiring work with tremendously fewer wiring errors.
- Additional setups readily up and running. An extendable cabling up to 2 km in total.
- Different control equipment flexibly joined in the system for hierarchical risk diversification.
- Daikin's total heat exchangers and other devices under integral control.

Long Distance Control System



DS-AIR Adaptor (DTA117B611)

DIII-NET
(High Speed Multiple Transmission)

DIII-NET, Daikin is unique high speed multiple transmission system, links air conditioners and various other building equipment-in accordance with applications, scale and conditions and transmits vast amounts of information between them.

VRV



Individual Control



BRC1F611




BRC1E631



BRC1C611

Heat Reclaim Ventilator



VRV



Caution:

Limitation may apply to some models and functions. Please contact your local sales office for details. Consultation is necessary before employing this control system. Please contact your local sales office before making a purchase.

Note: BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). LONWORKS® is a trademark of Echelon Corporation registered in the United States and other countries.

- DIII-NET Line
- BACnet®/Ethernet or LONWORKS® Network Communication Line
- - - Contact Signal Line
- Individual Control Line

Control Systems

Individual Control Systems for VRV Indoor Units Wired Remote Controller

Type F wired remote controller

Backlit display

Full Functions, Large backlight display and user-friendly design



White
BRC1F611

- Basic function control
- Backlight display
- 3D airflow control
- Individual blind direction setting
- Intelligent sensor setting
- Automatic temperature recovery



Silver
BRC1F611S

- Maximum and minimum temperature setting
- Automatic OFF time setting
- Clock (time display)
- Language setting (Chinese/ English)
- Child lock
- Timer setting (max. 96 hours)



Gold
BRC1F611N

- Weekly schedule setting
- Detailed indoor and outdoor temperature display according to the model
- Interlock with HRV
- Supports airflow rate control when connected to HRV
- Available in three colors

*Remote display language setting is available for Simplified Chinese/ English. Language on buttons is Simplified Chinese only.

Type E wired remote controller

Easy control, colorful crystal panel and flexible selection



White
BRC1E631

- Basic function control
- 3D airflow control
- Intelligent sensor setting*
- Maximum and minimum temperature setting*
- Child lock



Silver
BRC1E631S



Pink
BRC1E631P

- Timer setting (max. 12 hours)
- Interlock with HRV
- Supports airflow rate control when connected to HRV
- Available in five colors



Red
BRC1E631R



Gold
BRC1E631N

*This function has to be set on-site. For details, please consult professional Daikin engineers.

*Type E wired remote controller language is Simplified Chinese only.

Type C wired remote controller

Classic design, convenient control and easy setting



BRC1C611

- Basic function control
- Timer setting (max. 72 hours)
- Interlock with HRV
- Supports airflow rate control when connected to HRV

Notes:

1. Basic function control includes the ON/OFF function, operating mode setting, airflow rate control, address setting, centralized control setting and test run setting.
2. Intelligent sensor setting supports different modes, such as avoiding direct airflow, direct airflow and energy-saving mode when the space is unoccupied.
3. Wind direction control and intelligent sensor setting are available on selected indoor units only.

Control Systems

Wireless Remote Controllers



BRC7F634F1
(White panel) **BRC7F634K1**
(Black panel)

Applicable model: Ceiling mounted cassette (round flow) type

- Basic function control
- Three wind speed levels
- Wind direction control (up and down)
- Timer setting (max. 72 hours)
- Filter cleaning alert



BRC4C651

Applicable models:
ceiling mounted duct (large capacity) type
Ceiling mounted built-in type
Ceiling mounted duct type

- Basic function control
- Three wind speed levels
- Timer setting (max. 72 hours)
- Filter cleaning alert



BRC4L631
(Backlight)

Applicable model:
Slim ceiling mounted duct (compact) type

- Basic function control
- Five wind speed levels
- Display contrast and lightness adjustment
- Timer setting (max. 72 hours)
- Filter cleaning alert



BRC7L611
(Backlight)

Applicable model:
Ceiling mounted cassette (round flow with sensing) type

- Basic function control
- Five wind speed levels
- Wind direction control (up and down)
- Individual blind direction setting
- Display contrast and lightness adjustment
- Timer setting (max. 72 hours)
- Intelligent sensor setting
- Filter cleaning alert



BRC4L611
(Backlight)

Applicable model:
Ceiling mounted duct (3D airflow with sensing) type

- Basic function control
- Five wind speed levels
- Wind direction control (up, down, left, right)
- Wind direction change (up, down, left, right)
- Display contrast and lightness adjustment
- Timer setting (max. 72 hours)
- Intelligent sensor setting
- Filter cleaning alert



BRC4L621
(Backlight)

Applicable model:
Ceiling mounted duct (3D airflow) type

- Basic function control
- Five wind speed levels
- Wind direction control (up, down, left, right)
- Wind direction change (up, down, left, right)
- Display contrast and lightness adjustment
- Timer setting (max. 72 hours)
- Filter cleaning alert



BRC7L661
(Backlight)

Applicable model:
Ceiling mounted cassette corner type

- Basic function control
- Five wind speed levels
- Wind direction control (up, down, left, right)
- Wind direction change (Up, down, left, right)
- Display contrast and lightness adjustment
- Timer setting (max. 72 hours)
- Filter cleaning alert



BRC4C623

Applicable models:
Concealed floor standing type
Floor standing type

- Basic function control
- Two wind speed levels
- Timer setting (max. 72 hours)
- Filter cleaning alert



BRC7E718W

Applicable model:
Wall mounted typ

- Basic function control
- Three wind speed levels
- Wind direction control (up, down)
- Timer setting (max. 72 hours)
- Filter cleaning alert

Notes:

1. Basic function control includes the ON/OFF function, operating mode setting, airflow rate control, address setting, centralized control setting and test run setting.
2. Intelligent sensor setting supports different modes, such as avoiding direct airflow, direct airflow and energy-saving mode when the space is unoccupied.
3. Wind direction control and intelligent sensor setting are available on selected indoor units only.

Advanced Control System for VRV Indoor Units

DS-AIR Long Distance Control System

The system can link up to 64 indoor units for convenient remote control

DS-AIR Adaptor




DTA117B611

- Link up to 64 indoor units and 10 outdoor units
- Remote control by up to 4 nos. smart mobile devices
- Full-function mode settings
- Link up to 16 HRVs with ON/OFF function
- One-touch scenario setting
- Timer
- Malfunction alarm (air conditioner only)
- Dedicated application can be downloaded using iPhone/Android smartphones to set IP address easily

Notes:

1. "iPad" and "iPhone" are registered trademarks of Apple Inc. The use of such trademarks has been authorized by Apple Inc.
2. Android™ is a trademark of Google Inc.

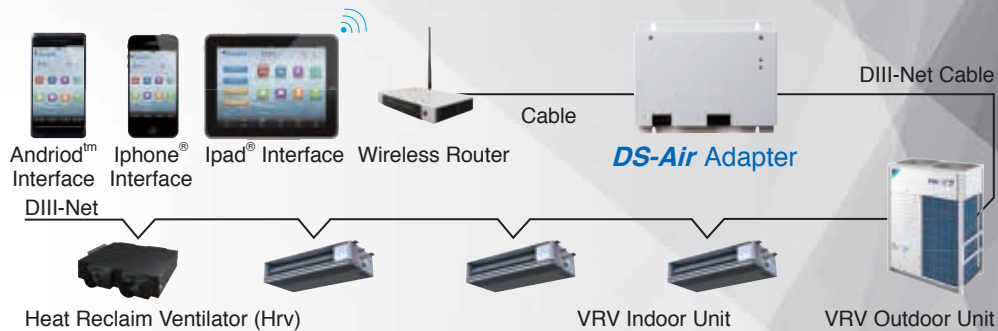

Unified ON/OFF Controller (Option)



DCS301B611

Max. 16 groups of indoor units can be operated simultaneously / individually.

- Max. 16 groups (128 indoor units) controllable
- 2 remote controllers can be used to control from 2 different places
- Operating status indication (Normal operation, Alarm)
- Centralised control indication
- Max. wiring length 1,000 m (Total: 2,000 m)
- Compact size casing (Thickness: 16 mm)
- Connectable with Central Remote Controller and BMS system

Central Remote Controller (Option)



DCS302C611

Max. 64 groups (zones) of indoor units can be controlled individually same as LCD Remote Controller.

- Max. 64 groups (128 indoor units) controllable
- Max. 128 groups (128 indoor units) are controllable by using 2 central remote controllers, which can control from 2 different places
- Zone control
- Malfunction code display
- Max. wiring length 1,000 m (Total: 2,000 m)
- Connectable with Unified ON/OFF Controller and BMS system
- Airflow volume and direction can be controlled individually for indoor units in each group operation
- Ventilation volume and mode can be controlled for Heat Reclaim Ventilator

Residential Central Remote Controller* (Option)



DCS303A611

Max. 16 groups of indoor units can be easily controlled with the large LCD panel.


- Max. 16 groups (128 indoor units) controllable
- Backlight and large LCD panel for easy readability
- ON/OFF, temperature settings and scheduling can be controlled individually for indoor units
- All indoor units can be turned ON or OFF at once with "ALL" button
- Each group has a dedicated button for convenience
- Outside temperature display

* Cannot be used with other centralised control equipment

Advanced Control System for VRV Indoor Units



Communication functions in the user-friendly icon-based multilingual controller simplify centralised control of the VRV system.

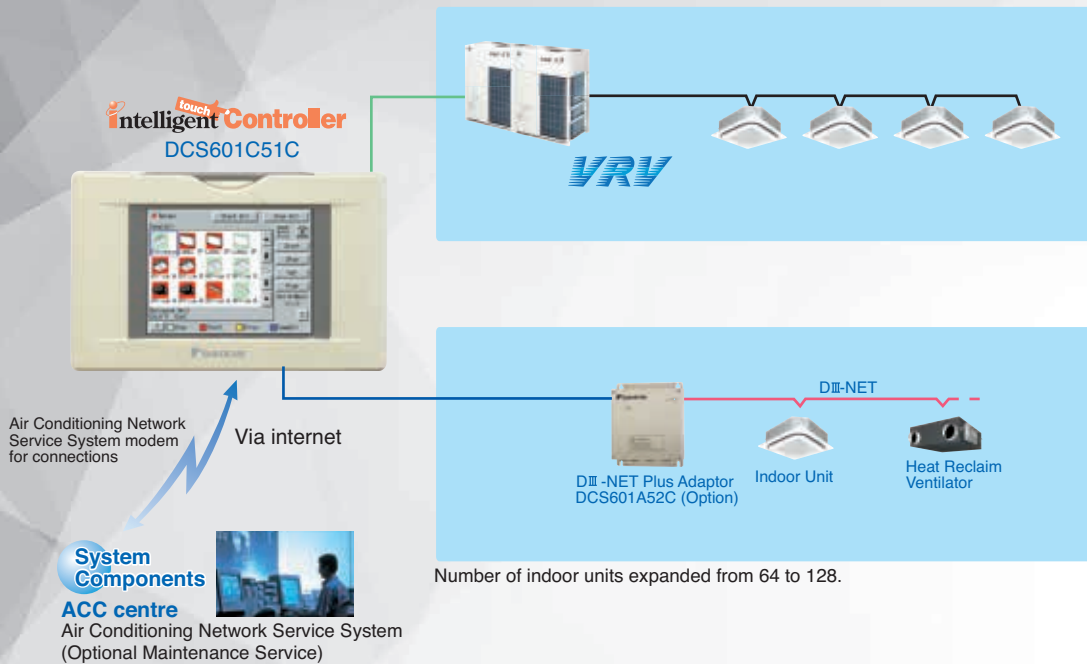

Features

- Colour LCD touch panel icon display
- Small manageable size
- Simplified engineering
- Yearly schedule
- Auto heat/cool change-over
- Temperature limitation
- Enhanced history function
- Simple Interlock Function
- Multi language (English, French, Italian, German, Spanish and Chinese)
- Built-in modem for connecting to Air Conditioning Network Service System (Option)
- Doubling of number of connectable indoor units by adding a DIII-NET Plus Adaptor (Option)



Advanced Control System for VRV Indoor Units




One touch selection to total air comfort



Daikin proudly introduces its intelligent Touch Manager, a VRV system controller featuring an array of simple, useful system management functions for added value.

Up to 512 groups can be controlled by one system

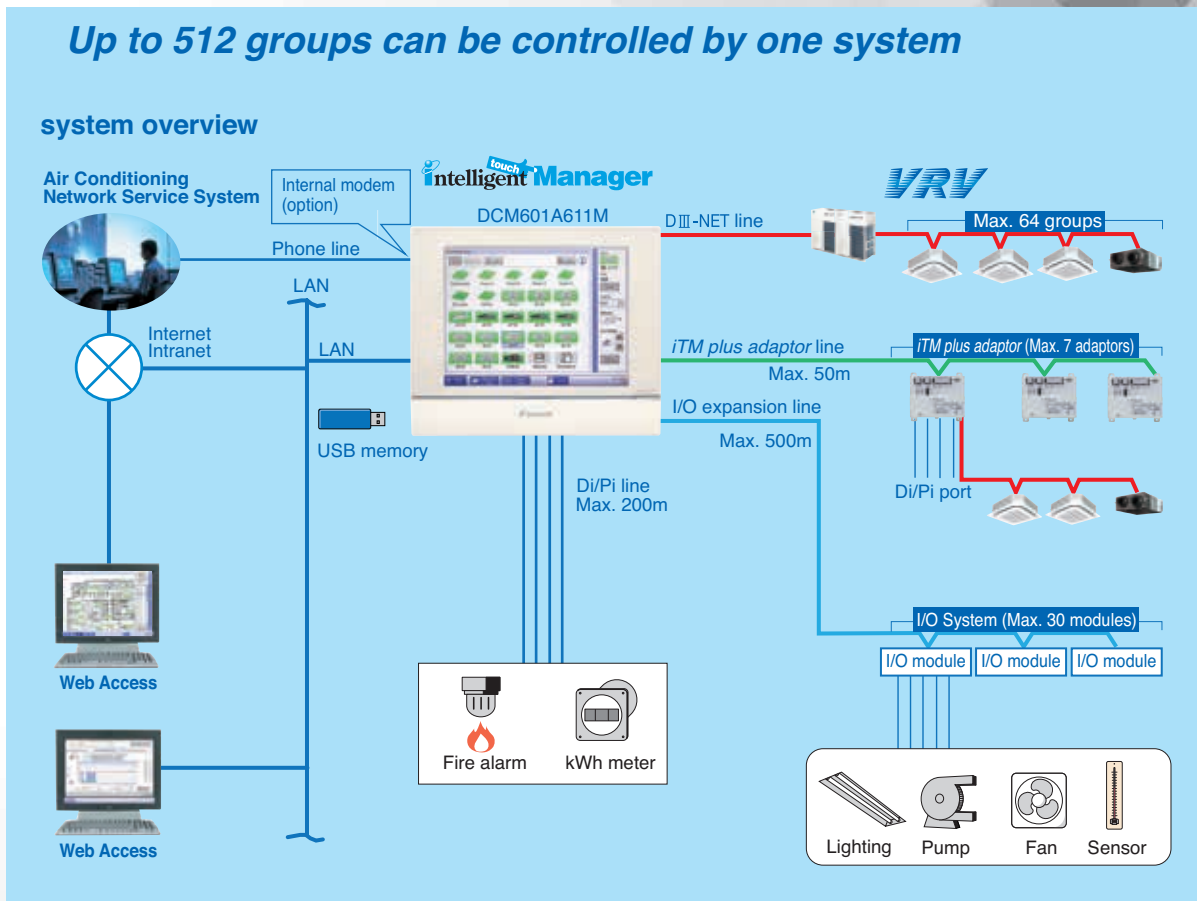

Features

Central control



- Handy area settings simplify detailed management of VRV system.
- Display of floor plans enables a quick search of desired air conditioning units.
- Operation history shows manner of control and origin in past operations of air conditioning units.

Remote access

- Remote access with a PC allows total air conditioning management using the same type of screens as those displayed in the intelligent Touch Manager.
- Authorised users can centrally control individual air conditioning units from their own computers.

Automatic control

- VRV systems are controlled automatically throughout the year by the schedule function.
- Interlocking VRV system and other equipment enables easy automation of building facilities operation.
- Setback adjusts temperature settings even when rooms are unoccupied.

Energy management



- The Energy Navigator feature simplifies energy management by tracking energy consumption data and identifying inefficient operation.

Troubleshooting

- Contact information of maintenance contractors can be registered and displayed.
- E-mails are sent automatically to alert of malfunctions and potential trouble.
- The intelligent Touch Manager can link to the Air Conditioning Network Service System for 24-hour monitoring of operating conditions and status.

Scalability

- A single intelligent Touch Manager can manage a small building or be expanded to handle medium- to large-sized buildings.

Advanced Control System for VRV Indoor Units

Advanced Control Systems *Intelligent Manager III*

Advanced control system that recognises the trend of powerful control systems. Connectable up to a maximum of 1024 indoor units group on one i-Manager.



DAM602B51M

Centralised Management Function

- Floor visual navigation
- Individual or centralized control system (ON/OFF, temperature setting and mode change)
- Operation mode monitoring
- Schedule timer (week/month/year)
- Power proportional distribution
- User login
- Temperature limitation
- Auto heat / cool changeover
- Malfunction alarm
- Operation history display
- Interlock control (fire alarm, door lock and malfunction)
- Management of facilities/equipment other than A/C units (By adding Dio unit)
- Compatibility with BACnet
- Compatibility with latest Vista system

Econo Mode (Energy Saving Mode) (Option)

- Indoor units alternative stop control
- Outdoor units capacity control


Model = DAM003A51M

Web Access Function (Option)

i-Manager system allows easy management of systems in remote facilities via the Internet using a web browser

- Centralised control air conditioning system for the multiple buildings from one location
- Centralised control air conditioning system for a building in remote location
- Tenants can centralized control and monitor air conditioning system

Model = DAM004A51M

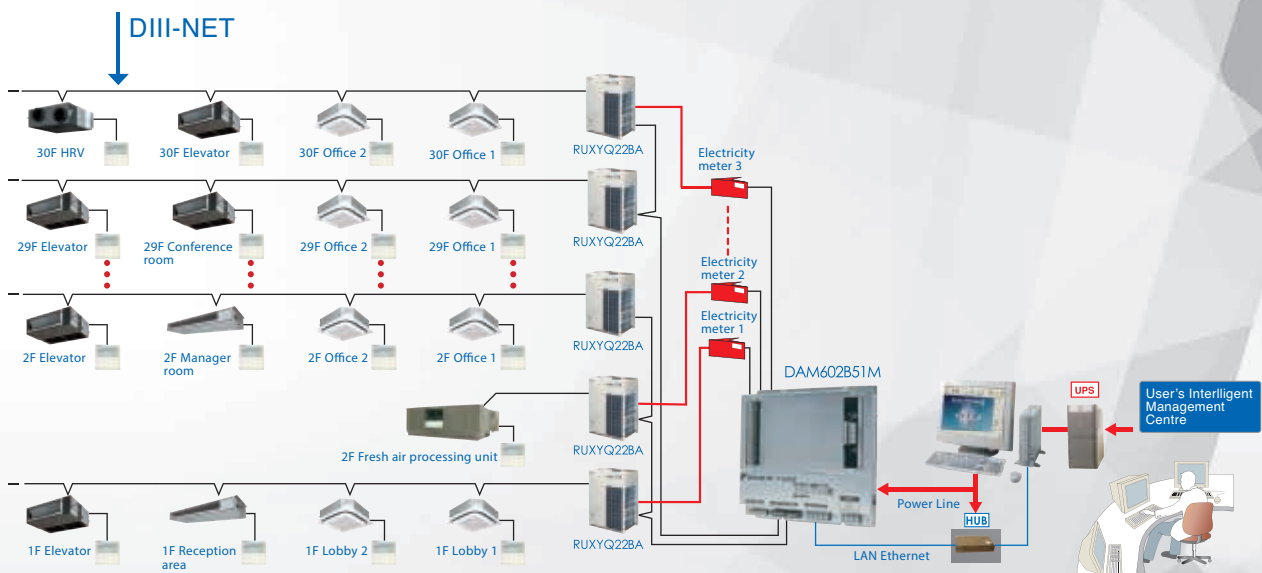

Advanced Control System for VRV Indoor Units

Advanced Control Systems - Compatibility with BMS and Facilitating the Control System



DMS504B51C

Interface for use in LONWORKS®

- Maximum connectable up to 10 outdoor units and 64 indoor units group
- One LONWORKS® unit can be expanded the number of control points, up to 300 control points. One function equivalents to one control point
- Control and monitor A/C units ON/OFF and operation mode status
- Monitor indoor unit malfunction (code display)
- Control and monitor temperature setting for indoor unit
- Monitor and replace filter in use (cleaning signal)
- Control and monitor operation mode
- Remote controller setting (ON/OFF, operation mode and temperature)
- Control and monitor airflow direction and rate
- Schedule timer
- Interlock control (fire alarm, door lock and malfunction, etc)
- Forced OFF setting, etc

Note 1: For example, one user controls and monitors air conditioning system ON/OFF setting, operation mode setting, temperature setting and mode change, total of 5 functions, i.e. 300/5=60, LONWORKS® maximum connect up to 60 indoor units group.

Note 2: System controlled via PC software. Software to be supplied by third party




DMS502B51M

Interface for use in BACnet®

- Maximum connectable up to 20 outdoor units and 128 indoor units group
- By adding BACnet® expansion kit (DAM411B51M), BACnet® connectable machine can be expanded to 40 outdoor units and 256 indoor units group
- Control and monitor A/C units ON/OFF and operation mode status
- Malfunction error display
- Control and monitor temperature setting for outdoor units
- Monitor and replace filter in use (cleaning signal)
- Control and monitor operation mode change
- Remote controller setting (ON/OFF, operation mode and temperature)
- Control and monitor airflow direction and rate
- Schedule Timer
- Interlock control (fire alarm, door lock and malfunction, etc)
- Forced OFF setting, etc

Note 1: Compatibility with i-Manager, in this case, BACnet® System only monitors, i-Manager System controls, the air conditioning system.

Note 2: System controlled via PC software. Software to be supplied by third party



DTA116A621


MODBUS Adapter

- Links up to 64 indoor units and 10 outdoor units
- ON/OFF function allows temperature setting and airflow control
- Operating mode setting
- Filter signal reset function
- Abnormality sensor


Note1: Control via third-party PC software.

Note2: Please consult Daikin engineers for connection options.


Note3: Applicable functions varies with models. Please consult Daikin engineers for details.

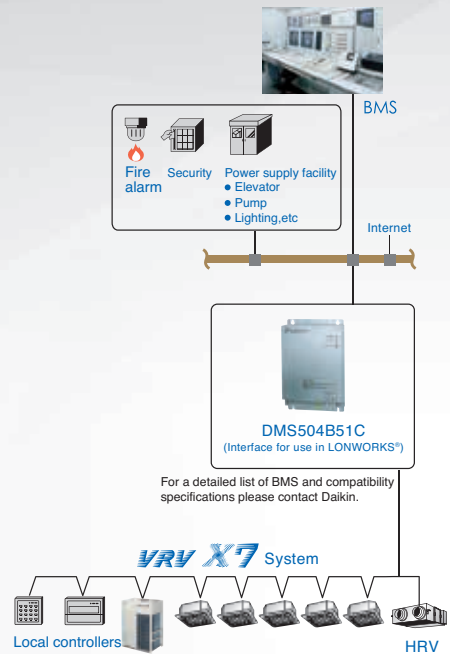

For a detailed list of BMS and compatibility specifications please contact Daikin.

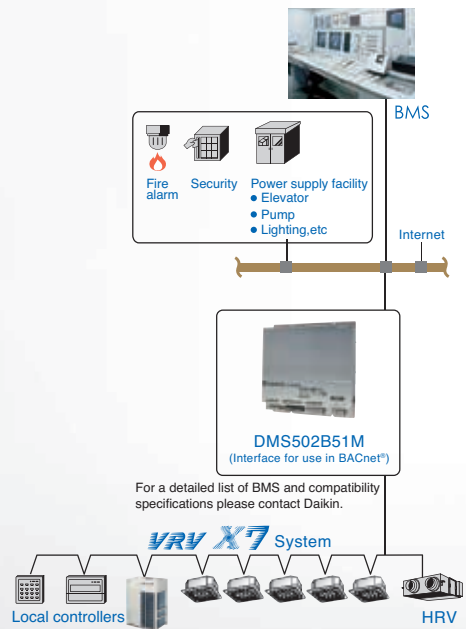

For a detailed list of BMS and compatibility specifications please contact Daikin.

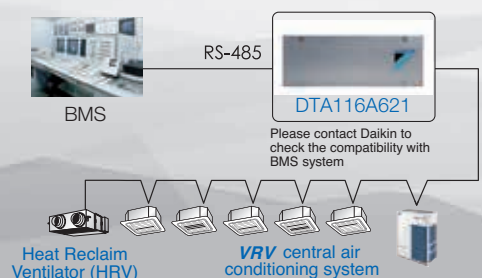

Please contact Daikin to check the compatibility with BMS system

Air Purifying Products

In a densely populated modern city, people are not just seeking a comfortable indoor temperature. They also want clean and fresh indoor air to help them stay focused and relaxed at work. However, the frequent smog spells have led to deteriorating air quality.




* Increasing levels of these pollutants and particles have led to a more complicated air composition in urban areas.

VRV Fresh Air Processing Unit

With an airflow rate from 1080-6000m³/h, the **VRV** fresh air processing unit shares the high quality of **VRV** air conditioning system and meets the need of fresh air in different spaces. It can also work with Daikin's fresh air filter accessories to create a green environment for city-dwellers to reconnect to nature.

- The direct expansion technology quickly and accurately heats up or cools down fresh air from the outdoor to near room temperature.
- To address the threat of frequent smog spells, the **VRV** fresh air processing unit can work with Daikin's fresh air filter accessories to filter harmful substances like PM2.5, SO₂ and NO₂ before directing the air indoors, creating a healthy indoor environment.
- The DC inverter technology and new refrigerant R410A help save energy.
- Integrated control of the **VRV** air conditioning system and fresh air processing unit via Daikin's smart management system.
- Easy system implementation and coordinated CO₂ level control via intelligent touch Manager, intelligent Manager III and intelligent touch Controller.

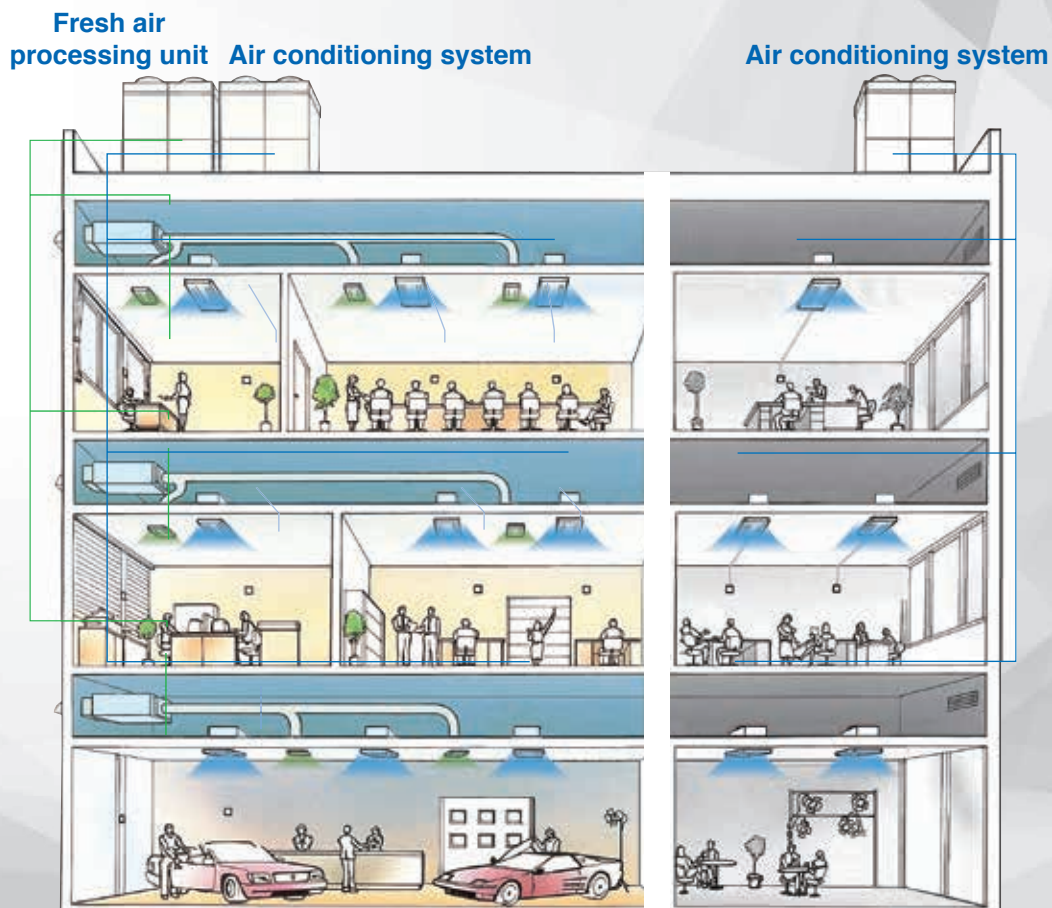

Air Purifying Products

Fresh Air Processing Unit: Air Conditioning and Fresh Air Treatment Through a Single System

- Indoor air conditioning unit and fresh air processing unit can be connected to the same outdoor unit to lower system cost
- Indoor air conditioning unit and fresh air processing unit can be connected to the same outdoor unit to minimize outdoor installation space



FXMFP140AB
FXMFP224AB
FXMFP280AB



Type E wired remote controller
BRC1E631 (option)




Type C wired remote controller
BRC1C611 (option)

	Air conditioning system capacity	Fresh air filter accessory	Outdoor unit footprint (m ²)	Illustration
Individual connection	24HP	8HP	2.16	
Mixed connection	32HP		1.68	

Connection Requirements



- The total connected capacity of a VRV fresh air processing unit and indoor air conditioning unit must be within 50%-100% of the capacity of the outdoor unit, in which the capacity of the connected VRV fresh air processing unit must not exceed 30% of the capacity of the outdoor unit.
- VRV fresh air processing unit can be used individually, and the total capacity of the connected VRV fresh air processing unit must be between 50% and 100% of the capacity of the outdoor unit.
- Fresh air processing unit can be connected to the VRV X7 series outdoor unit. Please consult Daikin engineers for other connection options of the outdoor unit.

Connection Example



Requirement 1: The total capacity of the connected VRV fresh air processing unit and indoor units should not exceed 100% of the capacity of outdoor unit. In this example, the total system capacity is 20HP, and the total capacity of the indoor units & fresh air processing unit is 20HP, so the requirement is met.

Requirement 2: The capacity of the VRV fresh air processing unit should not exceed 30%. In this example, i.e. 20HP*0.3=6HP, higher than the 5HP capacity of the VRV fresh air processing unit, so the requirement is met.

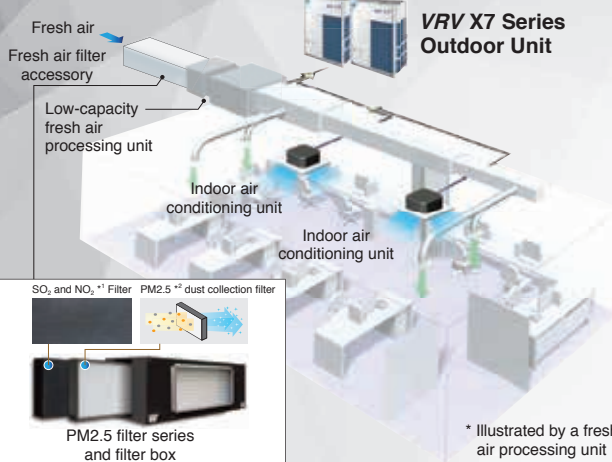

- *1 Internal test results, based on lab temperature of 22-25°CDB, humidity of 35-40%RH and airflow rate of 0.2m/s.
- *2 Daikin PM2.5 filter received the highest grade under the GB/T14295-2008 standard for air filters.

Fresh Air Processing Unit Specifications

Model	FXMFP140AB		FXMFP224AB		FXMFP280AB	
Power Supply	1 - Phase 220V, 50Hz					
Rated Cooling Capacity	kW		22.4		28.0	
Rated Heating Capacity	kW		13.9		17.4	
Rated Power Consumption	Cooling	W	548		590	
	Heating	W	548		590	
Dimension (H x W x D)	mm		470 x 744 x 1100		470 x 1380 x 1100	
Outlet Size	(H x W) mm		330 x 600		330 x 1200	
Airflow Rate	m ³ /h		1080		2100	
External Static Pressure	Pa		185		205	
Sound Level	dB(A)		42		47	
Piping Connections	Liquid	mm	Ø 9.5		Ø 9.5	
	Gas	mm	Ø 15.9		Ø 19.1	
	Drain		PS1B (Internal Thread)		Ø 22.2	
Weight	kg		86		123	
Max. Fuse Amps	MFA	A	15		15	
Min. Circuit Amps	MCA	A	1.9		3.3	

- Notes: 1. Cooling capacity is based on outdoor temperatures of 33°CDB and 28.0°CWB.
- 2. Heating capacity is based on outdoor temperatures of 0°CDB and -2.9°CWB.
- 3. Default cooling temperature is 18°C and default heating temperature is 25°C.
- 4. Operation range is -5-43°CDB.
- 5. When installing the PS1B condensation drainage pipe onsite, the PVC32 (outer diameter) and DN25 pipes or above are recommended.

Fresh Air Filter Accessories Specifications

Fresh air filter accessory model	PM2.5 filter series	BAF429A20A	BAF429A40A	BAF429A60A
	Pure filter series	BAF429A20AC	BAF429A40AC	BAF429A60AC
Applicable models	FXMFP140/224/280AB			
Airflow rate	m ³ /h	2100	4000	6000
Dimension (H x W x D)	mm	470 x 971 x 370	647 x 1323 x 370	647 x 1981 x 370
PM2.5 filter	Filter model	BAF424A20A		BAF424A60A
	Dimension (H x W x D)	mm		448 x 964 x 74
	Number of filter	1		2
	Initial pressure drop / final pressure drop	Pa		Below 40/100
	Service life ¹⁾ (dust concentration=0.1mg/m ³) ²⁾			1 Year
SO ₂ and NO ₂ filter ³⁾	Filter model	BAF424A20AC		BAF424A60AC
	Dimension (H x W x D)	mm		448 x 964 x 34
	Number of filters	1		2
	Pressure drop	Pa		Below 10
	Service life ¹⁾			1 Year

- Notes: 1. 10hr/day x 21days x 12months ≈ 2500hr.
- 2. Ambient Air Quality Standard in GB Standards GB3095-1996 (Grade 2).
- 3. SO₂ and NO₂ filter is only applicable to pure filter series products with a model number ending with C.
- 4. To maintain the effectiveness of Daikin's fresh air filter accessories, please calculate and check the static pressure with reference to the external static pressure of VRV fresh air processing unit.

Air Purifying Products

Large-Capacity Fresh Air Processing Unit



FMQ25PG15/20/30
FMQ30PG20/30/50



FMQ40PG20/30/50
FMQ50PG20/30/50
FMQ60PG20/30/50



Type E wired
remote controller
BRC1E631 (option)



Type C wired
remote controller
BRC1C611 (option)

With an ultrahigh airflow rate of up to 6,000m³/h and high external static pressure of up to 550Pa, the large-capacity fresh air processing unit meets the need of large spaces.

Large exhibition gallery



Open-plan work area



Large conference room



Large-Capacity Fresh Air Processing Unit Specifications

Model	FMQ25PG15	FMQ25PG20	FMQ25PG30	FMQ30PG20	FMQ30PG30	FMQ30PG50	FMQ40PG20
Power Supply	3 - Phase 380V, 50Hz						
Rated Cooling Capacity	28.0						45
Rated Heating Capacity	17.4						27.8
Rated Power Consumption	Cooling	400	470	660	630	810	720
	Heating	400	470	660	630	810	720
Dimension (H x W x D)	500 x 1330 x 850					665 x 1620 x 850	
Airflow Rate	2500				3000		4000
External Static Pressure	150	200	300	200	300	500	200
Sound Level	52	55	58	56	60		58
Piping Connections	Liquid	Ø 9.5					Ø 12.7
	Gas	Ø 22.2					Ø 28.6
	Drain	RP3/4 (Internal Thread)					RP1 (Internal Thread)
Weight	102					107	173
Max. Fuse Amps	MFA	15					A
Min. Circuit Amps	MCA	2.4					A
Compatible Outdoor Unit Model	RUXYQ10BA					RUXYQ16BA	

Model	FMQ40PG30	FMQ40PG50	FMQ50PG20	FMQ50PG30	FMQ50PG50	FMQ60PG20	FMQ60PG30	FMQ60PG50	
Power Supply	3 - Phase 380V, 50Hz								
Rated Cooling Capacity	45		56.0			56.0			
Rated Heating Capacity	27.8		34.8			34.8			
Rated Power Consumption	Cooling	1060	1570	840	1170	2970	1120	1440	
	Heating	1060	1570	840	1170	2970	1120	1440	
Dimension (H x W x D)	665 x 1620 x 850		665 x 1980 x 850		665 x 1620 x 850	665 x 1980 x 850			
Airflow Rate	4000		5000			6000			
External Static Pressure	300	500	200	300	500	200	300	550	
Sound Level	61		65			62	65		
Piping Connections	Liquid	Ø 12.7		Ø 15.9			Ø 15.9		
	Gas	Ø 28.6							
	Drain	RP1 (Internal Thread)							
Weight	173	179	193	199	193	197	210		
Max. Fuse Amps	MFA	15							A
Min. Circuit Amps	MCA	4.5							A
Compatible Outdoor Unit Model	RUXYQ16BA			RUXYQ20BA					


- Notes:
1. Cooling capacity is based on outdoor temperatures of 33°CDB and 28.0°CWB.
 2. Heating capacity is based on outdoor temperatures of 0°CDB and -2.9°CWB.
 3. Default cooling temperature is 18°C and default heating temperature is 22°C.
 4. Operation range is -5~43°CDB.
 5. The large-capacity fresh air processing unit can be connected to an outdoor unit in a fixed layout. An outdoor unit cannot be connected to multiple fresh air processing units at the same time.
 6. The large-capacity fresh air processing unit and other VRV indoor units cannot share the same VRV outdoor unit.
 7. When installing the condensation drainage pipe onsite:
The PVC25 (outer diameter) and DN20 pipe or above are recommended for RP3/4 condensation drainage pipe (main unit).
The PVC32 (outer diameter) and DN25 pipe or above are recommended for RP1 condensation drainage pipe (main unit).

Air Purifying Products

Heat Reclaim Ventilator

The fresh air system independent of the air conditioning unit can bring the fresh air closer to room temperature through efficient heat exchange using the heat generated from indoor ventilation, effectively lowering the air conditioning cost.

Comfortable Ventilation and Stable Room Temperature

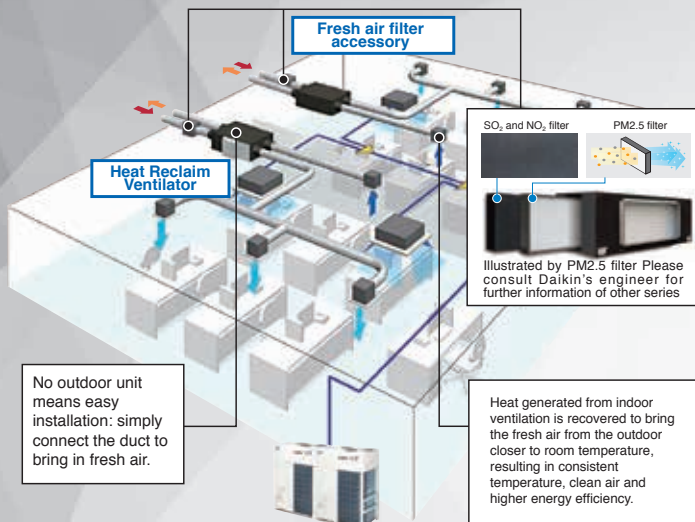


Note: The above diagram illustrates the connection of standard series (standard model) heat reclaim ventilator.

Diversified Portfolio to Meet Different Needs

- Standard series Heat Reclaim Ventilator**
Standard model: maximum airflow rate of 4000m³/h, suitable for medium or large offices and villas
Slim model: The 200mm ultra-thin unit can flexibly suit small spaces or those with inadequate ceiling space.
Low-temperature slim model: a wider temperature range with the lowest operating temperature at -25°C.
High static pressure model: the high external static pressure setting is suitable for spaces with a lower ceiling and many beams.
 - PM2.5 Purifying Series Heat Reclaim Ventilator (standard / slim / low-temperature slim / high static pressure model)**
 Highest-graded EPA*1 PM2.5 electrostatic filter ensures high air quality.
 - PM2.5 Exhaust Air Purifying Series Heat Reclaim Ventilator (standard / slim / low-temperature slim / high static pressure model)**
 Includes highly efficient EPA*1 PM2.5 filter and block SO₂ and NO₂*2 to enhance indoor air quality.
 - PM2.5 Professional Purifying Series Heat Reclaim Ventilator (high static pressure model)**
 An EPA*1 electrostatic filter with a three-layer structure
- *1 Examined by China Academy of Building Research according to GB/T14295-2008 standard for air filters.
 *2 Internal test results are based on lab temperature of 22-25°CdB, humidity of 35-40%RH and airflow rate of 0.2m/s.


Leading Heat Exchange Efficiency

Absorbent and humidifying material High Efficiency Paper (HEP) enables highly efficient heat exchange and enthalpy exchange.



Excellent Energy-Saving Performance

By combining the heat exchange, bypass and precooling and preheating control modes, the annual air conditioning load can be reduced by approximately 28%.*




* The above data are internally calculated values under different modes, including the heat exchange mode, bypass mode and precooling and preheating control mode; applicable to standard heat exchanger model.

Coordinated Control

The fresh air processing function and CO₂ level can be easily controlled at the same time via the advanced Daikin control system.

Coordinated Control of VRF units via Wired Remote Controllers

Controlling both the air conditioning unit and Heat Reclaim Ventilator with a single remote controller can significantly simplify the system operation.



Series	Type	Standard Type (VAM-GMVE)				Slim Type (VAML-GV1)			Low-Temperature Slim Type (VAML-GV1H)			High Static Pressure Type (VAMH-GV1)				Type	Standard Type (VAM-GMVE)					
		Model	150	250	350	500	100	200	300	100	200	300	150	250	350		500	Model	800	1000	1500	2000
Standard Series	Image																	Image				
	Image																	Image				
PM2.5 Purifying Series	Combo Model	IAQ 150GP	IAQ 250GP	IAQ 350GP	IAQ 500GP	IAQ 100LP	IAQ 200LP	IAQ 300LP	IAQ 100HP	IAQ 200HP	IAQ 300HP	IAQ 150GPH	IAQ 250GPH	IAQ 350GPH	IAQ 500GPH	Type	PM2.5 Purifying Series					
	Replacement Filter Model (Optional)*	BAF244A300	BAF244A500C			BAF244A300			BAF244A300			BAF244A300	BAF244A500C			Image						
PM2.5 Exhaust Air Purifying Series	Combo Model	IAQ 150GPN	IAQ 250GPN	IAQ 350GPN	IAQ 500GPN	IAQ 100LPN	IAQ 200LPN	IAQ 300LPN	IAQ 100HPN	IAQ 200HPN	IAQ 300HPN	IAQ 150GPHN	IAQ 250GPHN	IAQ 350GPHN	IAQ 500GPHN	Equipped Filter Model	BAF424A20A (For PM2.5)					
	Replacement Filter Model (Optional)*	BAF244A300C	BAF244A500C			BAF244A300C			BAF244A300C			BAF244A300C	BAF244A500C			Type	PM2.5 Exhaust Air Purifying Series					
PM2.5 Professional Purifying Series	Combo Model															Image						
	Replacement Filter Model (Optional)*															Equipped Filter Model	BAF424A20A (For PM2.5) BAF424A20AC (For NO ₂ and SO ₂)					
Basic Parameters	Applicable Remote Controller	BRC301B611 (For coordinated control with indoor air conditioning unit, wired remote controller and corresponding to the indoor air conditioning units can be chosen)																				
	Wired Power Supply	1 - phase 220V, 50Hz																				
	Airflow Rate (m ³ /h)	150	250	350	500	100	200	300	100	200	300	150	250	350	500		800	1000	1500	2000		

* Filter is equipped in the filter box. For replacement purpose, please purchase a new filter model with reference to the "Replacement Filter Model (Optional)" and consult Daikin's engineer for further details.

Air Purifying Products

Heat Reclaim Ventilator (Standard Type)

Model	VAM800GMVE			VAM1000GMVE			VAM1500GMVE			VAM2000GMVE			
	Ultrahigh	High	Low	Ultrahigh	High	Low	Ultrahigh	High	Low	Ultrahigh	High	Low	
Power Supply	1 - Phase 220V, 50 Hz												
Power Consumption (W)	660			725			1225			1335			
Airflow Rate (m³/h)	800	800	665	1000	1000	840	1500	1500	1200	2000	2000	1600	
Operating Sound Level (dB(A))	42	40	37	42.5	40	37	42.5	41	38	43.5	41	39	
External Static Pressure (Pa)	130	90	85	160	115	90	110	80	55	110	55	40	
Temperature Exchange Efficiency (%)	Cooling	59	59	63	64	64	65.5	59	59	63.5	64	64	66
	Heating	76	76	80	76	76	78	76	76	81	76	76	79
Enthalpy Exchange efficiency (%)	Cooling	54	54	57	58	58	61	53	53	57.5	58	58	62
	Heating	65	65	68.5	67	67	70	65.5	65.5	69	67	67	71
Dimension (mm)	Height	387						785					
	Width	1110						1618					
	Depth	832						1214					
Weight (kg)	55			67			129			157			
Duct Diameter (mm)	Ø 250						Ø 350						


- Notes: 1. Operation range of standard heat exchanger: -15°C~50°C; humidity: below 80%
 2. The above data are based on the test results under GB Standards GB/T21087-2007
 3. When used with the pressure tank, the Heat Reclaim Ventilator can achieve airflow rates of 3000m³/h and 4000m³/h.
 4. Please refer to the product brochure for the specifications of Heat Reclaim Ventilator (Slim Type / Low-Temperature Slim Type / Standard Type) with airflow rate below 500m³/h and relevant filter boxes.

Optional Booster Fan Section For Larger Space

The optional Booster Fan Section can increase the airflow rate to 4000m³/h and external static pressure to 285Pa, providing sufficient pressure for a larger space.



Applicable Models and Combinations

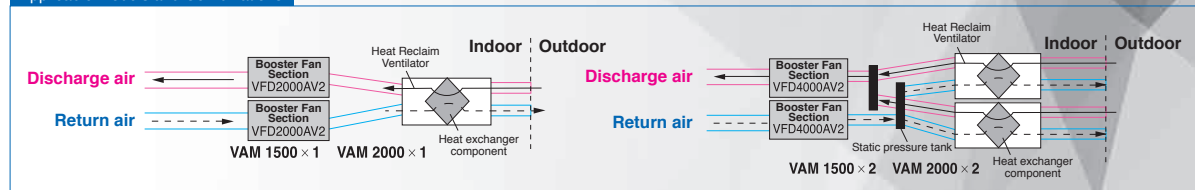

Booster Fan Section Specifications

Model	VFD2000AV2				VFD4000AV2			
Heat Reclaim Ventilator (Standard Type)	VAM2000GMVE x 1 (Fan mode: ultrahigh/ high)		VAM1500GMVE x 1 (Fan mode: low)		VAM2000GMVE x 2 (Fan mode: ultrahigh/ high)		VAM1500GMVE x 2 (Fan mode: low)	
Power Supply	1 - Phase 220V, 50 Hz							
Rated Energy Consumption	650				1300			
Dimension (HxWxD)	387 x 720 x 934				785 x 720 x 934			
Air Duct (HxW)	237 x 672				604 x 672			
Fan	Type	Multi-fin fan						
	Airflow Rate	Ultrahigh	m³/h	2000	—	4000	—	—
		High	m³/h	2000	—	4000	—	—
		Low	m³/h	—	1500	—	—	3000
	External Static Pressure	Ultrahigh	Pa	175	—	175	—	—
		High	Pa	120	—	120	—	—
Low		Pa	—	155	—	—	155	
Operation Sound Level	Ultrahigh	dB(A)	44	—	49	—	—	
	High	dB(A)	43	—	46	—	—	
	Low	dB(A)	—	42	—	—	44	
Weight	49				99			
Operation Environment	-15°CDB~50°CDB below 80%RH							

- Note: 1. Above model is part of a system and must be used with the Heat Reclaim Ventilator. Connector BRP50-2 is required to connect to Heat Reclaim Ventilator.
 2. Airflow Rate Option: ultrahigh or high; default airflow rate: low.

More Filter Box Options for Optimal Results

Series	PM2.5 purifying series				PM2.5 Exhaust purifying series				
	Compatible Heat Reclaim Ventilator Model	VAM800GMVE	VAM1000GMVE	VAM1500GMVE	VAM2000GMVE	VAM800GMVE	VAM1000GMVE	VAM1500GMVE	VAM2000GMVE
Airflow Rate (m³/h)	800	1000	1500	2000	800	1000	1500	2000	
Dimension (HxWxD) (mm)	470 x 971 x 370				470 x 971 x 370				
Duct Diameter (mm)	580 x 348				580 x 348				
PM2.5 filter	Initial Pressure Loss (Pa)	Below 40				Below 40			
	Dust Collection Efficiency ¹	Over 95%				Over 95%			
	Service Life ²	1 Year				1 Year			
	Replacement Filter (Optional) ³	BAF424A20A				BAF424A20A			
	Number of Filter	1				1			
SO ₂ and NO ₂ filter	Initial Pressure Loss (Pa)	Below 10				Below 10			
	Service Life ²	1 Year				1 Year			
	Replacement Filter (optional) ⁴	BAF424A20AC				BAF424A20AC			
	Number of Filter	1				1			
Total Initial Pressure Loss of Pure Filter Box (Pa)	Below 50				Below 50				

- *1 Remove over 95% of inhalable particles (≥10um in diameter)
 *2 Minimum test duration: 10 hours/day x 21days x12 months = 2,500 hours
 *3 GB Standards GB3095-1996 (Grade 2)
 *4 Filter is equipped in the filter box. For replacement purpose, please purchase a new filter model with reference to the "Replacement Filter Model (Optional)" and consult Daikin's engineer for further details.
 *5 To maintain the effectiveness of Daikin's fresh air filter accessories, please calculate and check the static pressure with reference to the external static pressure of VRV fresh air processing unit.

Outdoor Units

The Outdoor Unit Capacity Is Up To 66Hp In Increment Of 2HP

The single outdoor unit has only 2 different shape and dimensions, not only simplifying the design process, but also bringing the system flexibility to a new level.

With the outdoor unit capacity increased in increment of 2HP, customers' need can be precisely met.



- 8 HP RUXYQ8BA
- 10 HP RUXYQ10BA
- 12 HP RUXYQ12BA



- 14 HP RUXYQ14BA
- 16 HP RUXYQ16BA
- 18 HP RUXYQ18BA
- 20 HP RUXYQ20BA
- 22 HP RUXYQ22BA



- 24 HP RUXYQ24BA
- 26 HP RUXYQ26BA
- 28 HP RUXYQ28BA
- 30 HP RUXYQ30BA
- 32 HP RUXYQ32BA
- 34 HP RUXYQ34BA



- 36 HP RUXYQ36BA
- 38 HP RUXYQ38BA



- 40 HP RUXYQ40BA
- 42 HP RUXYQ42BA
- 44 HP RUXYQ44BA



- 46 HP RUXYQ46BA
- 48 HP RUXYQ48BA
- 50 HP RUXYQ50BA
- 52 HP RUXYQ52BA
- 54 HP RUXYQ54BA
- 56 HP RUXYQ56BA





- 58 HP RUXYQ58BA
- 60 HP RUXYQ60BA
- 62 HP RUXYQ62BA
- 64 HP RUXYQ64BA
- 66 HP RUXYQ66BA

Outdoor Series Combinations

Model	RUXYQ8BA	RUXYQ10BA	RUXYQ12BA	RUXYQ14BA	RUXYQ16BA	RUXYQ18BA	RUXYQ20BA	RUXYQ22BA			
Model	RUXYQ24BA	RUXYQ26BA	RUXYQ28BA	RUXYQ30BA	RUXYQ32BA	RUXYQ34BA	RUXYQ36BA	RUXYQ38BA	RUXYQ40BA	RUXYQ42BA	RUXYQ44BA
Combination	RUXYQ10BA	RUXYQ12BA	RUXYQ8BA	RUXYQ8BA	RUXYQ10BA	RUXYQ12BA	RUXYQ14BA	RUXYQ18BA	RUXYQ18BA	RUXYQ20BA	RUXYQ22BA
	RUXYQ14BA	RUXYQ14BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA
Model	RUXYQ46BA	RUXYQ48BA	RUXYQ50BA	RUXYQ52BA	RUXYQ54BA	RUXYQ56BA	RUXYQ58BA	RUXYQ60BA	RUXYQ62BA	RUXYQ64BA	RUXYQ66BA
Combination	RUXYQ10BA	RUXYQ12BA	RUXYQ8BA	RUXYQ10BA	RUXYQ10BA	RUXYQ12BA	RUXYQ14BA	RUXYQ20BA	RUXYQ18BA	RUXYQ20BA	RUXYQ22BA
	RUXYQ14BA	RUXYQ14BA	RUXYQ20BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA
	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA	RUXYQ20BA	RUXYQ22BA	RUXYQ22BA	RUXYQ22BA

Air Processing Unit

A recent trend rapidly gaining popularity is for air treatment to be required as well as air conditioning. Daikin's Outdoor Air Processing Unit can combine fresh air treatment and air conditioning, supplied from a single system.

Type	Model	Airflow Rate Range (m ³ /h)	1080	1680	2100	2500	3000	4000	5000	6000
Fresh Air Processing Unit	FXMFP~AB		•	•	•					
Large Capacity Fresh Air Processing Unit	FMQ~PG15 (150Pa)					•				
	FMQ~PG20 (200Pa)					•	•	•	•	•
	FMQ~PG30 (300Pa)					•	•	•	•	•
	FMQ~PG50 (500Pa)						•	•	•	
	FMQ~PG55 (550Pa)									•

Control System

Daikin provides a wide range of control system, a VRV system controller featuring an array of simple, useful system management functions for added value.

Advanced Centralized Control System



intelligent touch Manager
DCM601A611M



intelligent Manager III
DAM602B51M



intelligent touch Controller
DCS601C51C



Central Remote Controller
DCS302C611



Residential Central Remote Controller
DCS303A611



DS-AIR adaptor
DTA117B611




Unified ON/OFF Controller
DCS301B611


Control/Connection Interface




Interface for use in BACnet®
DMS502B51M




Interface for use in LONWORKS®
DMS504B51C



Interface for use in MODBUS
DTA116A621



Wiring adaptor for electrical appendices
KRP4A80




Wiring adaptor for electrical appendices
KRP1B80

Control System


Individual Control System

Wired Remote Controller

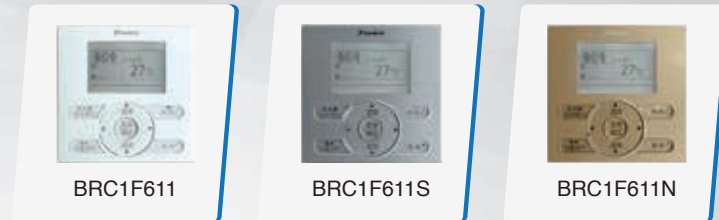


Type F wired remote controller

*Remote display language setting is available for Simplified Chinese/ English. Language on buttons is Simplified Chinese only.

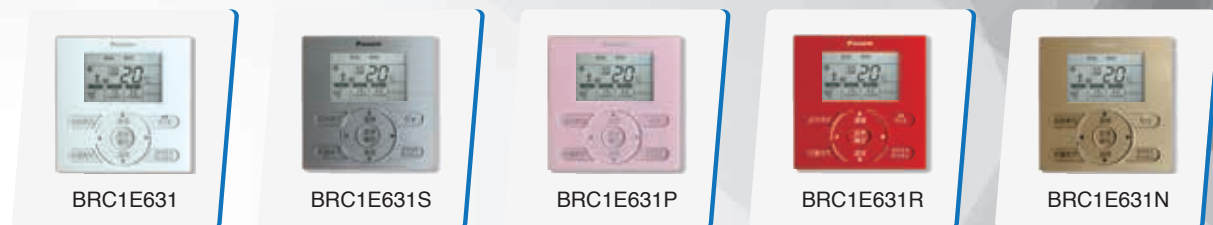

Type E wired remote controller

*Type E wired remote controller language is Simplified Chinese only.



Type C wired remote controller

Wireless Remote Controller







Warning



- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorised parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the user's manual carefully before using this product. The user's manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have any enquiries, please contact your local importer, distributor and/or retailer.

Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.

Daikin Airconditioning (Hong Kong) Ltd.

17-18F, Futura Plaza, 111-113 How Ming Street
Kwun Tong, Kowloon, Hong Kong.
Tel : (852) 2570 2786
Fax: (852) 2807 2484
www.daikin.com.hk



ISO 14001 : 2004
Certificate No.: CC 3416