



PCVHK1616

Warning



- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorised parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the user's manual carefully before using this product. The user's manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have any enquiries, please contact your local importer, distributor and/or retailer.

#### Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.

DAIKIN VRV IV Heat Pump 50 Hz

VRV IV

Heat Pump 50 Hz

**R-410A**

# Next Generation VRV IV System



VRV IV

First launched in Japan in 1982, the Daikin **VRV** system has been embraced by world markets for over 30 years. Now, Daikin proudly introduces the next generation **VRV IV** system. It now offers an enhanced lineup to meet an ever wider variety of needs while improving energy savings, comfort, and ease of installation.

Enhanced lineup

3 types up to 60 HP

Ease of installation

Compact & lightweight design

Energy saving

Higher COP and VRT technology

Comfort

Lower operation sound

## INDEX

Main Features

P03

Outdoor Unit Lineup

P17

Indoor Unit Lineup

P19

Specifications

P41

Outdoor Unit Combinations

P61

Option List

P63

Control Systems

P71

Air Treatment Equipment Lineup

P84

## Enhanced Lineup to 3 types

### High-COP Type



Energy Saving

Enables further energy saving  
12 HP-50 HP with 4 new models lineup

VRV III

VRV IV

COP 3.94	→	4.39	11% Increase
Installation Space 1.66 m <sup>2</sup>	→	2.13 m <sup>2</sup>	
Product Weight 490 kg	→	555 kg	

20 HP

### Standard Type



Up to 60 HP

Offers higher capacity of up to 60 HP  
6 HP-60 HP with 3 new models lineup

VRV III

VRV IV

COP 3.94	→	3.99	14% Decrease
Installation Space 1.66 m <sup>2</sup>	→	1.42 m <sup>2</sup>	22% Decrease
Product Weight 490 kg	→	380 kg	

20 HP

### Space Saving Type



Compact Design

New series with compact & lightweight design  
18 HP-50 HP with 17 new models lineup

VRV III

VRV IV

COP 3.94	→	3.11	43% Decrease
Installation Space 1.66 m <sup>2</sup>	→	0.95 m <sup>2</sup>	35% Decrease
Product Weight 490 kg	→	320 kg	

20 HP


### Lineup

HP	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
High-COP Type				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
Standard Type	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Space Saving Type							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					

## Energy saving


### Higher Coefficient of Performance (COP)

#### COP at 100% operation load

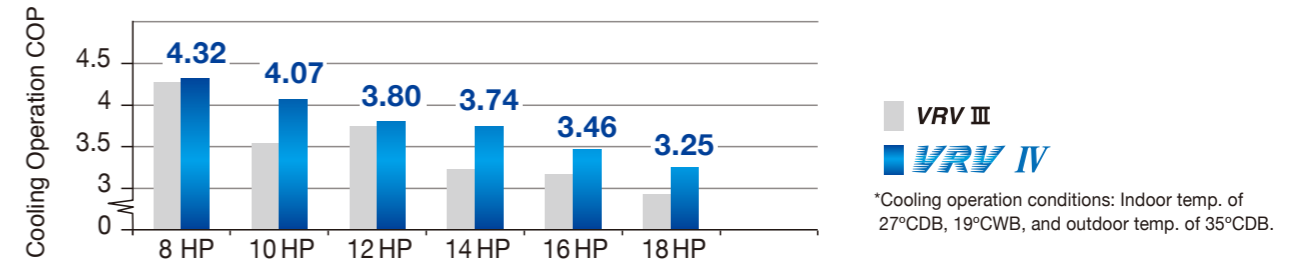


### Higher Coefficient of Performance (COP)

#### COP at 50% operation load

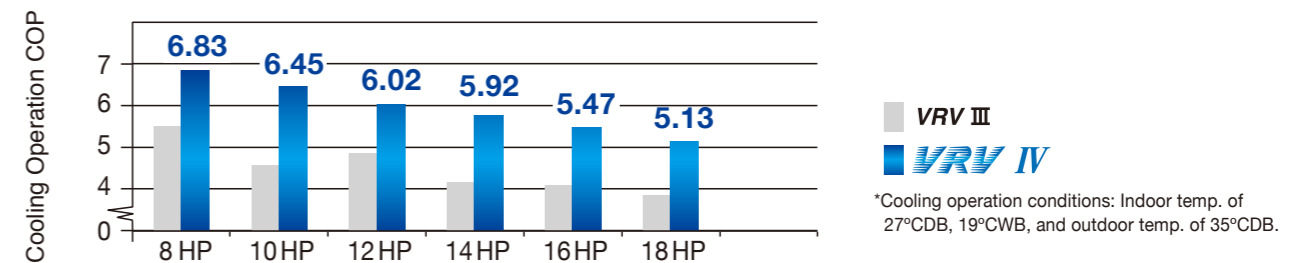

### Higher Coefficient of Performance (COP)

#### COP for 10 HP

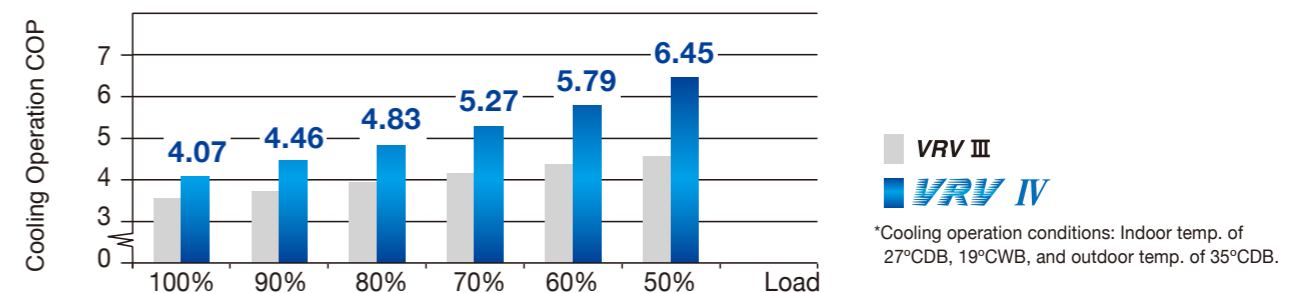

## Realising compact technology with performance



As a leading global innovator, Daikin advanced from the conventional 2 module combination to a single module for 20 HP model. This allows the installation area to reduce by 43% as compared to the previous VRV III 20 HP model.


With this unbridled passion for high quality and advanced technology solutions, the new 20 HP is designed with the following considerations:

### Design considerations

1. Increase surface area of heat exchanger for better performance
2. Easy maintenance
3. Sufficient cooling for electrical component
4. Eliminate suction resistance issue to enhance air flow volume.

### Increase surface area of heat exchanger

The unique 4-sided all round heat exchanger ensure sufficient surface area for the heat exchanger as oppose to conventional 3-sided heat exchanger. This improves the heat exchanger performance without increasing the footprint.

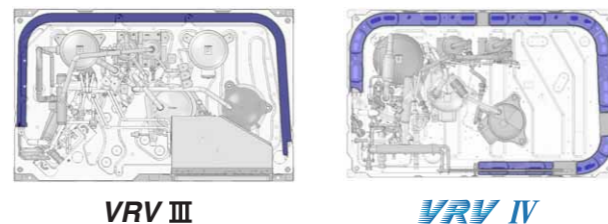


### Easy maintenance

In previous VRV III design, the electrical component is usually situated on the front surface which requires the whole electrical component to be removed before maintenance can be carried out.

With the new design, the electrical component is strategically located on the top which ease the maintenance process.


Moreover, the heat exchanger on the front side can be extended to take up the previous space used for the electrical component and improve its performance.

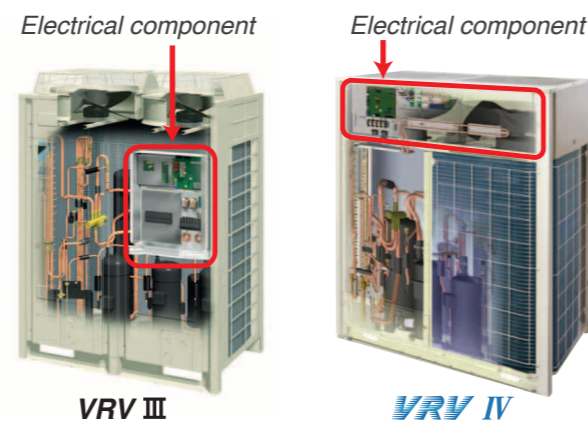

### Sufficient cooling for electrical component


The new 20 HP model is designed with the electrical box strategically located between a region of positive and negative pressure. This design allows a larger air flow from negative pressure to positive pressure due to the higher pressure difference.

The small holes created in the electric box are now close to the fan blower inlet, thus a significant pressure difference can still be achieved unlike that of VRV III.

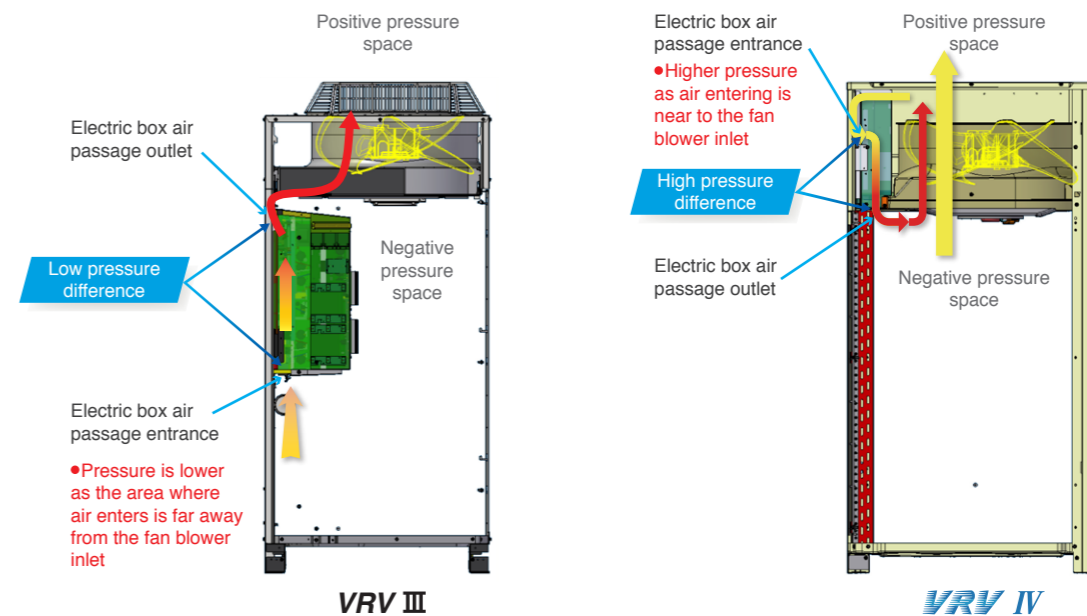

### Eliminate suction resistance issue

Without affecting the fan volume, the electric component is re-designed to the top and free up the dead space that existed in previous VRV III models. This eliminates the problem of suction resistance.

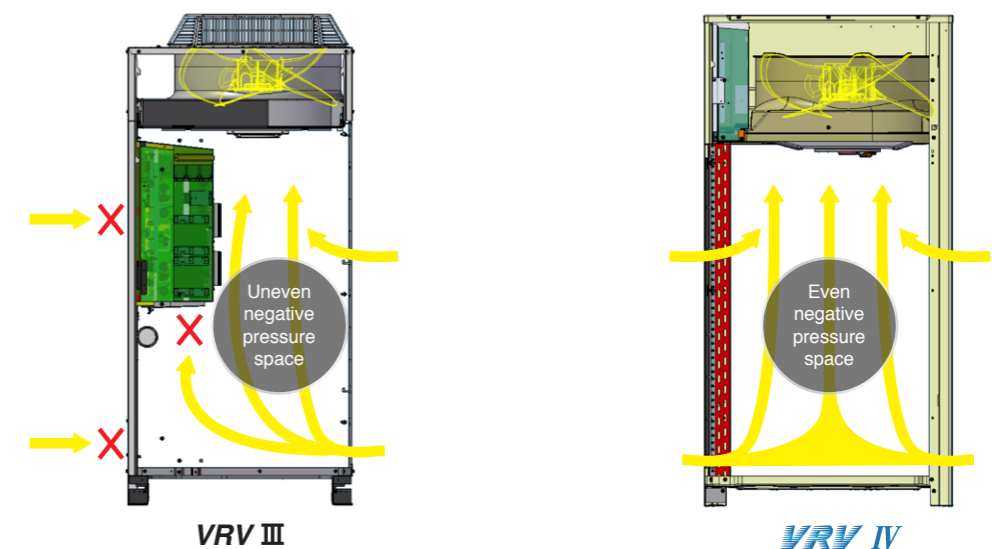


## State-of-the-art energy saving technology for VRV system

### Customise your VRV system for optimal annual efficiency




The new **VRV IV** system now features VRT technology. VRT automatically adjusts refrigerant temperature to individual building and climate requirement, thus further improving annual energy efficiency and maintaining comfort. With this excellent technology, running costs are reduced.

### How is energy reduced?

During cooling, the refrigerant evaporating temperature ( $T_e$ ) is raised to minimise the difference with the condensing temperature. During heating, condensing temperature ( $T_c$ ) is lowered to minimise the difference to the evaporating temperature. Compressors work less, and this reduces power consumption.

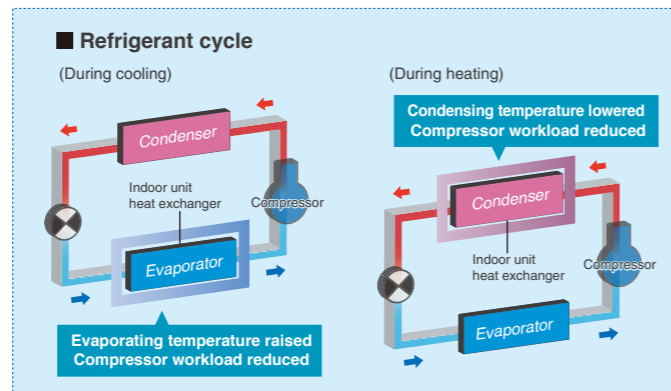

### Typical changes in evaporating temperature and COP depending on changing indoor load

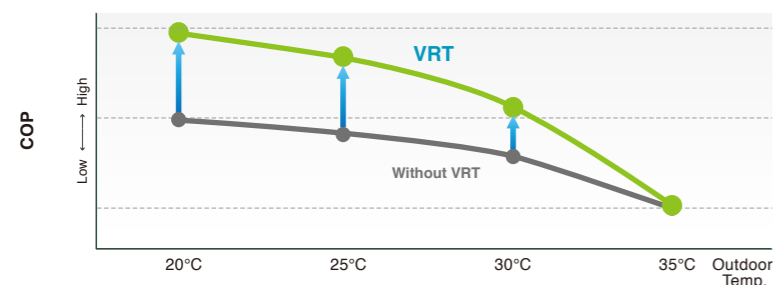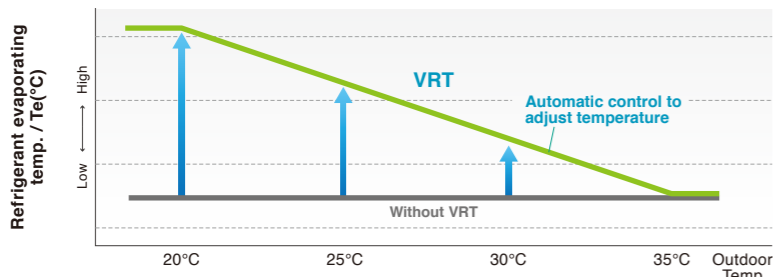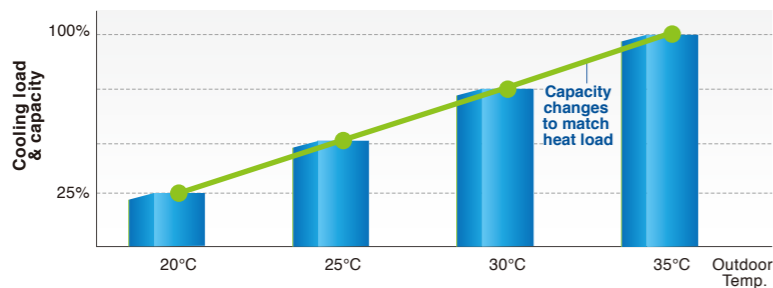

Required capacity changes as air conditioning load changes according to outdoor temperature.


In case of fixed evaporating temperature, excessive cooling, thermo on-off loss, and other inefficiencies occur.

Automatic control adjusts evaporating temperature to heat load change.


Energy efficiency is improved without sacrificing comfort.

### New system more energy saving

Basic mode is selected to maintain optimal comfort. VRT is selected to save energy and prevent excessive cooling or heating.

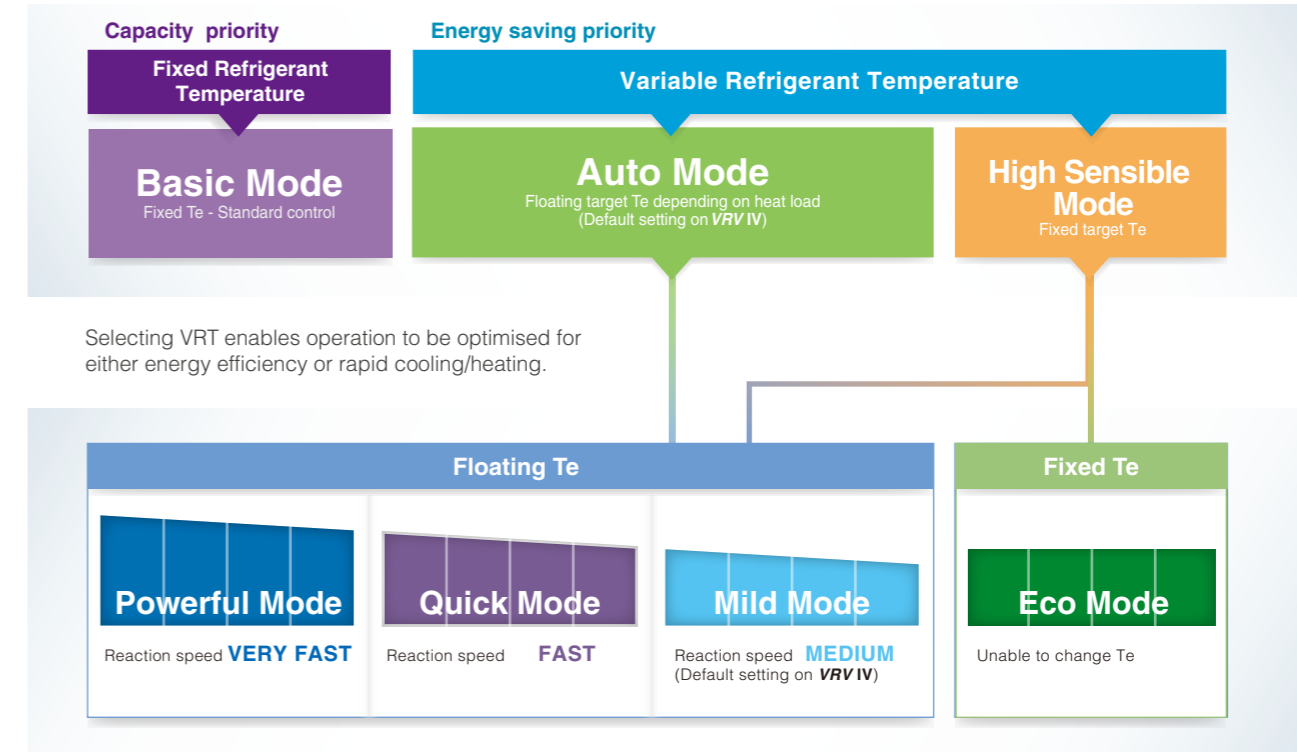


### VRT offers quicker cool down to shorten uncomfortable pull down time.

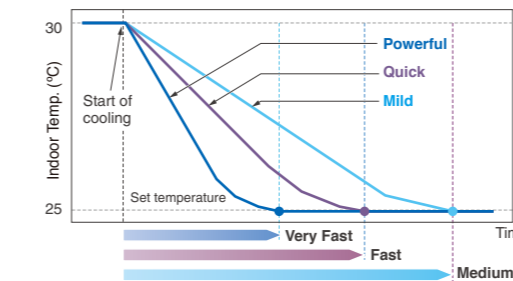

- Powerful Mode**
  - Can boost capacity above 100% if needed. The refrigerant temperature can go lower in cooling (higher in heating) than the set minimum (maximum in heating).
  - Gives priority to very fast reaction speed. The refrigerant temperature goes down (or up in heating) fast to keep the room setpoint stable.
- Quick Mode**
  - Gives priority to fast reaction speed. The refrigerant temperature goes down (or up in heating) fast to keep the room setpoint stable.
- Mild Mode**
  - Gives priority to efficiency. The refrigerant temperature goes down (or up in heating) gradually giving priority to the efficiency of the system instead of the reaction speed.


### Recommended for use in these situations

#### Cooling only regions having differences in daily temperature.

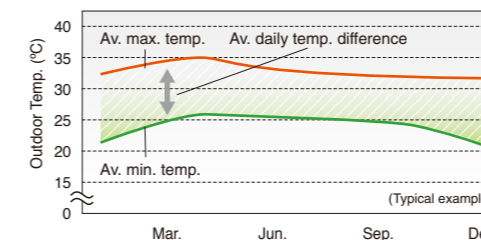

VRT is particularly effective at night when temperatures are low.

#### Cooling/heating regions having periods of mild outdoor temperatures.

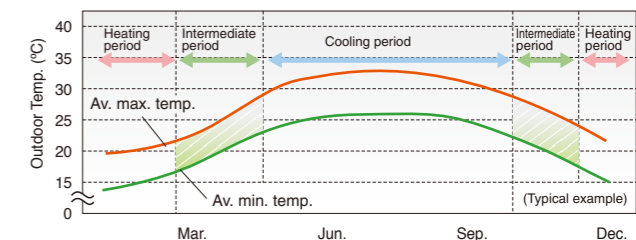

VRT is particularly effective during the intermediate periods.

## More options for installation location

### Long piping length

The long piping length provides more design flexibility, which can match even large-sized buildings.

For connection of only VRV indoor units

Max. actual piping length **165 m**


Max. equivalent piping length **190 m**

Max. total piping length **1000 m**

Max. level difference between the outdoor units and the indoor units **90 m<sup>\*2</sup>**

Max. level difference between the indoor units **30 m**

15 m higher than VRV III

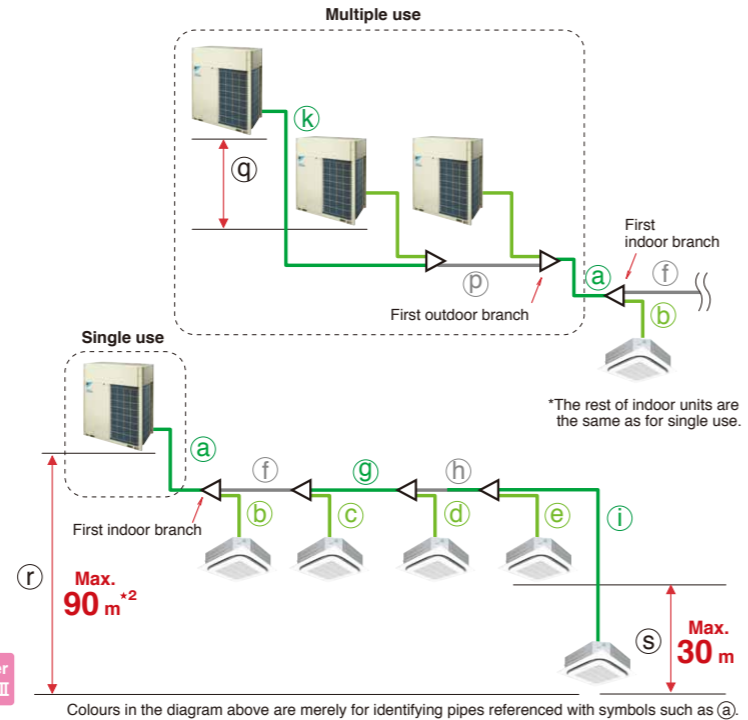

	Actual piping length	Example	Equivalent piping length
Refrigerant piping length	165 m	a+f+g+h+i	190 m
Total piping length	1000 m	a+b+c+d+e+f+g+h+i	-
Between the first indoor branch and the farthest indoor unit	90 m <sup>*1</sup>	f+g+h+i	-
Between the outdoor branch and the last outdoor unit	10 m	k+p	13 m

	Level Difference	Example
Between the outdoor units (Multiple use)	5 m	q
Between the indoor units	30 m	s
Between the outdoor units and the indoor units	If the outdoor unit is above.	90 m <sup>*2</sup>
	If the outdoor unit is below.	90 m <sup>*2</sup>

\*1. No special requirements up to 40 m. The maximum actual piping length can be 90 m, depending on conditions. Various conditions and requirements have to be met to allow utilisation of 90 m piping length. Be sure to refer to the Engineering Data Book for details of these conditions and requirements.  
 \*2. When level differences are 50 m or more, the diameter of the main liquid piping size must be increased. If the outdoor unit is above the indoor unit, a dedicated setting on the outdoor unit is required. Refer to the Engineering Data Book and contact your local dealer for more information.

### Connection ratio

Connection capacity at maximum is 200%.

Connection ratio **50%–200%**


$$\text{Connection ratio} = \frac{\text{Total capacity index of the indoor units}}{\text{Capacity index of the outdoor units}}$$

### Conditions of VRV indoor unit connection capacity

Applicable VRV indoor units	Other VRV indoor unit models <sup>*1</sup>
FXDQ, FXSQ, FXMQ-P, FXAQ models	
Single outdoor units	200%
Double outdoor units	160%
Triple outdoor units	130%

\*1 For the FXFQ25LU, FXFQ25S and FXVQ models, maximum connection ratio is 130% for the entire range of outdoor units.  
**Note:** If the operational capacity of indoor units is more than 130%, low airflow operation is enforced in all the indoor units.  
 \*Refer to page 61-62 for outdoor unit combination details.

For mixed combination of VRV and residential indoor units

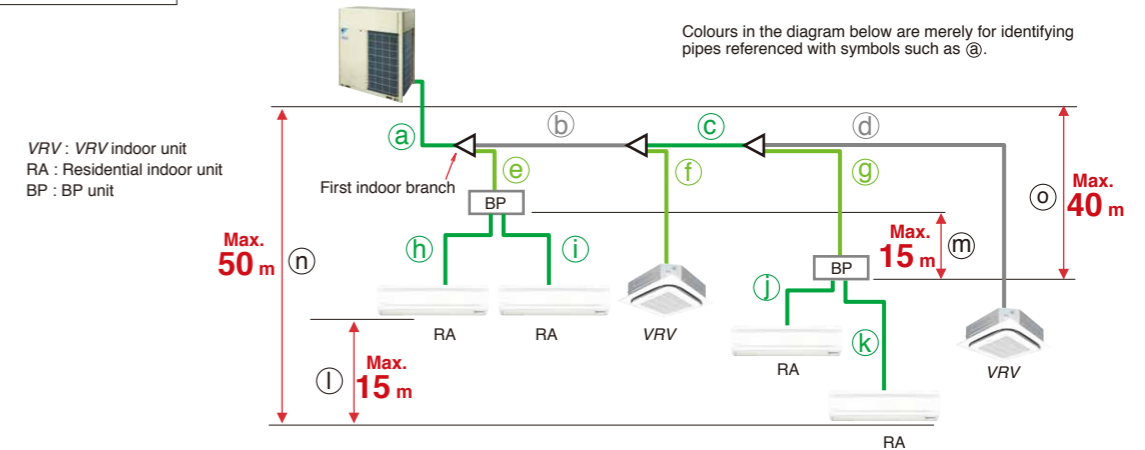

When a mixed combination of VRV and residential indoor units is connected or when only residential indoor units are connected

	Actual piping length	Example
Refrigerant piping length	100 m	a+b+c+g+k, a+b+c+d
Total piping length	250 m	a+b+c+d+e+f+g+h+i+j+k
Maximum allowable piping length	Between BP unit and indoor unit	If indoor unit capacity index < 60. 2 m–15 m If indoor unit capacity index is 60. 2 m–12 m If indoor unit capacity index is 71. 2 m–8 m
	Between the first indoor branch and the farthest BP unit or between the first indoor branch and the farthest VRV indoor unit	50 m <sup>*1</sup>
	Minimum allowable piping length	Between outdoor unit and the first indoor branch

	Level Difference	Example
Between the indoor units	15 m	l
Between BP units	15 m	m
Between the outdoor unit and the indoor unit	If the outdoor unit is above.	50 m
	If the outdoor unit is below.	40 m
Between the outdoor unit and the BP unit	40 m	o

\*1. When the piping length exceeds 20 m, the size of the main pipes (the gas side and the liquid side) must be increased. Please refer to Engineering Data Book for details.

\*When a mixed combination of VRV and residential indoor units is connected or when only residential indoor units are connected, connection ratio must be 80% to 130%. Refer to page 62 for outdoor unit combination details.

### High external static pressure

VRV IV outdoor unit has been achieved high external static pressure up to 78.4 Pa, ensuring the efficient heat dissipation and stable operation of equipment in either hierarchical or intensive arrangement.




## Multiple advanced features ensuring more accurate test operation and stable system

### Efficient automatic test operation

Daikin **VRV IV** system incorporates a simplified and efficient test operation function, not only greatly accelerating the installation process, but effectively improving the field setting quality as well.

- Automatically checks the wirings between outdoor units and indoor units to confirm whether there is a defective wiring.
- Confirms and corrects the actual piping length.
- Automatically check whether the stop valve in each outdoor unit is in normal status to ensure the smooth operation of air conditioning system.

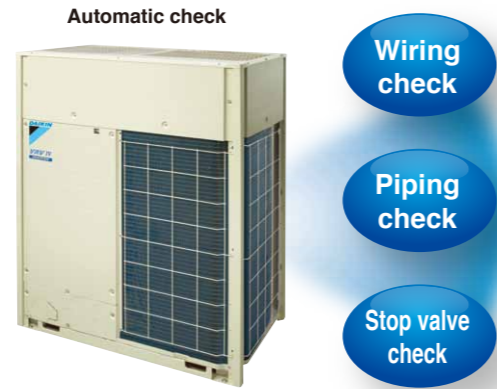

## Ease of installation

### Compact & lightweight design

Highly-integrated **VRV IV** system offers compact outdoor units to achieve maximum utilisation of the installation space.




Installation Space	0.95 m <sup>2</sup>	→	0.71 m <sup>2</sup>	25% Decrease
Product Weight	285 kg	→	195 kg	32% Decrease

## Simplified commissioning and after-sales service


### Function of information display by luminous digital tube

**VRV IV** system utilises 7-segment luminous digital tubes to display system operation information, enabling the operational state to be visually displayed whilst facilitating simplified commissioning and after-sales service.

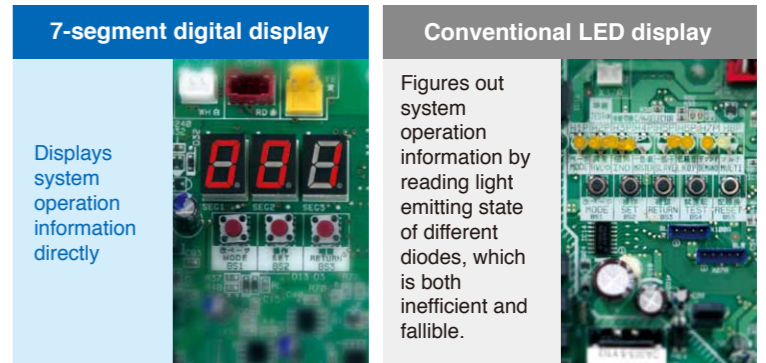

### VRV configurator


- The **VRV configurator** is an advanced software solution that allows for easy system configuration and commissioning.
- Less time is required on the roof configuring the outdoor unit.
- Multiple systems at different sites can be managed in exactly the same way, thus offering simplified commissioning for key accounts.
- Initial settings on the outdoor unit can be easily retrieved.

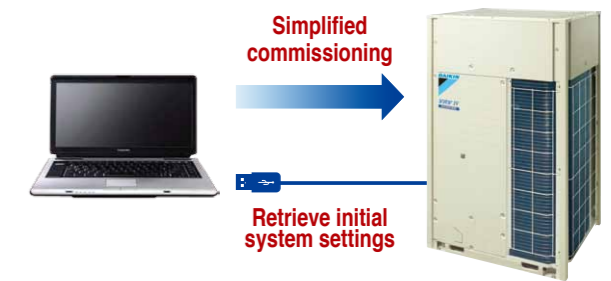

## Outdoor unit sequencing technology

### Automatic sequencing operation


During start-up, Daikin **VRV IV** unit sequencing operation will be automatically enabled to ensure balanced operation of each outdoor unit to improve longevity of equipment and stable operation.

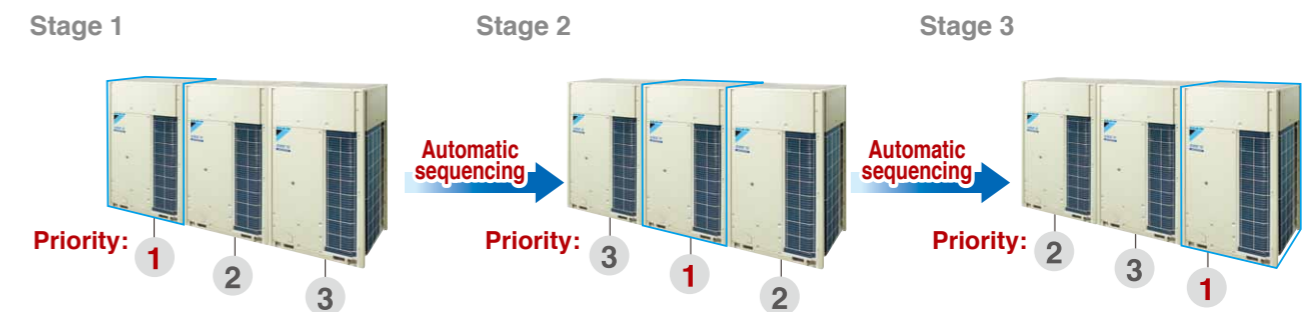

## I-demand function

Limit to power consumption can be set precisely to one of 11 levels. Peak power cut-off can be accomplished according to each user situation.

\*Set on the circuit board of the outdoor unit.

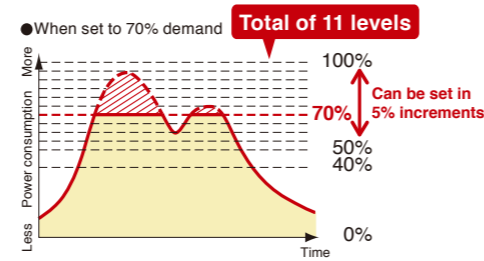

## Double backup operation functions responding resiliently to various unexpected situations

### Double backup operation functions

Daikin **VRV IV** system boasts double backup operation functions, which can secure the use of air conditioners in this area to the greatest extent by emergently enabling double backup operation functions even if failure occurs in a set of air conditioning equipment.

In the event of a failure, emergency operation can be conveniently enabled to allow the remaining system to operate in a limited fashion.

#### Unit backup operation function

**If malfunction occurs in an outdoor unit...**  
Emergency operation can be conveniently set and enabled by the remote controller for indoor unit (for systems composed of two or more outdoor units).




#### Compressor backup operation function

**If malfunction occurs in a compressor...**  
Emergency operation can be easily set and enabled by the outdoor unit (for a single outdoor unit system RXYQ14-20TAY1 models).




## Wide operation temperature range

The versatile operation range of the **VRV IV** system works to reduce limitations on installation locations. The operation temperature range for heating goes all the way down to  $-20^{\circ}\text{C}$ , while cooling can be performed with outdoor temperatures as high as  $49^{\circ}\text{C}$ . Both these achievements are due to the employment of a high-pressure dome-type compressor.

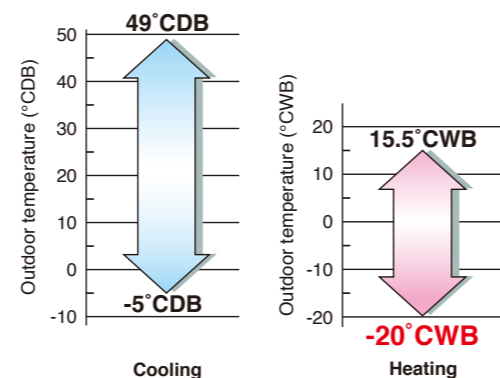

## Ease of Maintenance

**VRV IV** provides maintenance feature\* which allows the shutdown of FCU without shutting down the whole **VRV** system. This feature comes in handy during maintenance period as the remaining indoor units continue to operate.

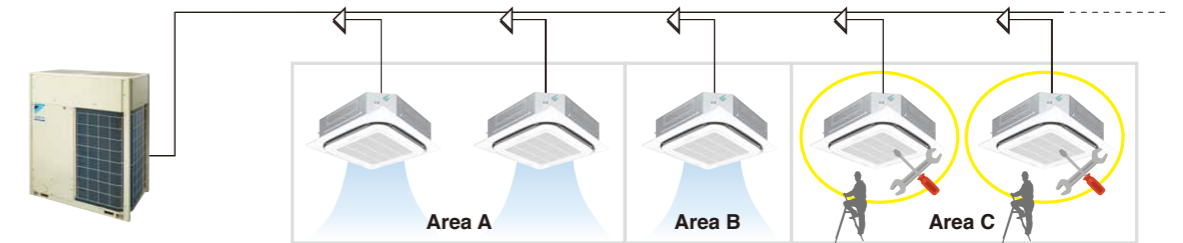

\* Field setting is required.  
This feature does not apply to BP unit connection.  
For more information, please contact Daikin sales office.

## Comfort

### Lower operation sound


Improve heat exchanger efficiency, helps to reduced operation sound.

	Sound level(dB(A))			
	6 HP	8 HP	10 HP	12 HP
<b>VRV III</b>	57	57	58	60
<b>VRV IV</b>	55	56	57	59

1-2 dB(A) reduction than conventional model


### Large airflow, high static pressure and quiet technology

Without increasing operation sound, advanced analytic technologies are utilised to optimise fan design and increase airflow rate and high external static pressure.

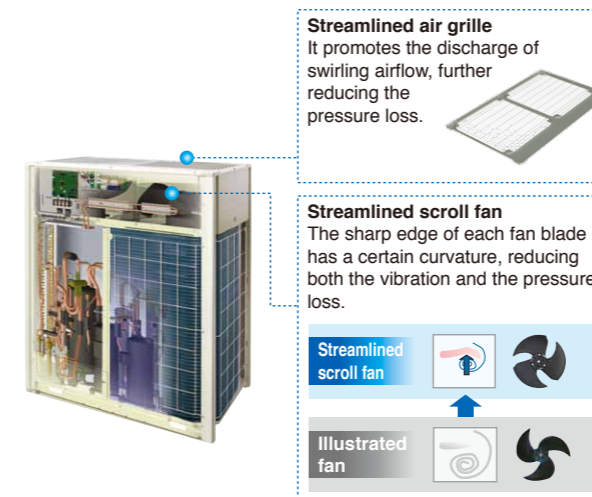

### Nighttime quiet operation function

Outdoor PCB automatically memorises the time when the peak outdoor temperature appears. It will enable quiet operation mode after 8 h<sup>1</sup>, and return to normal mode after it keeps for 9 h<sup>2</sup>.

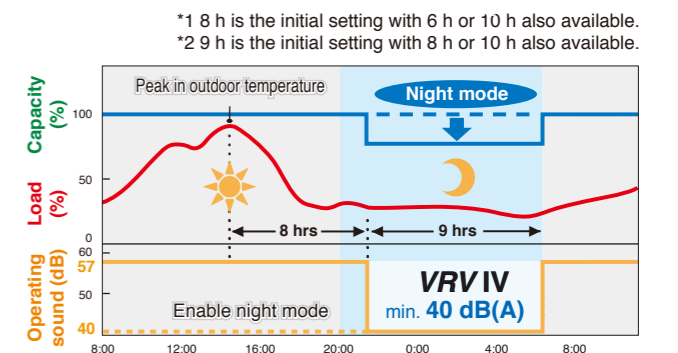

Note: · This function is available in setting at site.  
· The operating sound in quiet operation mode is the actual value measured by our company.  
· The relationship of outdoor temperature (load) and time shown above is just an example.



## Large capacity all DC inverter compressor in compact casing


Large capacity all DC inverter compressor using high tension strength material, realise 12 HP compressor using 8 HP casing.

### Development of high strength material

Gives 2.4 times tensile strength compare to conventional material  
**New Material: 600 MPa**  
**Conventional Material : 250 MPa**  
 Increase compression chamber volume by using thin spiral design.




As a result of having thinned a wall - thickness of the scroll, compression chamber volume increase 50%

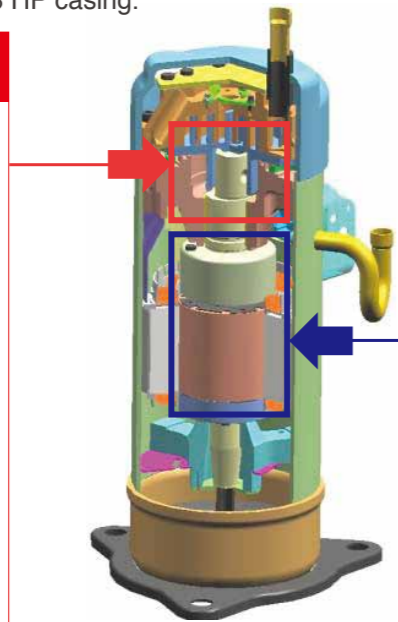

### Small type high efficiency concentrated winding motor

Distributed winding motor (Current 8 HP compressor)    Concentrated winding motor (New 12 HP compressor)

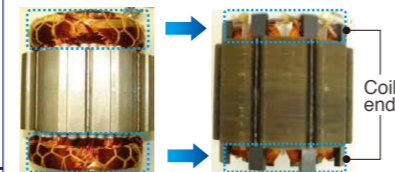

Small sizing coil end using concentrated winding, reduce copper loss (winding resistance).


Improve motor efficiency in low rpm range (improve intermediate efficiency).

## ODM Motor

Only Daikin adapted ODM motor with feature of stable rotation and volumetric efficiency


### Advantages of ODM

- Thanks to large diameter of the rotor,
- ① Large torque with same electromagnetic force
  - ② Stable rotation in all range, and can be operated with small number of rotations

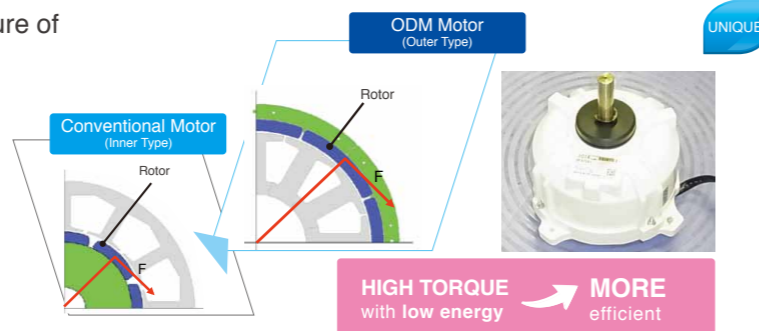

## Highly integrated heat exchanger

Improve performance by increasing heat exchanger area while maintaining the same installation space.

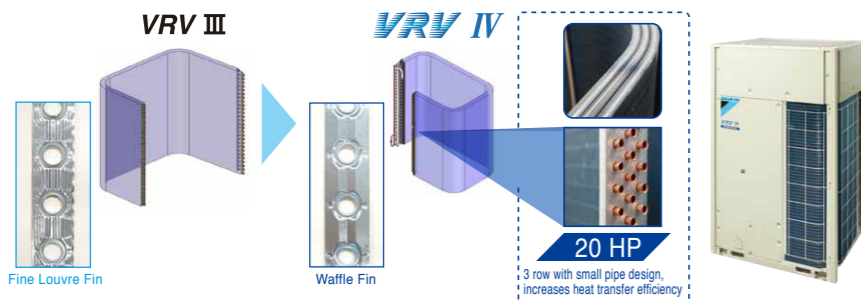

Realise highly integrated heat exchanger performance (increase row, reduce fin pitch) by reducing of airflow resistance which changes cooling tube to Ø7.


Change fin shape from fine louvre to waffle fin. Fin pitch can be reduced fin pitch from 2.0 mm to 1.4 mm, to realise unit efficiency which increased heat exchanger area.

## Various advanced control main PC board


### SMT\* packaging technology

- SMT packaging technology adopted by the whole computer control panel improves the anti-clutter performance.
- Protects your computer boards from the adverse effect of sandy and humid weather.

### Computer control board surface adopting SMT packaging technology

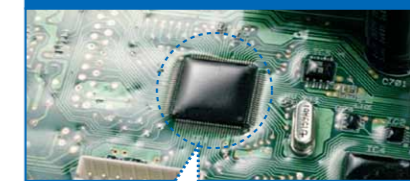

### Conventional computer control board surface






\*SMT: Surface mounted technology

### Refrigerant cooling technology, ensures stability of PCB temperature

#### Improved inner design to increase smooth airflow

Downsize electric component, re-locate to dead space of bell mouth side to decrease airflow resistance.

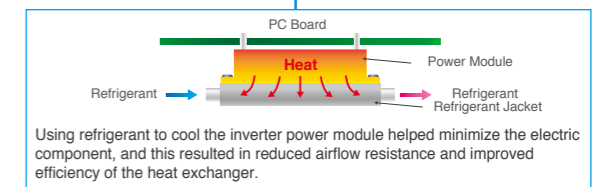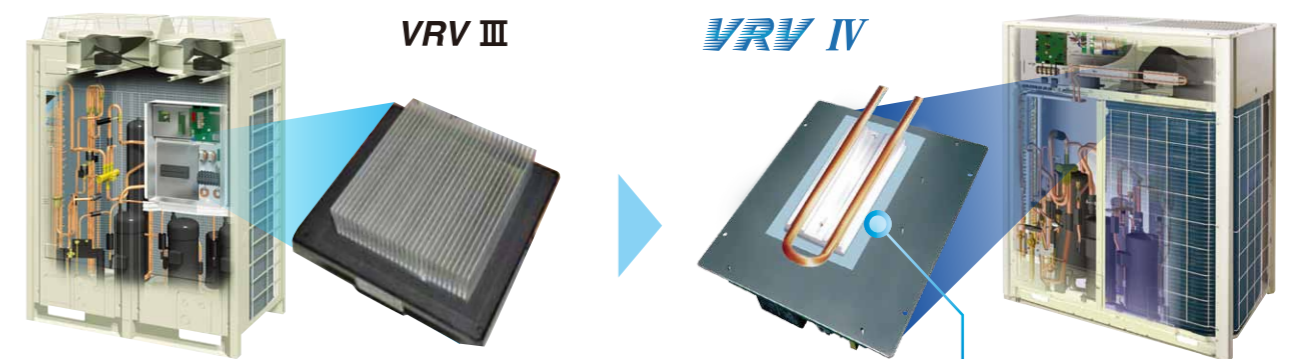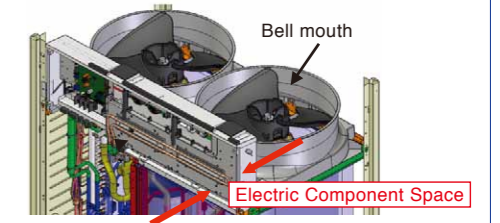

Using refrigerant to cool the inverter power module helped minimize the electric component, and this resulted in reduced airflow resistance and improved efficiency of the heat exchanger.

Roof terrace temperature in summer is over 40 °C, seriously affecting inverter cooling efficiency, resulting in decline of inverter operating speed. Finally device parts response speed is reduced.

### Improve reliability at high ambient temperature

It is possible to cool the inverter power module stability even at high ambient temperature. This helps to keep air-conditioning capacity and also reduces failure ratio.

Control board failure ratio at stable operation is reduced.

## Outdoor Units

## Heat Pump

The outdoor unit capacity is up to 60 HP in increment of 2 HP.

- VRV IV outdoor unit offers a higher capacity of up to 60 HP, responding to the needs of large-sized building.
- The single outdoor unit has only 2 different shapes and dimensions, not only simplifying the design process, but also bringing the system flexibility to a new level.
- With the outdoor unit capacity increased in increment of 2 HP, customers' needs can be precisely met.
- Outdoor units with anti-corrosion specifications (-E type on request) are designed specifically for use in areas which are subject to salt damage and atmospheric pollution.

### Lineup

HP	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
High-COP Type				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
Standard Type	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Space Saving Type							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					

### High-COP Type

#### ● Double Outdoor Units

12, 14, 16 HP  
(32.0, 38.4, 44.8 kW)



RXYQ12TAHY1(E)  
RXYQ14TAHY1(E)  
RXYQ16TAHY1(E)

#### ● Triple Outdoor Units

18, 20, 22, 24, 26, 28, 30, 32 HP  
(48.0, 54.4, 60.8, 67.2, 72.8, 78.3, 83.9, 89.4 kW)



RXYQ18TAHY1(E) RXYQ24TAHY1(E) RXYQ30TAHY1(E)  
RXYQ20TAHY1(E) RXYQ26TAHY1(E) RXYQ32TAHY1(E)  
RXYQ22TAHY1(E) RXYQ28TAHY1(E)

34, 38 HP  
(95.9, 107 kW)



RXYQ34TAHY1(E)  
RXYQ38TAHY1(E)

36, 40 HP  
(102, 114 kW)



RXYQ36TAHY1(E)  
RXYQ40TAHY1(E)

42, 44, 46, 48, 50 HP  
(120, 125, 130, 135, 140 kW)



RXYQ42TAHY1(E) RXYQ48TAHY1(E)  
RXYQ44TAHY1(E) RXYQ50TAHY1(E)  
RXYQ46TAHY1(E)

### Standard Type

#### ● Single Outdoor Units

6, 8, 10, 12 HP  
(16.0, 22.4, 28.0, 33.5 kW)



RXYQ6TAY1(E)  
RXYQ8TAY1(E)  
RXYQ10TAY1(E)  
RXYQ12TAY1(E)

14, 16 HP  
(40.0, 45.0 kW)



RXYQ14TAY1(E)  
RXYQ16TAY1(E)

#### ● Double Outdoor Units

18, 20 HP  
(50.4, 55.9 kW)



RXYQ18TANY1(E)  
RXYQ20TANY1(E)

22, 24, 26 HP  
(62.4, 68.0, 73.5 kW)



RXYQ22TANY1(E) RXYQ24TANY1(E)  
RXYQ26TANY1(E)

28, 30, 32 HP  
(80.0, 85.0, 90.0 kW)



RXYQ28TANY1(E) RXYQ30TANY1(E)  
RXYQ32TANY1(E)

#### ● Triple Outdoor Units

34, 36 HP  
(95.0, 101 kW)



RXYQ34TANY1(E)  
RXYQ36TANY1(E)

38, 40 HP  
(106, 112 kW)



RXYQ38TANY1(E)  
RXYQ40TANY1(E)

42, 44 HP  
(119, 124 kW)



RXYQ42TANY1(E)  
RXYQ44TANY1(E)

46, 48, 50, 52, 54, 56, 58, 60 HP  
(130, 135, 140, 145, 150, 156, 162, 168 kW)



RXYQ46TANY1(E) RXYQ54TANY1(E)  
RXYQ48TANY1(E) RXYQ56TANY1(E)  
RXYQ50TANY1(E) RXYQ58TANY1(E)  
RXYQ52TANY1(E) RXYQ60TANY1(E)

### Space Saving Type

#### ● Single Outdoor Units

18, 20 HP  
(50.0, 56.0 kW)



RXYQ18TASY1(E)  
RXYQ20TASY1(E)

#### ● Double Outdoor Units

22, 24 HP  
(61.5, 67.0 kW)



RXYQ22TASY1(E)  
RXYQ24TASY1(E)

26, 28, 30, 32 HP  
(72.4, 78.5, 83.5, 89.5 kW)



RXYQ26TASY1(E) RXYQ30TASY1(E)  
RXYQ28TASY1(E) RXYQ32TASY1(E)

#### ● Double Outdoor Units

34, 36, 38, 40 HP  
(95.0, 100, 106, 112 kW)



RXYQ34TASY1(E) RXYQ38TASY1(E)  
RXYQ36TASY1(E) RXYQ40TASY1(E)

#### ● Triple Outdoor Units

42, 44 HP  
(117, 123 kW)



RXYQ42TASY1(E)  
RXYQ44TASY1(E)

46, 48, 50 HP  
(129, 134, 140 kW)



RXYQ46TASY1(E)  
RXYQ48TASY1(E)  
RXYQ50TASY1(E)

## Enhanced range of choices

A mixed combination of VRV indoor units and residential indoor units is enabled all in one system, opening the door to stylish and quiet indoor units.

### VRV indoor units

18 types 93 models

Type	Model Name	Capacity Range	20	25	32	40	50	63	71	80	100	125	140	200	250
			0.8 HP	1 HP	1.25 HP	1.6 HP	2 HP	2.5 HP	3 HP	3.2 HP	4 HP	5 HP	6 HP	8 HP	10 HP
			Capacity Index	20	25	31.25	40	50	62.5	71	80	100	125	140	200
Ceiling Mounted Cassette (Round Flow with Sensing)	FXFQ-SVM		●	●	●	●	●			●	●	●			
Ceiling Mounted Cassette (Round Flow)	FXFQ-LUV1		●	●	●	●	●			●	●	●			
Ceiling Mounted Cassette (Compact Multi Flow)	FXZQ-MVE		●	●	●	●	●								
4-Way Flow Ceiling Suspended	FXUQ-AVEB								●		●				
Ceiling Mounted Cassette (Double Flow)	FXCQ-MVE		●	●	●	●	●	●		●		●			
Ceiling Mounted Cassette Corner	FXKQ-MAVE			●	●	●		●							
Slim Ceiling Mounted Duct	FXDQ-PBVE (with drain pump)		●	●	●										
	FXDQ-PBVET (without drain pump) (700 mm width type)		●	●	●										
	FXDQ-NBVE (with drain pump)					●	●	●							
	FXDQ-NBVET (without drain pump) (900/1,100 mm width type)					●	●	●							
Middle Static Pressure Ceiling Mounted Duct	<b>New</b> FXSQ-PVE		<b>New</b>	<b>New</b>	<b>New</b>	<b>New</b>	<b>New</b>	<b>New</b>		<b>New</b>	<b>New</b>	<b>New</b>	<b>New</b>		
Ceiling Mounted Duct	FXMQ-PVE		●	●	●	●	●			●	●	●	●		
	FXMQ-MAVE													●	●
Outdoor-Air Processing Unit	FXMQ-MFV1												●	●	●
Ceiling Suspended	FXHQ-MAVE				●						●				
Wall Mounted	FXAQ-PVE		●	●	●	●	●								
Floor Standing	FXLQ-MAVE		●	●	●	●	●								
Concealed Floor Standing	FXNQ-MAVE		●	●	●	●	●								


### Residential indoor units with connection to BP units

4 types 12 models

Type	Model Name	Rated Capacity (kW)	20	25	35	50	60	71
			2.0	2.5	3.5	5.0	6.0	7.1
			Capacity Index	20	25	35	50	60
Slim Ceiling Mounted Duct	CDXS-EAVMA			●	●			
	FDXS-CVMA			●	●	●	●	
Wall Mounted	FTXS-DVMA		●					
	FTXS-EVMA			●	●			
	FTXS-FVMA					●	●	●

Note: BP units are necessary for residential indoor units. Only single outdoor unit (RXYQ6-20TAY1) can be connected.

### VRV indoor units combine with residential indoor units, all in one system.

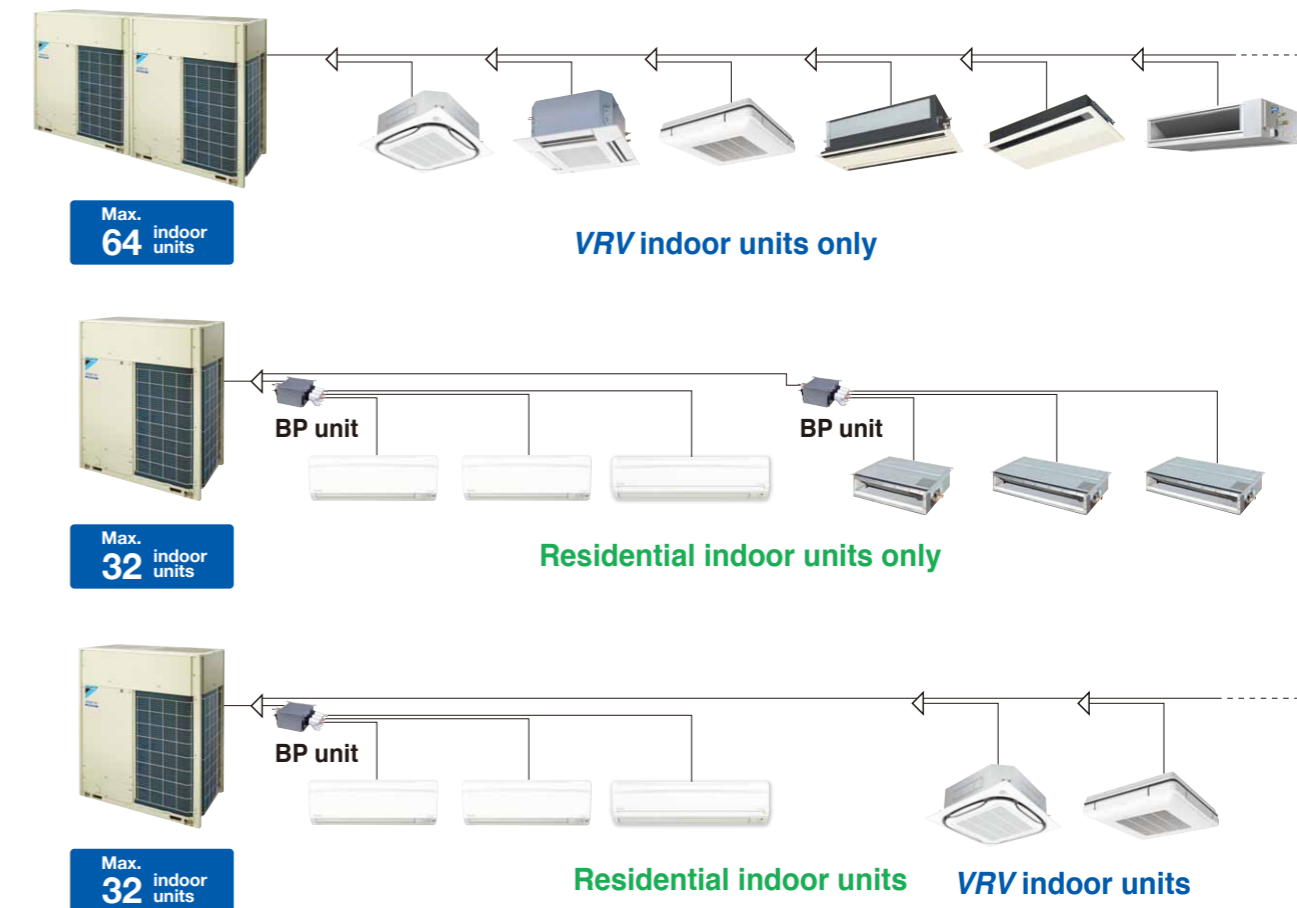

\*Refer to page 61-62 for the maximum number of connectable indoor units.

Daikin offers a wide range of indoor units includes both VRV and residential models responding to variety of needs of our customers that require air-conditioning solutions.

## VRV Indoor Units

Ceiling Mounted Cassette (Round Flow with Sensing) Type

**FXFQ-SVM**



Presence of people and floor temperature can be detected to provide comfort and energy savings



Ceiling Mounted Cassette (Round Flow) Type

**FXFQ-LUV1**



360° airflow improves temperature distribution and offers a comfortable living environment.



Ceiling Mounted Cassette (Compact Multi Flow) Type

**FXZQ-MVE**



Quiet, compact, and designed for user comfort



4-Way Flow Ceiling Suspended Type

**FXUQ-AVEB**



This slim and stylish indoor unit achieves optimum air distribution, and can be installed without the need for ceiling cavity



Ceiling Mounted Cassette (Double Flow) Type

**FXCQ-MVE**



Thin, lightweight, and easy to install in narrow ceiling spaces



Ceiling Mounted Cassette Corner Type

**FXKQ-MAVE**



Slim design for flexible installation



Slim Ceiling Mounted Duct Type

**FXDQ-PBVE(T)**



**FXDQ-NBVE(T)**



Slim design, quietness and static pressure switching



Middle Static Pressure Ceiling Mounted Duct Type

**New FXSQ-PVE**



Middle external static pressure and slim design allow flexible installations



Ceiling Mounted Duct Type

**FXMQ-PVE**



**FXMQ-MAVE**



High external static pressure allows flexible installations



Outdoor-Air Processing Unit

**FXMQ-MFV1**



Combine fresh air treatment and air conditioning, supplied from a single system.



Ceiling Suspended Type

**FXHQ-MAVE**



Slim body with quiet and wide airflow



Wall Mounted Type

**FXAQ-PVE**



Stylish flat panel design harmonised with your interior décor



Floor Standing Type

**FXLQ-MAVE**



Suitable for perimeter zone air conditioning



Concealed Floor Standing Type

**FXNQ-MAVE**



Designed to be concealed in the perimeter skirting-wall



## Residential Indoor Units with connection to BP units

Slim Ceiling Mounted Duct Type

**CDXS-EAVMA**



**FDXS-CVMA**



Slim and smooth design suits your shallow ceiling



Wall Mounted Type

**FTXS-DVMA**  
**FTXS-EVMA**



**FTXS-FVMA**



Stylish flat panel harmonises with your interior décor



## VRV Indoor Units


### Ceiling Mounted Cassette (Round Flow with Sensing) Type

FXFQ25S / FXFQ32S / FXFQ40S  
FXFQ50S / FXFQ63S / FXFQ80S  
FXFQ100S / FXFQ125S



### Round flow with sensing

Presence of people and floor temperature can be detected to provide comfort and energy savings

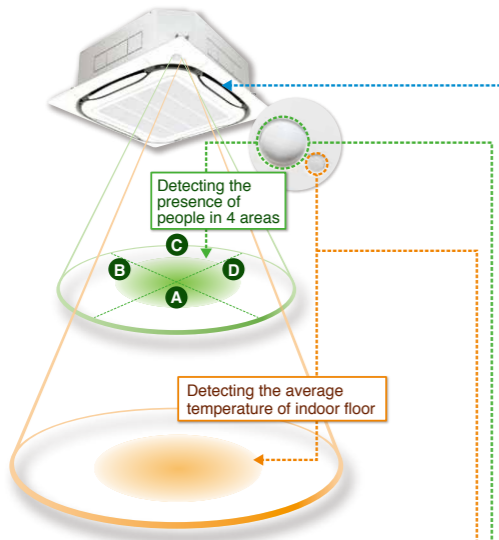


Indoor unit offers 360° airflow discharges air in all directions with more uniform temperature distribution.



Improved energy efficiency thanks to a new heat exchanger with smaller tubes, DC fan motor, and DC drain pump motor.

Low operation sound level

Drain pump is equipped as standard accessory with 850 mm lift.



Selectable airflow rate: 3 steps and Auto. (Auto airflow rate is available when BRC1E62 is used.)

An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours. (The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)



#### Individual airflow direction control

Thanks to the individual airflow direction control function, airflow direction can be individually adjusted for each air discharge outlet to prevent uncomfortable drafts and to deliver optimal air distribution.

#### Infrared presence sensor

The sensor detects human presence and adjusts the airflow direction automatically to prevent drafts.

Ceiling height	2.7m	3.5m	4.0m
Detection range (diameter)*1	approx. 8.5m	approx. 11.5m	approx. 13.5m

\*1. The infrared presence sensor detects 80 cm above the floor.

#### Infrared floor sensor


The sensor detects the floor temperature and automatically adjusts operation of the indoor unit to reduce the temperature difference between the ceiling and the floor.

Ceiling height	2.7m	3.5m	4.0m
Detection range (diameter)*2	approx. 11m	approx. 14m	approx. 16m

\*2. The infrared floor sensor detects at the floor surface.

### Sensing function

■ Draft prevention function (default: OFF) \*1.2 (Auto airflow direction mode)

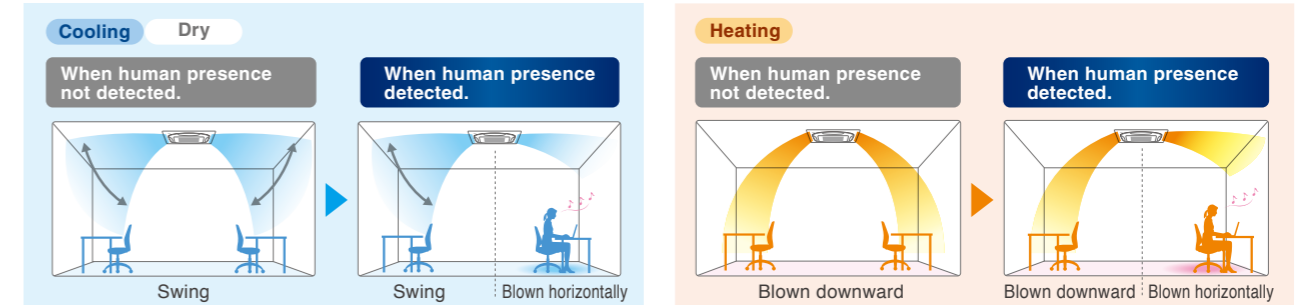


With the Auto airflow direction mode, flaps are controlled to deliver optimal air distribution for both cooling and heating operations when there are no people.


When a person is detected, drafts are prevented by making the flap horizontal.

When a person is not detected for 5 minutes, the unit automatically returns to controlling the flaps for an unoccupied room. \*1. Airflow direction should be set to Auto. \*2. Draft prevention function is OFF in the initial setting. It can be set ON using the remote controller.

■ Comfort and Energy saving preventing over Cooling / Heating \*1.2 (Auto airflow direction mode + Auto airflow rate mode)

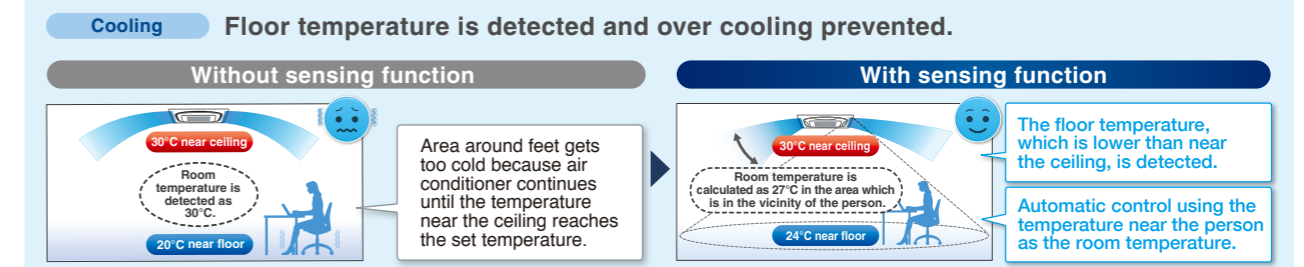

The temperature near the person is automatically calculated by detecting the temperature of the floor. Energy is saved, because the area around the feet does not get too cold.

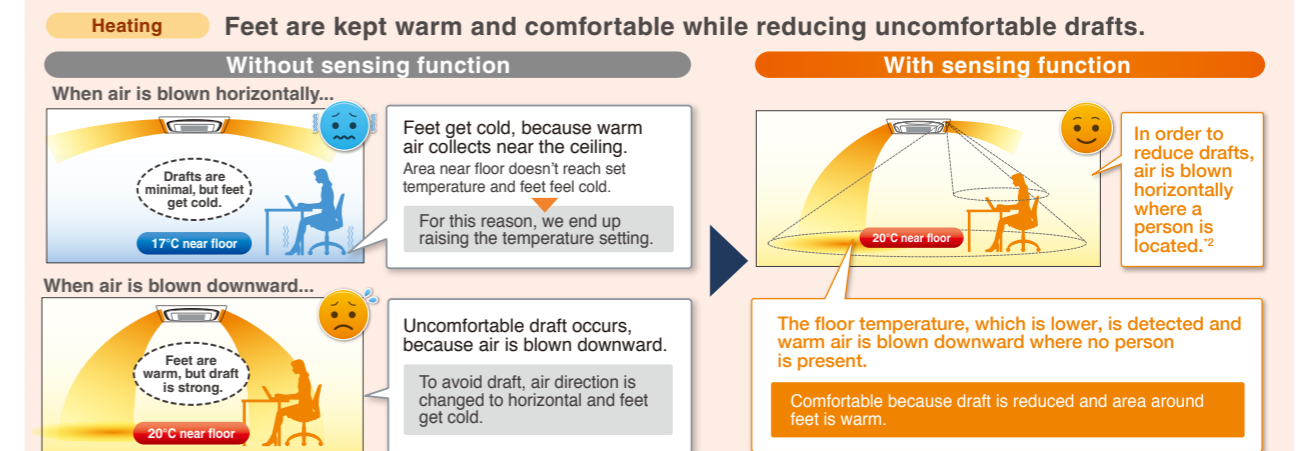

The tendency of people to raise the temperature too much is prevented, because you are warmed up from the feet.

To increase comfort, Auto airflow rate mode controls the airflow in accordance with the difference between floor and ceiling temperatures. When there is a large difference between the ceiling and floor temperatures, the airflow rate is automatically increased. When the difference becomes small, the airflow rate is automatically reduced.

\*1. Both airflow direction and airflow rate should be set to Auto. \*2. Draft prevention function is set OFF in the initial setting.

## VRV Indoor Units

### Ceiling Mounted Cassette (Round Flow with Sensing) Type


#### Sensing sensor mode\*1, 2

##### ■ Sensing sensor low mode (default: OFF)


When there are no people in a room, the set temperature is shifted automatically.

The system automatically saves energy by detecting whether or not the room is occupied. The set temperature is shifted automatically if the room is unoccupied.

Operation is reduced in places where there are no people.

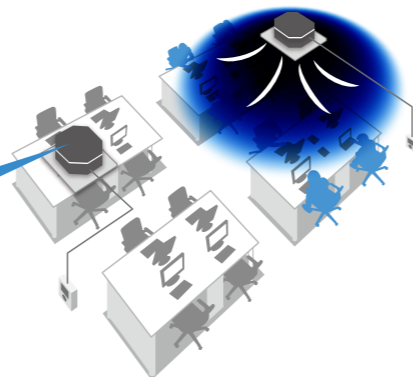


**Example** • Cooling setpoint: 26°C • Shift temperature: 1.0°C  
• Shift time: 30 min. • Limit cooling temperature: 30°C

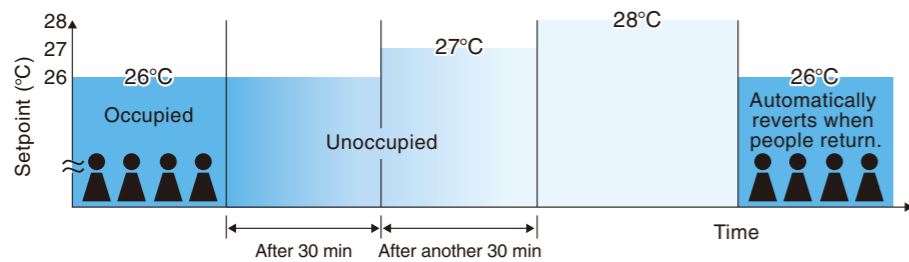

If people do not return, the air conditioner will raise the temperature 1°C every 30 minutes and then operate at 30°C.

**Example** • Heating setpoint: 20°C • Shift temperature: 1.0°C  
• Shift time: 30 min. • Limit heating temperature: 16°C

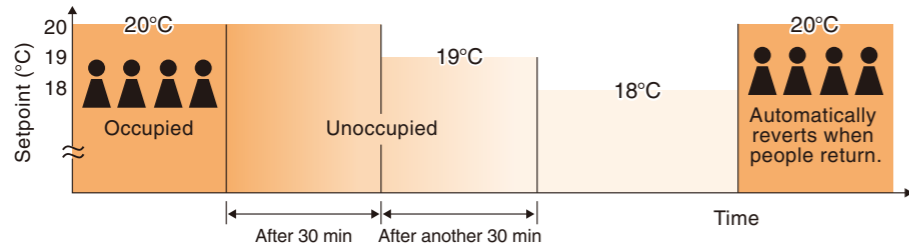

If people do not return, the air conditioner will lower the temperature 1°C every 30 minutes and then operate at 16°C.


Shift temperature and time can be selected from 0.5 to 4°C in 0.5°C increments and 15, 30, 45, 60, 90 or 120 minutes respectively with remote controller.

##### ■ Sensing sensor stop mode (default: OFF)

When there are no people in a room, the system stops automatically.\*3

The system automatically saves energy by detecting whether or not the room is occupied. Based on preset user conditions, the system automatically stops operation if the room is unoccupied.

Absent stop time can be selected from 1 to 24 hrs in 1 hr increments with remote controller.

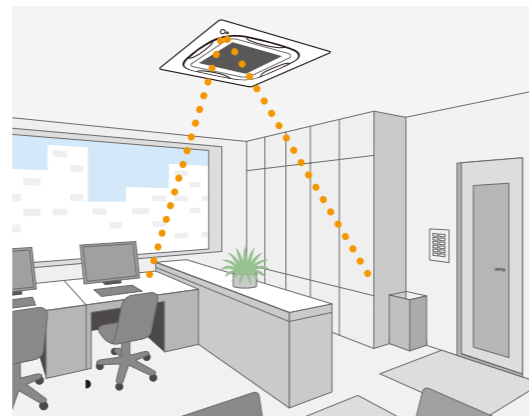

\*1. These functions are not available when using the group control system.

\*2. User can set these functions with remote controller.

\*3. Please note that upon re-entering the room, air conditioner will not switch on automatically.


### Individual airflow direction control

#### ■ Individual airflow setting

Airflow direction of each of the four air outlets can be controlled individually. (Positions 0 to 4, Swing, Blocked, and No individual setting are selectable.)

Individual setting list		
Outletmark	Air direc.	Indiv.
<input type="checkbox"/>	blocked	ON
<input type="checkbox"/>	Auto	OFF
<input type="checkbox"/>	Position 2	ON
<input type="checkbox"/>	Swing	ON
Return		


#### Example

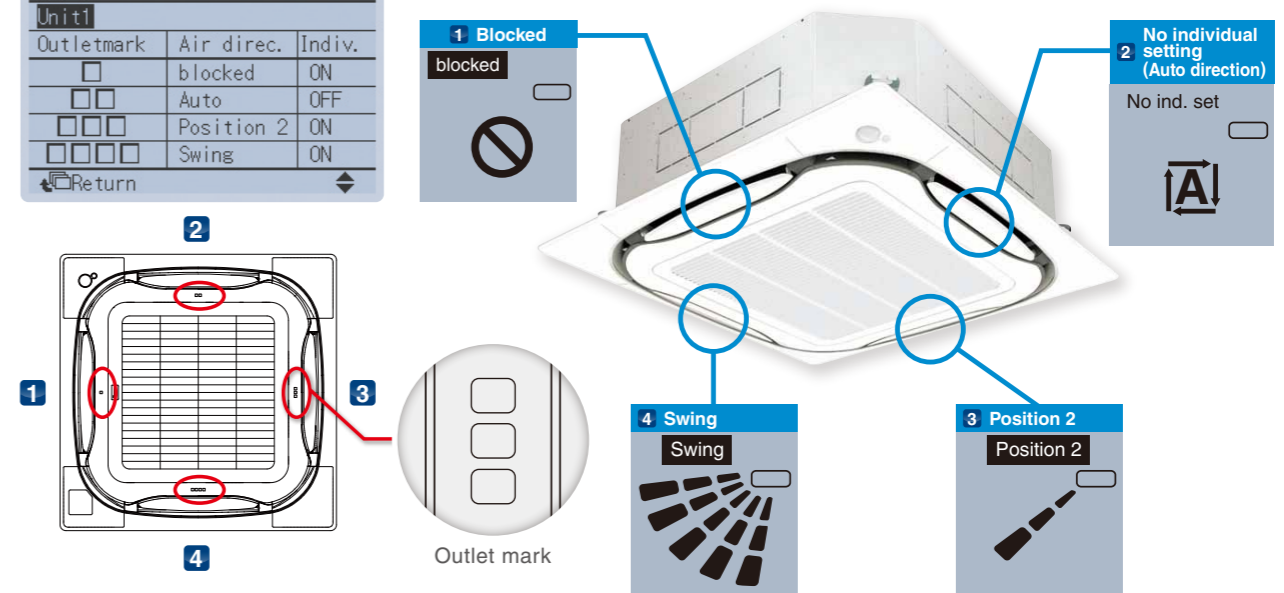

#### ■ Airflow block function\*1



Total comfort by individual airflow direction control and "airflow block function"

- Airflow block function prevents uncomfortable drafts by reducing air velocity. It can be set using the BRC1E62 remote controller. There is no need for sealing material of air discharge outlet (option).
- This function only works when all-round flow is used. It cannot be used when sealing material is used in the air discharge outlet (option).

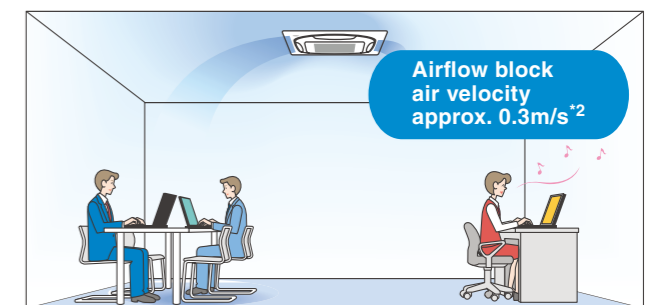


Airflow block function prevents uncomfortable drafts by reducing air velocity to approx. 0.3m/s.\*2

#### Easy setup with remote controller

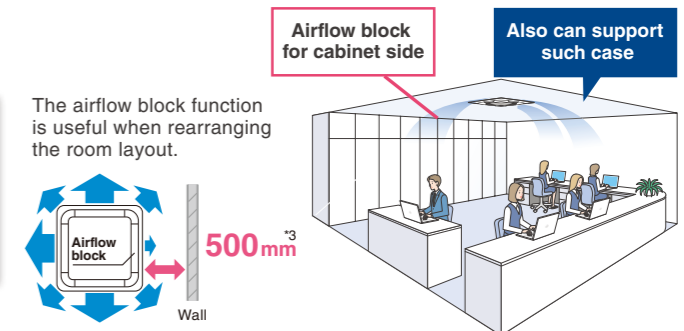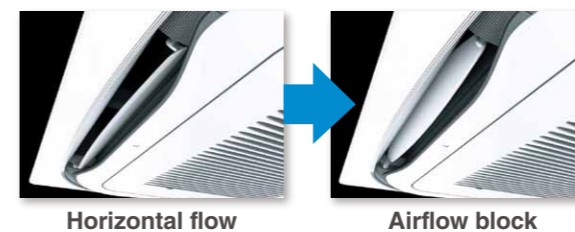

The airflow block function is useful when rearranging the room layout.



\*1. Works in one direction only.

\*2. In case of FXQ63S type (Data is based on Daikin research.) When using FXQ80S type or higher, if the airflow rate is set to High, airflow will be on the high side. Under actual conditions, however, the airflow value may differ depending on the effect of surrounding conditions and the way in which the temperature was adjusted.

\*3. A gap of 1500 mm is required if the air block function is not used.

## VRV Indoor Units


### Ceiling Mounted Cassette (Round Flow) Type

FXFQ25LU / FXFQ32LU / FXFQ40LU  
FXFQ50LU / FXFQ63LU / FXFQ80LU  
FXFQ100LU / FXFQ125LU



### 360° airflow improves temperature distribution and offers a comfortable living environment

- The industry's first\* Round Flow Ceiling Mounted Cassette type offers 360° airflow with improved temperature distribution.

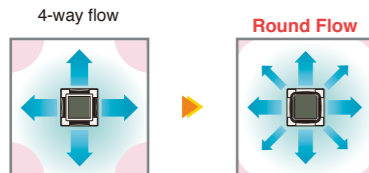


There are areas of uneven temperature.

There are much fewer areas of uneven temperature.

\* As of April 2004, the release date for Japan.

- The light weight unit at 19.5 kg for FXFQ25-50LU models makes installation easy.

- Drain pump is equipped as a standard accessory with a 850 mm lift.



- A modern sophisticated decoration panel has been applied, with a panel surface that has been treated with a dirt-repellant coating.



- Control of the airflow rate can be selected from 3-step control.
- Low operation sound level
- The horizontal louvres prevent dew condensation. Their non-flocking surfaces, which repel dirt, are easy to clean.



- An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours. (The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)



- The air filter has an anti-mould and antibacterial treatment that prevents the growth of mould generated from dust or moisture that may adhere to the filter.

- Example of airflow patterns: All-round flow is available, as well as 2-way to 4-way flows, so you can choose the most suitable airflow pattern depending on location or room layout.



Note: Whatever the discharge direction, the same type of panel is used. If installing for other than all-round flow, an air discharge outlet sealing material (option) must be used to close each unused outlet.

### Ceiling Mounted Cassette (Compact Multi Flow) Type

FXZQ20M / FXZQ25M / FXZQ32M  
FXZQ40M / FXZQ50M



### Quiet, compact, and designed for user comfort

- Dimensions correspond with 600 mm x 600 mm architectural module ceiling design specifications.

- Low operation sound level


FXZQ-M	20/25	32	40	50
Sound level (H/L)	30/25	32/26	36/28	41/33

(230 V)(dB(A))


- Comfortable airflow

- Wide discharge angle: 0° to 60°

- Auto swing

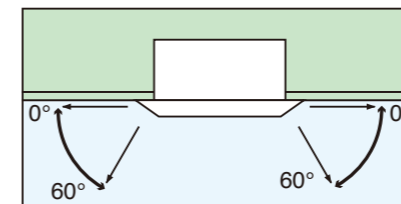


- Fixed angles: 5 levels

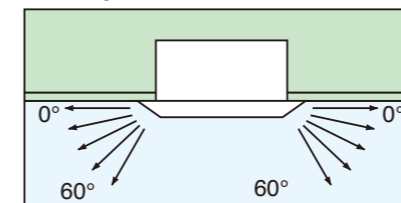


\*Angles can be also set on site to prevent drafts (0°-35°) or soiling of the ceiling (25°-60°), other than standard setting (0°-60°).


- 2-, 3-, and 4-way airflow patterns are available, enabling installation in the corner of a room.

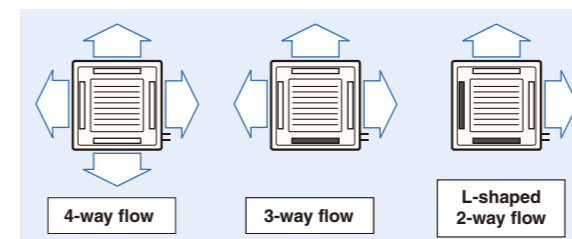

\*For 3-way or 2-way flow installation, the sealing material for air discharge outlet (option) must be used to close each unused outlet.

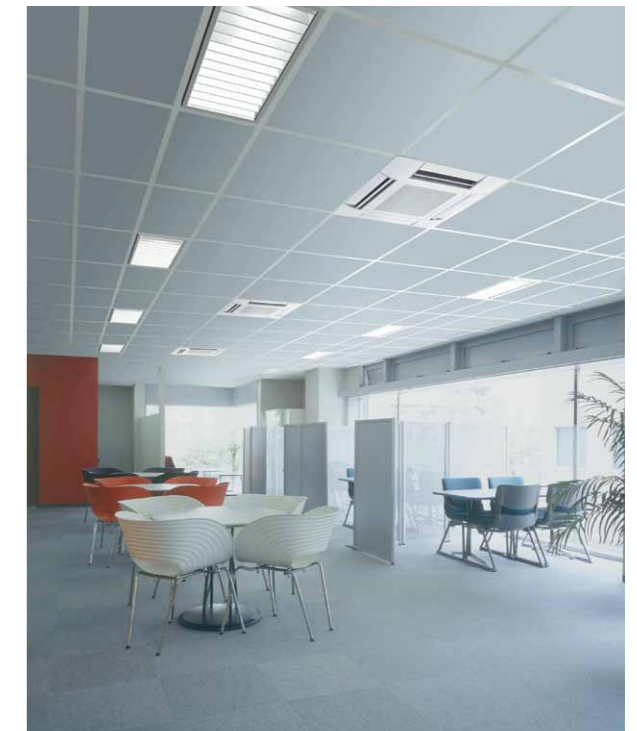

- Drain pump is equipped as standard accessory with 750 mm lift.

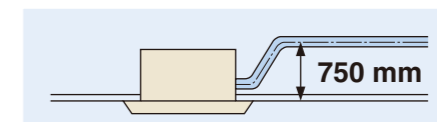

## VRV Indoor Units


### 4-Way Flow Ceiling Suspended Type

FXUQ71A / FXUQ100A




**This slim and stylish indoor unit achieves optimum air distribution, and can be installed without the need for ceiling cavity**



- Unit body and suction panel adopted round shapes and realised a slim appearance design. The unit can be used for various locations such as the ceilings with no cavity and bare ceilings.
- Flaps close automatically when the unit stops, which gives a simple appearance.
- Unified slim height of 198 mm for all models that gives the unified impression even when models with different capacities are installed in the same area.
- Built-in electronic expansion valve eliminates the need for a BEV unit, which improves flexibility of installation.



- Control of the airflow rate has been improved from 2-step to 3-step control. Auto airflow rate control can be selected with wired remote controller BRC1E62.
- Energy efficiency has been improved thanks to the adoption of a new heat exchanger with smaller tubes, DC fan motor and DC drain pump motor.
- Drain pump is equipped as a standard accessory, and the lift height has been improved from 500 mm to 600 mm.
- Depending on installation site requirements or room conditions, 2-way, 3-way and 4-way discharge patterns are available.

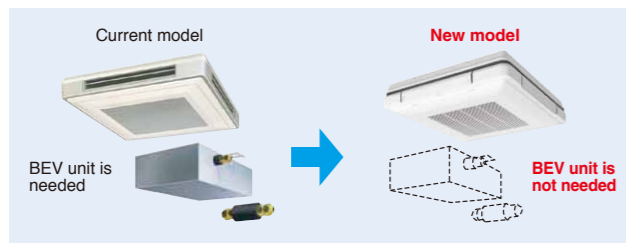

- With adoption of the individual flap control, airflow direction adjustment can be individually set for each air outlet. 5 directions of airflow and auto-swing can be selected with wired remote controller BRC1E62, which realises the optimum air distribution.

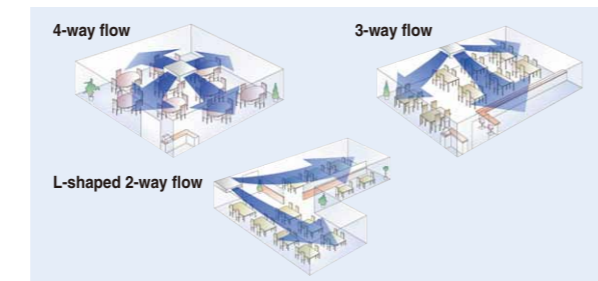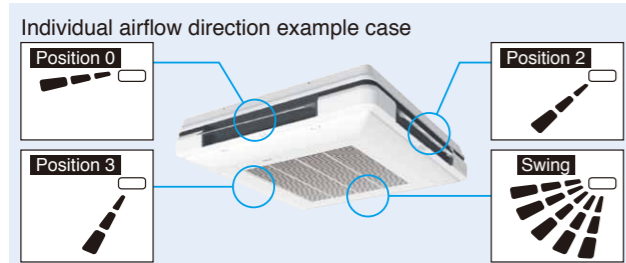

- An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours. (The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)




### Ceiling Mounted Cassette (Double Flow) Type

FXCQ20M / FXCQ25M / FXCQ32M  
FXCQ40M / FXCQ50M / FXCQ63M  
FXCQ80M / FXCQ125M



**Thin, lightweight, and easy to install in narrow ceiling spaces**

- The thin unit (only 305 mm high) can be installed in a ceiling space as narrow as 350 mm. All models feature a compact design with a depth of only 600 mm.

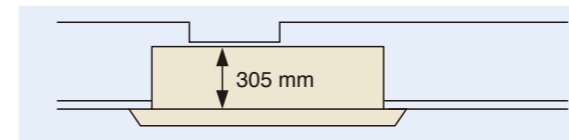

(When a high-efficiency filter is attached, the unit's height is 400 mm.)

- Low operation sound level



FXCQ-M	20	25/32	40/50	63	80	125
Sound level (H/L)	32/27	34/28	34/29	37/32	39/34	44/38

(220 V)(dB(A))

- Designed with higher airflow suitable for high ceiling application up to 3 metres.

- Providing 2 different settings of standard and ceiling soiling prevention, the auto swing mechanism realises even distribution of airflow and room temperature.

- Drain pump is equipped as standard accessory with 600 mm lift.

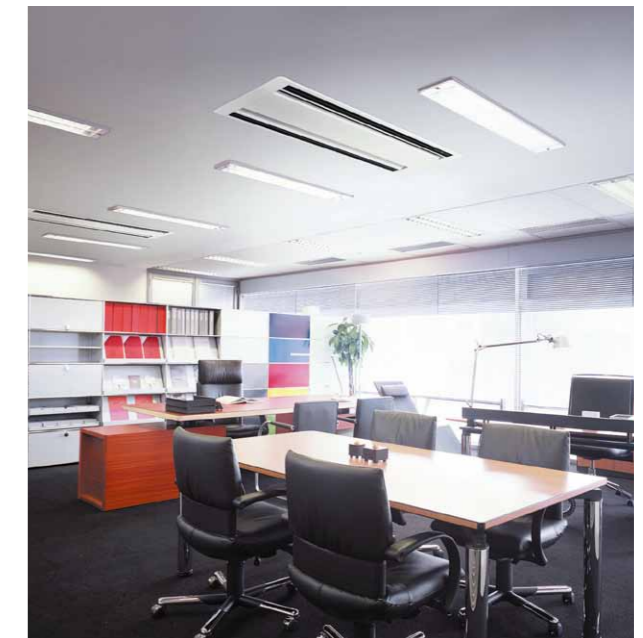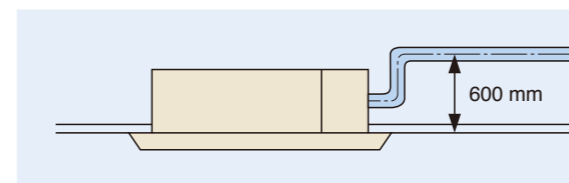

- Two types of optional high-efficiency filter are available (65% and 95%, colourimetric method).

- A long-life filter (maintenance free up to one year\*) is equipped as standard accessory.

\* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m<sup>3</sup>

- Major maintenance work can be performed by removing the panel. A flat-type suction grille and a detachable blade make cleaning easy.



## VRV Indoor Units


### Ceiling Mounted Cassette Corner Type

FXKQ25MA / FXKQ32MA  
FXKQ40MA / FXKQ63MA




### Slim design for flexible installation

- Slim body needs only 220 mm space above the ceiling. If you use a panel spacer (option), the unit can be installed in the minimum space of 195 mm.




- Single-flow type allows effective air discharge from corner or from drop-ceiling.


- Drain pump is equipped as standard accessory with 500 mm lift.

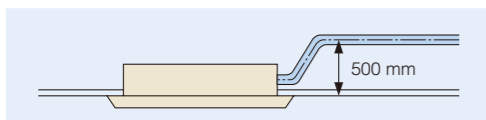


- Providing 3 different settings of standard, draft prevention and ceiling soiling prevention, the auto swing mechanism realises even distribution of airflow and room temperature.

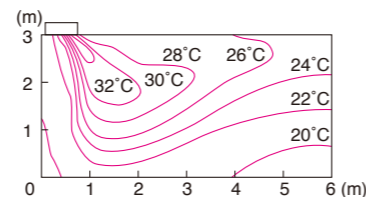

- Front discharge is possible with an air discharge unit (option), which allows the installation in the drop-ceiling or sagging wall.

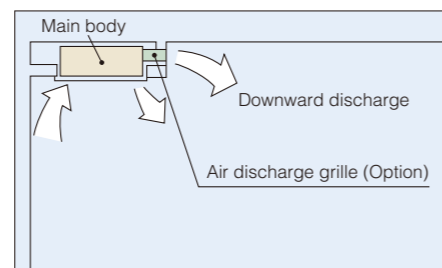

\*Set for front discharge using a suspended ceiling.

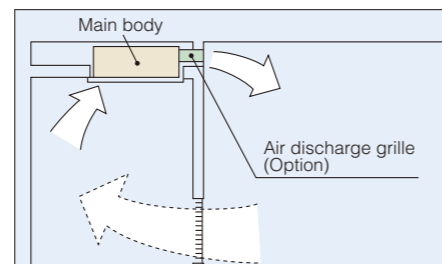

\*Downward discharge is shut off and air is blown straight out (front discharge).

- A long-life filter (maintenance free up to one year\*) is equipped as standard accessory.

\* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m<sup>3</sup>

### Slim Ceiling Mounted Duct Type


### Slim design, quietness and static pressure switching



Suited to use in drop-ceilings!


FXDQ20PB / FXDQ25PB / FXDQ32PB

- Only 700 mm in width and 23 kg in weight, this model is suitable to install in limited spaces like drop-ceilings in hotels.

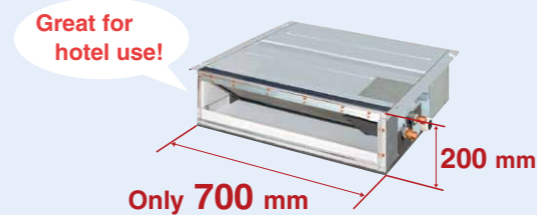


FXDQ40NB / FXDQ50NB / FXDQ63NB

- Only 200 mm in height, this model can be installed in rooms with as little as 240 mm in height for the ceiling space between the drop-ceiling and ceiling slab.

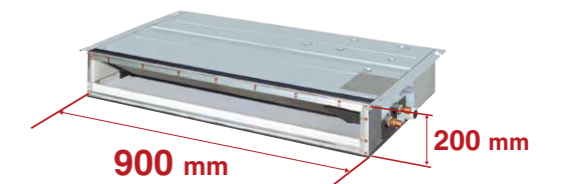

\* 1,100 mm in width for the FXDQ63NB model.

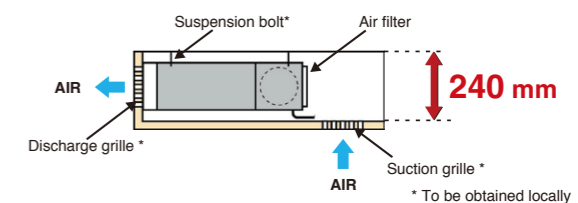


- External static pressure selectable by remote controller switching make this indoor unit a very comfortable and flexible model.

10 Pa-30 Pa/factory set: 10 Pa for FXDQ-PB models.  
15 Pa-44 Pa/factory set: 15 Pa for FXDQ-NB models.

- FXDQ-PB and FXDQ-NB models are available in two types to suit different installation conditions.

FXDQ-PB/NBVE: with a drain pump (750 mm lift) as a standard accessory  
FXDQ-PB/NBVET: without a drain pump



- Control of the airflow rate has been improved from 2-step to 3-step control.

Low operation sound level (dB(A))

Model	20/25	32	40	50	63
Sound level (HH/HL)	28/26/23	28/26/24	30/28/26	33/30/27	33/31/29

\* The values of operation sound level represent those for rear-suction operation. Sound level values for bottom-suction operation can be obtained by adding 5 dB(A).  
\* Values are based on the following conditions:  
FXDQ-PB: external static pressure of 10 Pa; FXDQ-NB: external static pressure of 15 Pa.

## VRV Indoor Units

### Middle Static Pressure Ceiling Mounted Duct Type

New

FXSQ20P / FXSQ25P / FXSQ32P  
FXSQ40P / FXSQ50P / FXSQ63P  
FXSQ80P / FXSQ100P / FXSQ125P  
FXSQ140P




Middle external static pressure and slim design allow flexible installations

### Installation flexibility


#### Slim design

- With a height of only 245 mm, installation is possible even in buildings with narrow ceiling spaces.

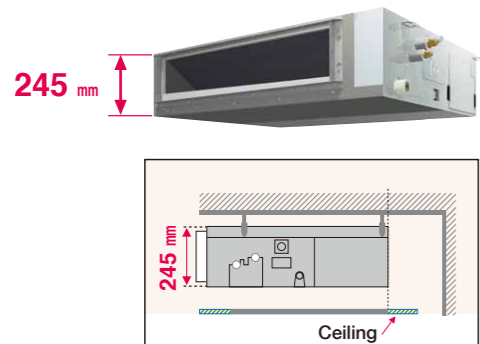


#### Bottom suction possible

- Bottom suction is possible which facilitates installation and maintenance. Wiring connections and maintenance of control box can be done from under the unit with an optional shield plate for side plate\*, extending the degree of freedom for installation in the ceiling.

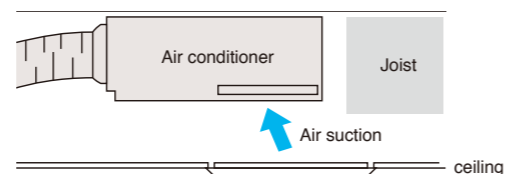


- Air suction direction can be altered from rear to bottom suction.

#### Rear suction

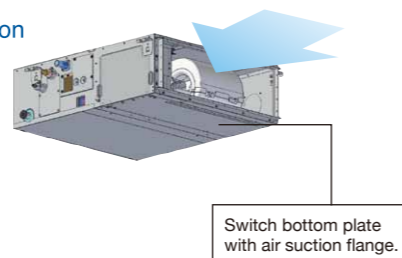


#### Bottom suction

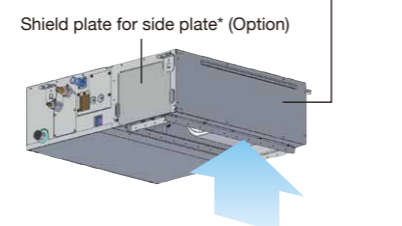

\*An optional shield plate for side plate is required if wiring connections and maintenance of control box are needed from under the unit. This option is only available for FXSQ20-125P models.

#### Standard DC drain pump


- DC drain pump is equipped as standard accessory with 850 mm lift.



### Design flexibility

#### Adjustable external static pressure

- Using a DC fan motor, the external static pressure can be controlled within a range of 30 Pa\* to 150 Pa.

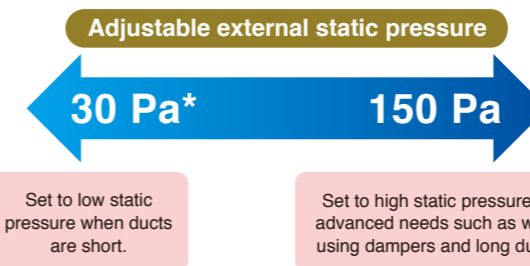

Comfortable airflow is achieved in accordance with conditions such as duct length.

\*30 Pa–150 Pa for FXSQ20-40PVE  
50 Pa–150 Pa for FXSQ50-125PVE  
50 Pa–140 Pa for FXSQ140PVE


### Comfort

#### Switchable airflow rate

- Control of the airflow rate can be selected from 3-step control.


#### Auto airflow rate

- 5-step airflow rate is automatically controlled in accordance with the difference between room temperature and set temperature. Auto airflow rate control can be selected with wired remote controller BRC1E62.



#### Low operation sound level

FXSQ-PVE	20/25	32	40	50	63
Sound level (H/M/L)	33/30/28	34/32/30	36/33/30	34/32/29	36/32/29
FXSQ-PVE	80	100	125	140	
Sound level (H/M/L)	37.5/34/30	39/35/32	42/38.5/35	43/40/36	

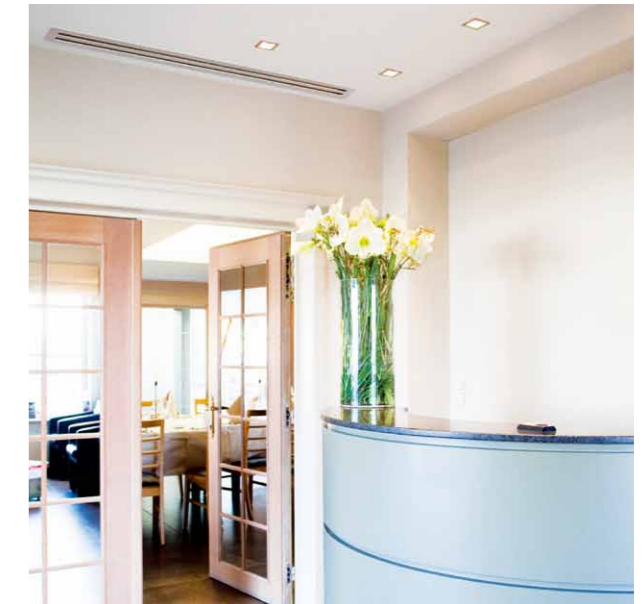


### Easy installation

#### Airflow rate auto adjustment function

- During installation, even if the external static pressure changes due to a change in the duct route, the airflow can be automatically adjusted to within the unit's external static pressure range.
- Airflow rate can be controlled using a remote controller during test operation. It is automatically adjusted to the range between approximately  $\pm 10\%$  of the rated H tap airflow.

### Easy maintenance

- Inspection and cleaning is facilitated by separating the drain pipe and inspection opening and by the drain pan maintenance check hole.

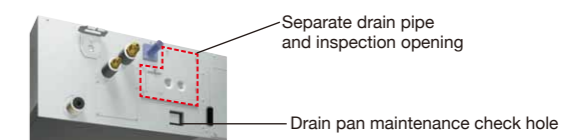

- The drain pan can be detached for easy cleaning. An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.

- An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours. (The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)



## VRV Indoor Units

### Ceiling Mounted Duct Type

FXMQ20P / FXMQ25P / FXMQ32P  
 FXMQ40P / FXMQ50P / FXMQ63P  
 FXMQ80P / FXMQ100P / FXMQ125P  
 FXMQ140P




### Middle and high static pressure allows for flexible duct design

- A DC fan motor increases the external static pressure capacity range to include middle to high static pressures, increasing design flexibility.  
 30 Pa–100 Pa for FXMQ20P–32P  
 30 Pa–160 Pa for FXMQ40P  
 50 Pa–200 Pa for FXMQ50P–125P  
 50 Pa–140 Pa for FXMQ140P

- All models are only 300 mm in height, an improvement over the 390 mm height of conventional models. The weight of the FXMQ40P has been reduced from 44 kg to 28 kg.

- Drain pump is equipped as standard accessory with 700 mm lift.



- Control of the airflow rate has been improved from 2-step to 3-step control.

- Low operation sound level

- Energy-efficient

- The adopted DC fan motor is much more efficient than the conventional AC motor, yielding an approximate 20% decrease in energy consumption (FXMQ125P).

- Improved ease of installation

- Airflow rate can be controlled using a remote controller during test operation. With the conventional model, the airflow rate was controlled from the PC board. It is automatically adjusted to the range between approximately ±10% of the rated HH tap airflow for FXMQ20P–125P.



- Improved ease of maintenance

- The drain pan can be detached for easy cleaning. An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.

- An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours. (The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)



FXMQ200MA / FXMQ250MA




- Simplified Static Pressure Control

External static pressure can be easily adjusted using a change-over switch inside the electrical box to meet the resistance in the duct system.


- Built-in Drain Pump (Option)

Housing the drain pump inside the unit reduces the space required for installation.

- Without drain pump



- With drain pump



### Ceiling Suspended Type


FXHQ32MA / FXHQ63MA  
 FXHQ100MA



### Slim body with quiet and wide airflow

- Adoption of QUIET STREAM FAN

Uses the quiet stream fan and many more advanced technologies.

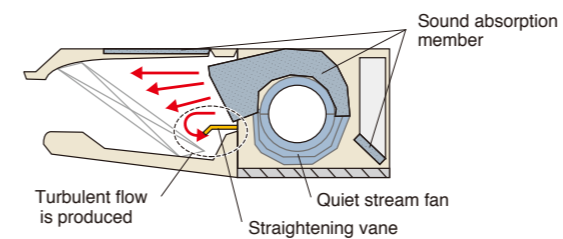


- Low operation sound level


FXHQ-MA	32	63	100
Sound level (H/L)	36/31	39/34	45/37

- Installation is easy

- Drain pump kit (option) can be easily incorporated.

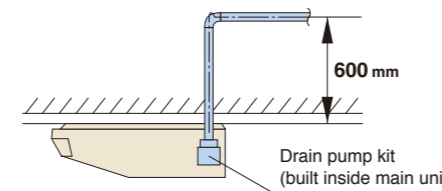


- Wide air discharge openings produce a spreading 100° airflow.



- Maintenance is easy

- Non-dew Flap with no implanted bristles

Bristle-free Flap minimises contamination and makes cleaning simpler.



Non-dew Flap

- Easy-to-clean flat design

- Maintenance is easier because everything can be performed from below the unit.

- A long-life filter (maintenance free up to one year\*) is equipped as standard accessory.

\* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m<sup>3</sup>

## VRV Indoor Units

### Wall Mounted Type

FXAQ20P / FXAQ25P  
FXAQ32P / FXAQ40P  
FXAQ50P / FXAQ63P



### Stylish flat panel design harmonised with your interior décor

- Stylish flat panel design creates a graceful harmony that enhances any interior space.

- Flat panel can be cleaned with only the single pass of a cloth across their smooth surface. Flat panel can also be easily removed and washed for more thorough cleaning.

- Low operation sound level (dB(A))

FXAQ-P	20	25	32	40	50	63
Sound level (H/L)	35/31	36/31	38/31	39/34	42/37	47/41

- Drain pan and air filter can be kept clean by mould-proof polystyrene.

- Vertical auto-swing realises efficiency of air distribution. The louvre closes automatically when the unit stops.


- 5 steps of discharge angle can be set by remote controller.

- Discharge angle is automatically set at the same angle as the previous operation when restarting. (Initial setting: 10° for cooling and 70° for heating)

- Flexible installation
  - Drain pipe can be fitted to from either left or right sides.



- Drain pump kit is available as optional accessory, which lifts the drain 1,000 mm from the bottom of the unit.

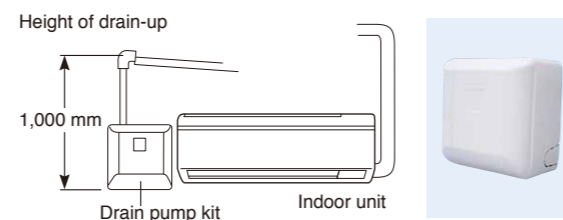

### Floor Standing Type

FXLQ20MA / FXLQ25MA  
FXLQ32MA / FXLQ40MA  
FXLQ50MA / FXLQ63MA




### Suitable for perimeter zone air conditioning

- Floor Standing types can be hung on the wall for easier cleaning. Running the piping from the back allows the unit to be hung on walls. Cleaning under the unit, where dust tends to accumulate, is considerably easier.

- The adoption of a fibre-less discharge grille featuring an original design to prevent condensation also helps prevent staining and makes cleaning easier.

- A long-life filter (maintenance free up to one year\*) is equipped as standard accessory.

\* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m<sup>3</sup>



### Concealed Floor Standing Type

FXNQ20MA / FXNQ25MA  
FXNQ32MA / FXNQ40MA  
FXNQ50MA / FXNQ63MA




### Designed to be concealed in the perimeter skirting-wall

- The unit is concealed in skirting-wall of perimeter, that enables to create high class interior design.

- The connecting port faces downward, greatly facilitating on-site piping work.

- A long-life filter (maintenance free up to one year\*) is equipped as standard accessory.

\* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m<sup>3</sup>



\* Applies also to Floor Standing type (FXLQ-MA).



## Residential Indoor Units with connection to BP units

### Slim Ceiling Mounted Duct Type



<700 mm width type>  
**CDXS25EA / CDXS35EA**  
 <900/1,000 mm width type>  
**FDXS25C / FDXS35C**  
**FDXS50C / FDXS60C**




Standard accessory  
 Note: Remote controllers other than the standard accessory wireless remote controller cannot be used.

### Slim and smooth design suits your shallow ceiling

- Models in the CDXS-EA series are only 700 mm in width and 21 kg in weight, so are easily installed in limited spaces. Just 200 mm in height, all models can be installed in rooms with as little as 240 mm depth between the drop ceiling and ceiling slab, making them ideal for even shallow ceilings.



	CDXS25EA	CDXS35EA	FDXS25C	FDXS35C
Dimensions (H x W x D)	200 x 700 x 620 mm	200 x 900 x 620 mm		
Weight	21 kg		25 kg	
Airflow rate (H)	8.7 m³/min		9.5 m³/min	10 m³/min
External static pressure	30 Pa		40 Pa	

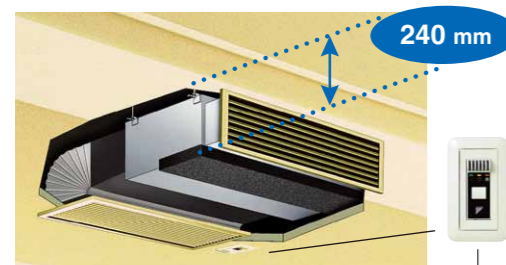


Signals from the wireless remote controller are transmitted to the signal receiver.

- Low operation sound level (H/L/SL)

CDXS25 FDXS25	CDXS35 FDXS35	FDXS50	FDXS60
35/31/29 dB (A)	35/31/29 dB (A)	37/33/31 dB (A)	38/34/32 dB (A)

- Home Leave Operation prevents large rises or falls in the indoor temperature by continuing operation\* while you are sleeping or out of your home. This means that an air-conditioned welcome awaits when you wake or return. It also means that the indoor temperature can quickly return to your favourite comfort setting.

\* Home Leave Operation can be selected for any temperature from 18 to 32°C for cooling operation and 10 to 30°C for heating operation.  
 \* Home Leave Operation function must be set using the remote controller when going to sleep or leaving the house, and after waking up or returning home.

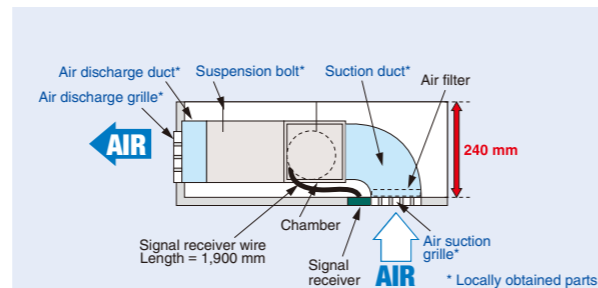

- Note:
- To prevent an increase in operation noise, avoid installing the air suction grille directly below the suction chamber.
  - Grilles, piping connections, ducts, and installation parts should be obtained locally. Slim Ceiling Mounted Duct type models do not have drain-up pumps.
  - The signal receiver unit must be located near the air suction inlet, because the unit includes a sensor that detects room temperature.

### Wall Mounted Type



**FTXS20D / FTXS25E / FTXS35E**



**FTXS50F / FTXS60F / FTXS71F**



\* Remote controllers other than the standard accessory wireless remote controller cannot be used.

### Stylish flat panel harmonises with your interior décor

- Wall Mounted indoor units achieve quiet sound levels of 22 dB (A). (H/L/SL)


FTXS20/25	FTXS35	FTXS50	FTXS60	FTXS71
37/25/22 dB (A)	39/26/23 dB (A)	43/34/31 dB (A)	45/36/33 dB (A)	46/37/34 dB (A)

- Intelligent Eye with its infrared sensor automatically controls air conditioner operation according to human movement in a room. When there is no movement, it adjusts the temperature by 2°C for energy savings.




- 3-D Airflow combines Vertical and Horizontal Auto-Swing to circulate air to every part of a room for uniform cooling of even large spaces.

\* This function is available for FTKS50/60/71F.

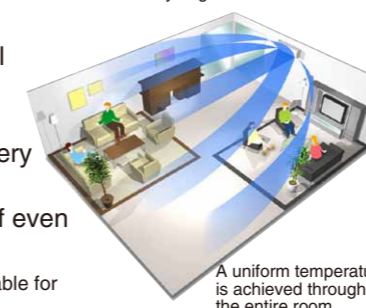

A uniform temperature is achieved throughout the entire room.

- Titanium apatite is a photocatalytic material with high adsorption power. Titanium apatite also effectively adsorbs and decomposes bacteria across its entire surface. The photocatalyst is activated simply by exposure to light.

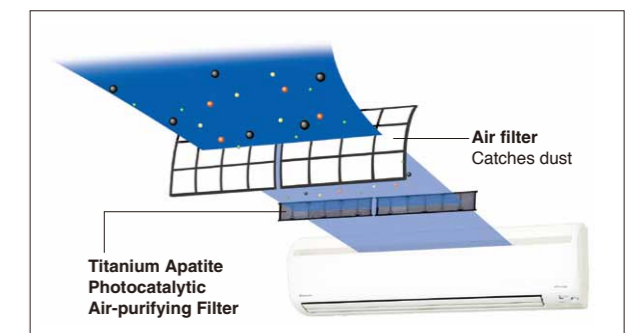

These filters are not medical devices. Benefits such as the adsorption and decomposition of bacteria are only effective for substances that are collected on and in direct contact with the Titanium Apatite Photocatalytic Air-Purifying Filter.

Bacteria Removal Test  
 Testing method: dropping method  
 Result certificate: No. 012553-1 and 012553-2  
 Testing organisation: Japan Spinners Inspecting Foundation



## VRV Indoor Units

### Ceiling Mounted Cassette (Round Flow with Sensing) Type



MODEL		FXFQ25SVM	FXFQ32SVM	FXFQ40SVM	FXFQ50SVM	FXFQ63SVM	FXFQ80SVM	FXFQ100SVM	FXFQ125SVM	
Power supply		1-phase, 220-240 V/220-230 V, 50/60 Hz								
Cooling capacity	kcal/h	2,400	3,100	3,900	4,800	6,100	7,700	9,600	12,000	
	Btu/h	9,600	12,300	15,400	19,100	24,200	30,700	38,200	47,800	
	kW	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	
Heating capacity	kcal/h	2,800	3,400	4,300	5,400	6,900	8,600	10,800	13,800	
	Btu/h	10,900	13,600	17,100	21,500	27,300	34,100	42,700	54,600	
	kW	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	
Power consumption	Cooling	kW	0.031	0.031	0.041	0.080	0.095	0.095	0.194	0.219
	Heating	kW	0.027	0.027	0.037	0.075	0.090	0.090	0.180	0.199
Casing		Galvanised steel plate								
Airflow rate (H/M/L)	m <sup>3</sup> /min	12.5/11.5/10.0	12.5/11.5/10.0	14.5/13.0/11.0	22.0/17.5/13.5	23.5/18.5/13.5	23.5/19.5/15.0	33.0/26.0/19.0	34.5/27.5/21.0	
	cfm	441/406/353	441/406/353	512/459/388	777/618/477	830/653/477	830/688/530	1,165/918/671	1,218/971/741	
Sound level (H/M/L)	dB(A)	30/28.5/27	30/28.5/27	31/29/27	36/32/28	38/33/28	38/35/31	44/38/32	45/40/35	
Dimensions (HxWxD)	mm	246x840x840						288x840x840		
Machine weight	kg	19			23			26		
Piping connections	Liquid (Flare)	φ6.4			φ9.5					
	Gas (Flare)	φ12.7			φ15.9					
	Drain	VP25 (External Dia, 32/Internal Dia, 25)								
	Model	BYCQ125B-W1								
Panel (Option)	Colour	Fresh white								
	Dimensions(HxWxD)	50x950x950								
	Weight	5.5								

### Ceiling Mounted Cassette (Round Flow) Type



MODEL		FXFQ25LUV1	FXFQ32LUV1	FXFQ40LUV1	FXFQ50LUV1	FXFQ63LUV1	FXFQ80LUV1	FXFQ100LUV1	FXFQ125LUV1	
Power supply		1-phase, 220-240 V, 50 Hz								
Cooling capacity	kcal/h	2,400	3,100	3,900	4,800	6,100	7,700	9,600	12,000	
	Btu/h	9,600	12,300	15,400	19,100	24,200	30,700	38,200	47,800	
	kW	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	
Heating capacity	kcal/h	2,800	3,400	4,300	5,400	6,900	8,600	10,800	13,800	
	Btu/h	10,900	13,600	17,100	21,500	27,300	34,100	42,700	54,600	
	kW	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	
Power consumption	Cooling	kW	0.033	0.033	0.047	0.052	0.066	0.093	0.187	0.209
	Heating	kW	0.027	0.027	0.034	0.038	0.053	0.075	0.174	0.200
Casing		Galvanised steel plate								
Airflow rate (HH/H/L)	m <sup>3</sup> /min	13/11.5/10	13/11.5/10	15/13/11	16/13.5/11	19/16.5/13.5	21/18/15	32/26/20	33/28/22.5	
	cfm	459/406/353	459/406/353	530/459/388	565/477/388	671/583/477	742/636/530	1,130/918/706	1,165/989/794	
Sound level (HH/H/L)	dB(A)	30/28.5/27	30/28.5/27	31/29/27	32/29.5/27	34/31/28	36/33.5/31	43/37.5/32	44/39/34	
Dimensions (HxWxD)	mm	246x840x840						288x840x840		
Machine weight	kg	19.5			22			25		
Piping connections	Liquid (Flare)	φ6.4			φ9.5					
	Gas (Flare)	φ12.7			φ15.9					
	Drain	VP25 (External Dia, 32/Internal Dia, 25)								
	Model	BYCP125K-W1								
Panel (Option)	Colour	Fresh white								
	Dimensions(HxWxD)	50x950x950								
	Weight	5.5								

Note: Specifications are based on the following conditions:  
 •Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.  
 •Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.  
 •Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.  
 (See Engineering Data Book for details.)  
 •Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.  
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

### Ceiling Mounted Cassette (Compact Multi Flow) Type



MODEL		FXZQ20MVE	FXZQ25MVE	FXZQ32MVE	FXZQ40MVE	FXZQ50MVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz				
Cooling capacity	kcal/h	1,900	2,400	3,100	3,900	4,800
	Btu/h	7,500	9,600	12,300	15,400	19,100
	kW	2.2	2.8	3.6	4.5	5.6
Heating capacity	kcal/h	2,200	2,800	3,400	4,300	5,400
	Btu/h	8,500	10,900	13,600	17,100	21,500
	kW	2.5	3.2	4.0	5.0	6.3
Power consumption	Cooling	kW	0.073		0.076	0.115
	Heating	kW	0.064		0.068	0.107
Casing		Galvanised steel plate				
Airflow rate (H/L)	m <sup>3</sup> /min	9/7		9.5/7.5	11/8	14/10
	cfm	318/247		335/265	388/282	493/353
Sound level (H/L)	230 V, 50 Hz-240 V, 50 Hz	dB(A)		30/25-32/26	32/26-34/28	36/28-37/29
Dimensions (HxWxD)	mm	286x575x575				
Machine weight	kg	18				
Piping connections	Liquid (Flare)	φ6.4				
	Gas (Flare)	φ12.7				
	Drain	VP20 (External Dia, 26/Internal Dia, 20)				
Panel (Option)	Model	BYFQ60B3W1				
	Colour	White (6.5Y9.5/0.5)				
	Dimensions(HxWxD)	55x700x700				
	Weight	2.7				

### 4-Way Flow Ceiling Suspended Type



MODEL		FXUQ71AVEB	FXUQ100AVEB
Power supply		1-phase, 220-240 V/220-230 V, 50/60 Hz	
Cooling capacity	kcal/h	6,900	9,600
	Btu/h	27,300	38,200
	kW	8.0	11.2
Heating capacity	kcal/h	7,700	10,800
	Btu/h	30,700	42,700
	kW	9.0	12.5
Power consumption	Cooling	kW	0.090
	Heating	kW	0.179
Casing		Fresh white	
Airflow rate (H/M/L)	m <sup>3</sup> /min	22.5/19.5/16	31/26/21
	cfm	794/688/565	1,094/918/741
Sound level (H/M/L)	dB(A)	40/38/36	47/44/40
Dimensions (HxWxD)	mm	198x950x950	
Machine weight	kg	26	27
Piping connections	Liquid (Flare)	φ9.5	
	Gas (Flare)	φ15.9	
	Drain	VP20 (External Dia, 26/Internal Dia, 20)	

Note: Specifications are based on the following conditions:  
 •Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.  
 •Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.  
 •Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.  
 (See Engineering Data Book for details.)  
 •Sound level: (FXZQ-M) Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit center.  
 (FXUQ-A) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward.  
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## VRV Indoor Units

### Ceiling Mounted Cassette (Double Flow) Type



MODEL		FXCQ20MVE	FXCQ25MVE	FXCQ32MVE	FXCQ40MVE	FXCQ50MVE	FXCQ63MVE	FXCQ80MVE	FXCQ125MVE	
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz								
Cooling capacity	kcal/h	1,900	2,400	3,100	3,900	4,800	6,100	7,700	12,000	
	Btu/h	7,500	9,600	12,300	15,400	19,100	24,200	30,700	47,800	
	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	14.0	
Heating capacity	kcal/h	2,200	2,800	3,400	4,300	5,400	6,900	8,600	13,800	
	Btu/h	8,500	10,900	13,600	17,100	21,500	27,300	34,100	54,600	
	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	16.0	
Power consumption	Cooling	kW	0.077	0.092	0.092	0.130	0.130	0.161	0.209	0.256
	Heating	kW	0.044	0.059	0.059	0.097	0.097	0.126	0.176	0.223
Casing		Galvanised steel plate								
Airflow rate (H/L)	m <sup>3</sup> /min	7/5	9/6.5	9/6.5	12/9	12/9	16.5/13	26/21	33/25	
	cfm	247/177	318/230	318/230	424/318	424/318	582/459	918/741	1,165/883	
Sound level (H/L)	220 V	dB(A)	32/27	34/28	34/28	34/29	34/29	37/32	39/34	44/38
	240 V	dB(A)	34/29	36/30	36/30	37/32	37/32	39/34	41/36	46/40
Dimensions (HxWxD)	mm	305x775x600	305x775x600	305x775x600	305x990x600	305x990x600	305x1,175x600	305x1,665x600	305x1,665x600	
Machine weight	kg	26.0	26.0	26.0	31.0	32.0	35.0	47.0	48.0	
Piping connections	Liquid (Flare)	mm	φ 6.4	φ 6.4	φ 6.4	φ 6.4	φ 6.4	φ 9.5	φ 9.5	φ 9.5
	Gas (Flare)	mm	φ 12.7	φ 12.7	φ 12.7	φ 12.7	φ 12.7	φ 15.9	φ 15.9	φ 15.9
	Drain	VP25 (External Dia, 32/Internal Dia, 25)								
Panel (Option)	Model	BYBC32G-W1			BYBC50G-W1			BYBC63G-W1		BYBC125G-W1
	Colour	White (10Y9/0.5)								
	Dimensions(HxWxD)	mm	53x1,030x680	53x1,030x680	53x1,030x680	53x1,245x680	53x1,245x680	53x1,430x680	53x1,920x680	53x1,920x680
	Weight	kg	8.0	8.0	8.0	8.5	8.5	9.5	12.0	12.0

### Ceiling Mounted Cassette Corner Type




MODEL		FXKQ25MAVE	FXKQ32MAVE	FXKQ40MAVE	FXKQ63MAVE	
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz				
Cooling capacity	kcal/h	2,400	3,100	3,900	6,100	
	Btu/h	9,600	12,300	15,400	24,200	
	kW	2.8	3.6	4.5	7.1	
Heating capacity	kcal/h	2,800	3,400	4,300	6,900	
	Btu/h	10,900	13,600	17,100	27,300	
	kW	3.2	4.0	5.0	8.0	
Power consumption	Cooling	kW	0.066	0.066	0.076	0.105
	Heating	kW	0.046	0.046	0.056	0.085
Casing		Galvanised steel plate				
Airflow rate (H/L)	m <sup>3</sup> /min	11/9	11/9	13/10	18/15	
	cfm	388/318	388/318	459/353	635/530	
Sound level (H/L)	220 V	dB(A)	38/33	38/33	40/34	42/37
	240 V	dB(A)	40/35	40/35	42/36	44/39
Dimensions (HxWxD)	mm	215x1,110x710	215x1,110x710	215x1,110x710	215x1,310x710	
Machine weight	kg	31	31	31	34	
Piping connections	Liquid (Flare)	mm	φ 6.4	φ 6.4	φ 6.4	φ 9.5
	Gas (Flare)	mm	φ 12.7	φ 12.7	φ 12.7	φ 15.9
	Drain	VP25 (External Dia, 32/Internal Dia, 25)				
Panel (Option)	Model	BYK45FJW1			BYK71FJW1	
	Colour	White (10Y9/0.5)				
	Dimensions(HxWxD)	mm	70x1,240x800	70x1,240x800	70x1,240x800	70x1,440x800
	Weight	kg	8.5	8.5	8.5	9.5

Note: Specifications are based on the following conditions:


- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- Sound level: (FXCQ-M) Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. (FXKQ-MA) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward. During actual operation, these values are normally somewhat higher as a result of ambient conditions

### Slim Ceiling Mounted Duct Type



700 mm width type

MODEL	with drain pump	FXDQ20PBVE	FXDQ25PBVE	FXDQ32PBVE	
	without drain pump	FXDQ20PBVET	FXDQ25PBVET	FXDQ32PBVET	
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz			
Cooling capacity	kcal/h	1,900	2,400	3,100	
	Btu/h	7,500	9,600	12,300	
	kW	2.2	2.8	3.6	
Heating capacity	kcal/h	2,200	2,800	3,400	
	Btu/h	8,500	10,900	13,600	
	kW	2.5	3.2	4.0	
Power consumption (FXDQ-PBVE)*1	Cooling	kW	0.086	0.086	0.089
	Heating	kW	0.067	0.067	0.070
Power consumption (FXDQ-PBVET)*1	Cooling	kW	0.067	0.067	0.070
	Heating	kW	0.067	0.067	0.070
Casing		Galvanised steel plate			
Airflow rate (HH/H/L)	m <sup>3</sup> /min	8.0/7.2/6.4	8.0/7.2/6.4	8.0/7.2/6.4	
	cfm	282/254/226	282/254/226	282/254/226	
External static pressure	Pa	30-10*2			
Sound level (HH/H/L)*1*3	dB(A)	28/26/23		28/26/24	
Dimensions (HxWxD)	mm	200x700x620	200x700x620	200x700x620	
Machine weight	kg	23.0	23.0	23.0	
Piping connections	Liquid (Flare)	mm	φ 6.4	φ 6.4	φ 6.4
	Gas (Flare)	mm	φ 12.7	φ 12.7	φ 12.7
	Drain	VP20 (External Dia, 26/Internal Dia, 20)			



900/1,100 mm width type

MODEL	with drain pump	FXDQ40NBVE	FXDQ50NBVE	FXDQ63NBVE	
	without drain pump	FXDQ40NBVET	FXDQ50NBVET	FXDQ63NBVET	
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz			
Cooling capacity	kcal/h	3,900	4,800	6,100	
	Btu/h	15,400	19,100	24,200	
	kW	4.5	5.6	7.1	
Heating capacity	kcal/h	4,300	5,400	6,900	
	Btu/h	17,100	21,500	27,300	
	kW	5.0	6.3	8.0	
Power consumption (FXDQ-PBVE)*1	Cooling	kW	0.160	0.165	0.181
	Heating	kW	0.147	0.152	0.168
Power consumption (FXDQ-PBVET)*1	Cooling	kW	0.147	0.152	0.168
	Heating	kW	0.147	0.152	0.168
Casing		Galvanised steel plate			
Airflow rate (HH/H/L)	m <sup>3</sup> /min	10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0	
	cfm	371/335/300	441/388/353	583/512/459	
External static pressure	Pa	44-15*2			
Sound level (HH/H/L)*1*3	dB(A)	30/28/26	33/30/27	33/31/29	
Dimensions (HxWxD)	mm	200x900x620	200x900x620	200x1,100x620	
Machine weight	kg	27.0	28.0	31.0	
Piping connections	Liquid (Flare)	mm	φ 6.4	φ 6.4	φ 9.5
	Gas (Flare)	mm	φ 12.7	φ 12.7	φ 15.9
	Drain	VP20 (External Dia, 26/Internal Dia, 20)			

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- \*1 : Values are based on the following conditions: FXDQ-PB: external static pressure of 10 Pa; FXDQ-NB: external static pressure of 15 Pa.
- \*2 : External static pressure is changeable to set by the remote controller. This pressure means "High static pressure - Standard". (Factory setting is 10 Pa for FXDQ-PB models and 15 Pa for FXDQ-NB models.)
- \*3 : The values of operation sound level represent those for rear-suction operation. Sound level values for bottom-suction operation can be obtained by adding 5 dB(A).

## VRV Indoor Units

### Middle Static Pressure Ceiling Mounted Duct Type



MODEL		FXSQ20PVE	FXSQ25PVE	FXSQ32PVE	FXSQ40PVE	FXSQ50PVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz				
Cooling capacity	kcal/h	1,900	2,400	3,100	3,900	4,800
	Btu/h	7,500	9,600	12,300	15,400	19,100
	kW	2.2	2.8	3.6	4.5	5.6
Heating capacity	kcal/h	2,200	2,800	3,400	4,300	5,400
	Btu/h	8,500	10,900	13,600	17,100	21,500
	kW	2.5	3.2	4.0	5.0	6.3
Power consumption	Cooling	kW 0.058 *1		0.066 *1	0.101 *1	0.075 *1
	Heating	kW 0.053 *1		0.061 *1	0.096 *1	0.070 *1
Casing		Galvanised steel plate				
Airflow rate (H/M/L)	m <sup>3</sup> /min	9/7.5/6.5	9/7.5/6.5	9.5/8/7	15/12.5/10.5	17/14.5/11.5
	cfm	318/265/230	318/265/230	335/282/247	530/441/371	600/512/406
External static pressure	Pa	30-150 (50)*2				50-150 (50)*2
Sound level (H/M/L)	dB(A)	33/30/28		34/32/30	36/33/30	34/32/29
Dimensions (HxWxD)	mm	245X550X800			245X700X800	245X1,000X800
Machine weight	kg	25			27	35
Piping connections	Liquid (Flare)	φ 6.4				
	Gas (Flare)	φ 12.7				
	Drain	VP25 (External Dia, 32/Internal Dia, 25)				

MODEL		FXSQ63PVE	FXSQ80PVE	FXSQ100PVE	FXSQ125PVE	FXSQ140PVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz				
Cooling capacity	kcal/h	6,100	7,700	9,600	12,000	13,800
	Btu/h	24,200	30,700	38,200	47,800	54,600
	kW	7.1	9.0	11.2	14.0	16.0
Heating capacity	kcal/h	6,900	8,600	10,800	13,800	15,500
	Btu/h	27,300	34,100	42,700	54,600	61,400
	kW	8.0	10.0	12.5	16.0	18.0
Power consumption	Cooling	kW 0.106 *1	0.126 *1	0.151 *1	0.206 *1	0.222 *1
	Heating	kW 0.101 *1	0.121 *1	0.146 *1	0.201 *1	0.217 *1
Casing		Galvanised steel plate				
Airflow rate (H/M/L)	m <sup>3</sup> /min	21/17.5/14.5	23/19.5/16	32/27/22.5	37/31.5/26	39/33.5/28
	cfm	741/618/512	812/688/565	1,130/953/794	1,306/1,112/918	1,377/1,183/988
External static pressure	Pa	50-150 (50)*2				50-140 (50)*2
Sound level (H/M/L)	dB(A)	36/32/29	37.5/34/30	39/35/32	42/38.5/35	43/40/36
Dimensions (HxWxD)	mm	245X1,000X800		245X1,400X800		245X1,550X800
Machine weight	kg	35	37	46	47	52
Piping connections	Liquid (Flare)	φ 9.5				
	Gas (Flare)	φ 15.9				
	Drain	VP25 (External Dia, 32/Internal Dia, 25)				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

- \*1: Power consumption value is the value when airflow rate is maximum at maximum external static pressure position.
- \*2: External static pressure can be modified using a remote controller that offers thirteen (FXSQ20-40P), eleven (FXSQ50-125P) or ten (FXSQ140P) levels of control. These values indicate the lowest and highest possible external static pressures. The rated external static pressure is 50 Pa.

### Ceiling Mounted Duct Type



MODEL		FXMQ20PVE	FXMQ25PVE	FXMQ32PVE	FXMQ40PVE	FXMQ50PVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz				
Cooling capacity	kcal/h	1,900	2,400	3,100	3,900	4,800
	Btu/h	7,500	9,600	12,300	15,400	19,100
	kW	2.2	2.8	3.6	4.5	5.6
Heating capacity	kcal/h	2,200	2,800	3,400	4,300	5,400
	Btu/h	8,500	10,900	13,600	17,100	21,500
	kW	2.5	3.2	4.0	5.0	6.3
Power consumption	Cooling	kW 0.056 *1	0.056 *1	0.060 *1	0.151 *1	0.128 *1
	Heating	kW 0.044 *1	0.044 *1	0.048 *1	0.139 *1	0.116 *1
Casing		Galvanised steel plate				
Airflow rate (HH/H/L)	m <sup>3</sup> /min	9/7.5/6.5	9/7.5/6.5	9.5/8/7	16/13/11	18/16.5/15
	cfm	318/265/230	318/265/230	335/282/247	565/459/388	635/582/530
External static pressure	Pa	30-100 (50)*2		30-100 (50)*2	30-160 (100)*2	50-200 (100)*2
Sound level (HH/H/L)	dB(A)	33/31/29		33/31/29	34/32/30	39/37/35
Dimensions (HxWxD)	mm	300X550X700	300X550X700	300X550X700	300X700X700	300X1,000X700
Machine weight	kg	25	25	25	28	36
Piping connections	Liquid (Flare)	φ 6.4				
	Gas (Flare)	φ 12.7				
	Drain	VP25 (External Dia, 32/Internal Dia, 25)				

MODEL		FXMQ63PVE	FXMQ80PVE	FXMQ100PVE	FXMQ125PVE	FXMQ140PVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz				
Cooling capacity	kcal/h	6,100	7,700	9,600	12,000	13,800
	Btu/h	24,200	30,700	38,200	47,800	54,600
	kW	7.1	9.0	11.2	14.0	16.0
Heating capacity	kcal/h	6,900	8,600	10,800	13,800	15,500
	Btu/h	27,300	34,100	42,700	54,600	61,400
	kW	8.0	10.0	12.5	16.0	18.0
Power consumption	Cooling	kW 0.138 *1	0.185 *1	0.215 *1	0.284 *1	0.405 *1
	Heating	kW 0.127 *1	0.173 *1	0.203 *1	0.272 *1	0.380 *1
Casing		Galvanised steel plate				
Airflow rate (HH/H/L)	m <sup>3</sup> /min	19.5/17.5/16	25/22.5/20	32/27/23	39/33/28	46/39/32
	cfm	688/618/565	883/794/706	1,130/953/812	1,377/1,165/988	1,624/1,377/1,130
External static pressure	Pa	50-200 (100)*2		50-200 (100)*2	50-200 (100)*2	50-140 (100)*2
Sound level (HH/H/L)	dB(A)	42/40/38	43/41/39	43/41/39	44/42/40	46/45/43
Dimensions (HxWxD)	mm	300X1,000X700	300X1,000X700	300X1,400X700	300X1,400X700	300X1,400X700
Machine weight	kg	36	36	46	46	47
Piping connections	Liquid (Flare)	φ 9.5				
	Gas (Flare)	φ 15.9				
	Drain	VP25 (External Dia, 32/Internal Dia, 25)				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

- \*1: Power consumption values are based on conditions of rated external static pressure.
- \*2: External static pressure can be modified using a remote controller that offers seven (FXMQ20-32P), thirteen (FXMQ40P), fourteen (FXMQ50-125P) or ten (FXMQ140P) levels of control. These values indicate the lowest and highest possible external static pressures. The standard external static pressure is 50 Pa for FXMQ20-32P and 100 Pa for FXMQ40-140P.



## VRV Indoor Units

### Ceiling Mounted Duct Type



MODEL		FXMQ200MAVE	FXMQ250MAVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz	
Cooling capacity	kcal/h	19,300	24,100
	Btu/h	76,400	95,500
	kW	22.4	28.0
Heating capacity	kcal/h	21,500	27,100
	Btu/h	85,300	107,500
	kW	25.0	31.5
Power consumption	Cooling kW	1.294 *1	1.465 *1
	Heating kW	1.294 *1	1.465 *1
Casing		Galvanised steel plate	
Airflow rate (H/L)	m <sup>3</sup> /min	58/50	72/62
	cfm	2,047/1,765	2,542/2,189
External static pressure	Pa	132-221*2	191-270*2
Sound level(H/L)	220 V	48/45	48/45
	240 V		
Dimensions (HxWxD)	mm	470x1,380x1,100	470x1,380x1,100
	Machine weight	kg	137
Piping connections	Liquid (Flare)	φ 9.5	φ 9.5
	Gas (Brazing)	φ 19.1	φ 22.2
	Drain	PS1B	

### Ceiling Suspended Type



MODEL		FXHQ32MAVE	FXHQ63MAVE	FXHQ100MAVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz		
Cooling capacity	kcal/h	3,100	6,100	9,600
	Btu/h	12,300	24,200	38,200
	kW	3.6	7.1	11.2
Heating capacity	kcal/h	3,400	6,900	10,800
	Btu/h	13,600	27,300	42,700
	kW	4.0	8.0	12.5
Power consumption	Cooling kW	0.111	0.115	0.135
	Heating kW	0.111	0.115	0.135
Casing		White (10Y9/0.5)		
Airflow rate (H/L)	m <sup>3</sup> /min	12/10	17.5/14	25/19.5
	cfm	424/353	618/494	883/688
Sound level (H/L)	dB(A)	36/31	39/34	45/37
Dimensions (HxWxD)	mm	195x960x680	195x1,160x680	195x1,400x680
Machine weight	kg	24.0	28.0	33.0
Piping connections	Liquid (Flare)	φ 6.4	φ 9.5	φ 9.5
	Gas (Flare)	φ 12.7	φ 15.9	φ 15.9
	Drain	VP20 (External Dia, 26/Internal Dia, 20)		

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- Sound level: (FXMQ-M) Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. (FXHQ-MA) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward. During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- \*1: Power consumption values are based on conditions of standard external static pressure.
- \*2: External static pressure is changeable to change over the connectors inside electrical box, this pressure means "Standard-High static pressure".

### Wall Mounted Type



MODEL		FXAQ20PVE	FXAQ25PVE	FXAQ32PVE	FXAQ40PVE	FXAQ50PVE	FXAQ63PVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz					
Cooling capacity	kcal/h	1,900	2,400	3,100	3,900	4,800	6,100
	Btu/h	7,500	9,600	12,300	15,400	19,100	24,200
	kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity	kcal/h	2,200	2,800	3,400	4,300	5,400	6,900
	Btu/h	8,500	10,900	13,600	17,100	21,500	27,300
	kW	2.5	3.2	4.0	5.0	6.3	8.0
Power consumption	Cooling kW	0.019	0.028	0.030	0.020	0.033	0.050
	Heating kW	0.029	0.034	0.035	0.020	0.039	0.060
Casing		White (3.0Y8.5/0.5)					
Airflow rate (H/L)	m <sup>3</sup> /min	7.5/4.5	8/5	8.5/5.5	12/9	15/12	19/14
	cfm	265/159	282/177	300/194	424/318	530/424	671/494
Sound level (H/L)	dB(A)	35/31	36/31	38/31	39/34	42/37	47/41
Dimensions (HxWxD)	mm	290x795x238	290x795x238	290x795x238	290x1,050x238	290x1,050x238	290x1,050x238
Machine weight	kg	11.0	11.0	11.0	14.0	14.0	14.0
Piping connections	Liquid (Flare)	φ 6.4	φ 6.4	φ 6.4	φ 6.4	φ 6.4	φ 9.5
	Gas (Flare)	φ 12.7	φ 12.7	φ 12.7	φ 12.7	φ 12.7	φ 15.9
	Drain	VP13 (External Dia, 18/Internal Dia, 13)					

### Floor Standing Type/Concealed Floor Standing Type



MODEL		FXLQ20MAVE	FXLQ25MAVE	FXLQ32MAVE	FXLQ40MAVE	FXLQ50MAVE	FXLQ63MAVE
		FXNQ20MAVE	FXNQ25MAVE	FXNQ32MAVE	FXNQ40MAVE	FXNQ50MAVE	FXNQ63MAVE
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz					
Cooling capacity	kcal/h	1,900	2,400	3,100	3,900	4,800	6,100
	Btu/h	7,500	9,600	12,300	15,400	19,100	24,200
	kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity	kcal/h	2,200	2,800	3,400	4,300	5,400	6,900
	Btu/h	8,500	10,900	13,600	17,100	21,500	27,300
	kW	2.5	3.2	4.0	5.0	6.3	8.0
Power consumption	Cooling kW	0.049	0.049	0.090	0.090	0.110	0.110
	Heating kW	0.049	0.049	0.090	0.090	0.110	0.110
Casing		FXLQ: Ivory white (5Y7.5/1)/FXNQ: Galvanised steel plate					
Airflow rate (H/L)	m <sup>3</sup> /min	7/6	7/6	8/6	11/8.5	14/11	16/12
	cfm	247/212	247/212	282/212	388/300	494/388	565/424
Sound level (H/L)	220 V	35/32	35/32	35/32	38/33	39/34	40/35
	240 V						
Dimensions (HxWxD)	FXLQ	600x1,000x222	600x1,000x222	600x1,140x222	600x1,140x222	600x1,420x222	600x1,420x222
	FXNQ	610x930x220	610x930x220	610x1,070x220	610x1,070x220	610x1,350x220	610x1,350x220
Machine weight	FXLQ	25.0	25.0	30.0	30.0	36.0	36.0
	FXNQ	19.0	19.0	23.0	23.0	27.0	27.0
Piping connections	Liquid (Flare)	φ 6.4	φ 6.4	φ 6.4	φ 6.4	φ 6.4	φ 9.5
	Gas (Flare)	φ 12.7	φ 12.7	φ 12.7	φ 12.7	φ 12.7	φ 15.9
	Drain	210.D.					

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- Sound level: (FXAQ-P) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward. (FXLQ-MA, FXNQ-MA) Anechoic chamber conversion value, measured at a point 1.5 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Residential indoor units with connection to BP units

### Slim Ceiling Mounted Duct Type



MODEL		CDXS25EAVMA	CDXS35EAVMA	FDXS25CVMA	FDXS35CVMA	FDXS50CVMA	FDXS60CVMA
Power supply		1-phase, 220-240 V/220-230 V, 50/60 Hz					
Airflow rates (H)	m <sup>3</sup> /min (cfm)	8.7 (307)	9.5 (335)	10.0 (353)	12.0 (424)	16.0 (565)	
Sound levels (H/L/SL)*	dB (A)	35/31/29			37/33/31	38/34/32	
Fan speed		5 steps, quiet and automatic					
Temperature control		Microcomputer control					
Dimensions (HxWxD)	mm	200x700x620		200x900x620		200x1,100x620	
Machine weight	kg	21	25	27	30		
Piping connections	Liquid (Flare)	φ6.4					
	Gas (Flare)	φ9.5			φ12.7		
	Drain	VP20 (External Dia. 26/Internal Dia. 20)					
Heat insulation		Both liquid and gas pipes					
External static pressure	Pa	30			40		

Note: \* The operation sound level values represent those for rear-suction operation and an external static pressure of 30 Pa for CDXS-EA and 40 Pa for FDXS-C. Sound level values for bottom-suction operation can be obtained by adding 6 dB (A) for CDXS-EA and 5 dB (A) for FDXS-C.

### Wall Mounted Type



MODEL		FTXS20DVMA	FTXS25EVMA	FTXS35EVMA	FTXS50FVMA	FTXS60FVMA	FTXS71FVMA
Power supply		1-phase, 220-240 V/220-230 V, 50/60 Hz					
Front panel colour		White					
Airflow rates (H)	Cooling	8.7 (307)	8.9 (314)	14.7 (519)	16.2 (572)	17.4 (614)	17.4 (614)
	Heating	9.4 (332)	9.7 (342)	16.2 (572)	17.4 (614)	21.5 (759)	21.5 (759)
Sound levels (H/L/SL)	Cooling	37/25/22	39/26/23	43/34/31	45/36/33	46/37/34	
	Heating	37/28/25	38/29/26	42/33/30	44/35/32	46/37/34	
Fan speed		5 steps, quiet and automatic					
Temperature control		Microcomputer control					
Dimensions (HxWxD)	mm	283x800x195			290x1,050x238		
Machine weight	kg	9			12		
Piping connections	Liquid (Flare)	φ6.4					
	Gas (Flare)	φ9.5		φ12.7		φ15.9	
	Drain	φ18.0					
Heat insulation		Both liquid and gas pipes					

### BP Units for connection to residential indoor units



MODEL		BPMKS967A3	BPMKS967A2		
Power supply		1-phase, 220-240 V/220-230 V, 50/60 Hz			
Number of ports		3 (connectable to 1-3 indoor units)	2 (connectable to 1-2 indoor units)		
Power consumption	W	10			
Running current	A	0.05			
Dimensions (HxWxD)	mm	180x294 (+356*)x350			
Machine weight	kg	8	7.5		
Number of wiring connections		3 for power supply (including earth wiring), 2 for interunit wiring (outside unit-BP, BP-BP), 4 for interunit wiring (BP-indoor unit)			
Piping connections (Brazeing)	Liquid	Main	mm	φ9.5x1	
		Branch	mm	φ6.4x3	φ6.4x2
	Gas	Main	mm	φ19.1x1	
		Branch	mm	φ15.9x3	φ15.9x2
Heat insulation		Both liquid and gas pipes			
Connectable indoor units		2.0 kW class to 7.1 kW class residential indoor units			
Min. rated capacity of connectable indoor units	kW	2.0			
Max. rated capacity of connectable indoor units	kW	20.8	14.2		

Note: \* Total auxiliary piping length.

## Outdoor Units

## Heat Pump

### High-COP Type

MODEL			RXYQ12TAHY1(E)	RXYQ14TAHY1(E)	RXYQ16TAHY1(E)	RXYQ18TAHY1(E)	RXYQ20TAHY1(E)	RXYQ22TAHY1(E)	RXYQ24TAHY1(E)	RXYQ26TAHY1(E)	RXYQ28TAHY1(E)	RXYQ30TAHY1(E)	RXYQ32TAHY1(E)	RXYQ34TAHY1(E)	RXYQ36TAHY1(E)	RXYQ38TAHY1(E)	RXYQ40TAHY1(E)	
Combination units			RXYQ6TAY1(E)	RXYQ6TAY1(E)	RXYQ8TAY1(E)	RXYQ6TAY1(E)	RXYQ6TAY1(E)	RXYQ6TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)	
			RXYQ6TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ6TAY1(E)	RXYQ6TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ8TAY1(E)	RXYQ10TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)	RXYQ14TAY1(E)	RXYQ12TAY1(E)	RXYQ14TAY1(E)	
Power supply			3-phase 4-wire system, 380-415 V, 50 Hz								3-phase 4-wire system, 380-415 V, 50 Hz							
Cooling capacity	kcal/h		27,500	33,000	38,500	41,300	46,800	52,300	57,800	62,600	67,300	72,200	76,900	82,500	87,700	92,000	98,000	
	Btu/h		109,000	131,000	153,000	164,000	186,000	207,000	229,000	248,000	267,000	286,000	305,000	327,000	348,000	365,000	389,000	
	kW		32.0	38.4	44.8	48.0	54.4	60.8	67.2	72.8	78.3	83.9	89.4	95.9	102	107	114	
Heating capacity	kcal/h		31,000	37,000	43,000	46,400	52,500	58,500	64,500	70,100	75,300	80,800	86,000	92,900	98,900	103,000	110,000	
	Btu/h		123,000	147,000	171,000	184,000	208,000	232,000	256,000	278,000	299,000	321,000	341,000	368,000	392,000	409,000	437,000	
	kW		36.0	43.0	50.0	54.0	61.0	68.0	75.0	81.5	87.5	94.0	100	108	115	120	128	
Power consumption	Cooling	kW	7.26	8.81	10.4	10.9	12.4	14.0	15.5	17.2	19.2	20.9	22.8	24.7	26.6	28.3	30.2	
	Heating	kW	7.98	9.68	11.4	12.0	13.7	15.4	17.1	18.7	20.4	22.0	23.8	25.9	27.9	29.2	31.3	
Capacity control		%	10-100	10-100	10-100	7-100	7-100	7-100	7-100	6-100	6-100	5-100	5-100	5-100	4-100	4-100	4-100	
Casing colour			Ivory white (5Y7.5/1)								Ivory white (5Y7.5/1)							
Compressor	Type		Hermetically Sealed Scroll Type								Hermetically Sealed Scroll Type							
	Motor output	kW	(2.4X1)+ (2.4X1)	(2.4X1)+ (3.4X1)	(3.4X1)+ (3.4X1)	(2.4X1)+ (2.4X1)	(2.4X1)+ (2.4X1)	(2.4X1)+ (3.4X1)	(3.4X1)+ (3.4X1)	(3.4X1)+ (3.4X1)	(3.4X1)+ (3.4X1)	(3.4X1)+ (3.4X1)	(3.4X1)+ (4.1X1)	(3.4X1)+ (5.2X1)	(3.4X1)+ (5.2X1)	(3.4X1)+(2.9X1)+ (3.3X1)+(2.9X1)+ (3.3X1)	(5.2X1)+(5.2X1)+ (2.9X1)+(3.3X1)	(5.2X1)+(2.9X1)+ (3.3X1)+(2.9X1)+ (3.3X1)
Airflow rate		m <sup>3</sup> /min	119+119	119+157	157+157	119+119+119	119+119+157	119+157+157	157+157+157	157+157+165	157+157+178	157+165+178	157+178+178	157+178+233	157+233+233	178+178+233	178+233+233	
Dimensions (HxWxD)		mm	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x930x765)	(1,657x930x765)+ (1,657x1,240x765)	(1,657x930x765)+ (1,657x1,240x765)	(1,657x930x765)+ (1,657x1,240x765)	(1,657x930x765)+ (1,657x1,240x765)	
Machine weight		kg	185+185	185+185	185+185	185+185+185	185+185+185	185+185+185	185+185+185	185+185+195	185+185+195	185+195+195	185+195+195	185+195+285	185+285+285	195+195+285	195+285+285	
Sound level		dB(A)	58	59	59	60	60	60	61	61	62	62	63	63	64	64	64	
Operation range	Cooling	°CDB	-5 to 49								-5 to 49							
	Heating	°CWB	-20 to 15.5								-20 to 15.5							
Refrigerant	Type		R-410A								R-410A							
	Charge	kg	5.9+5.9	5.9+5.9	5.9+5.9	5.9+5.9+5.9	5.9+5.9+5.9	5.9+5.9+5.9	5.9+5.9+5.9	5.9+5.9+6.0	5.9+5.9+6.3	5.9+6.0+6.3	5.9+6.3+6.3	5.9+6.3+10.3	5.9+10.3+10.3	6.3+6.3+10.3	6.3+10.3+10.3	
Piping connections	Liquid	mm	φ12.7 (Brazing)	φ12.7 (Brazing)	φ12.7 (Brazing)	φ15.9 (Brazing)	φ15.9 (Brazing)	φ15.9 (Brazing)	φ15.9 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	
	Gas	mm	φ28.6 (Brazing)	φ28.6 (Brazing)	φ28.6 (Brazing)	φ28.6 (Brazing)	φ28.6 (Brazing)	φ28.6 (Brazing)	φ34.9 (Brazing)	φ34.9 (Brazing)	φ34.9 (Brazing)	φ34.9 (Brazing)	φ34.9 (Brazing)	φ34.9 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)	

Note: 1. Models with (E) feature components treated for heat and rust corrosion resistance, such as external panels, fan motor, and electric component box, in addition to the fins of the heat exchanger. These models are designed specifically for use in areas which are subject to salt damage and atmospheric pollution. Please contact Daikin for more information.

2. Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## Heat Pump

### High-COP Type



MODEL		RXYQ42TAHY1(E)	RXYQ44TAHY1(E)	RXYQ46TAHY1(E)	RXYQ48TAHY1(E)	RXYQ50TAHY1(E)
Combination units		RXYQ14TAY1(E)	RXYQ14TAY1(E)	RXYQ14TAY1(E)	RXYQ16TAY1(E)	RXYQ16TAY1(E)
Power supply		3-phase 4-wire system, 380-415 V, 50 Hz				
Cooling capacity	kcal/h	103,000	108,000	112,000	116,000	120,000
	Btu/h	409,000	427,000	444,000	461,000	478,000
	kW	120	125	130	135	140
Heating capacity	kcal/h	116,000	120,000	125,000	129,000	134,000
	Btu/h	461,000	478,000	495,000	512,000	532,000
	kW	135	140	145	150	156
Power consumption	Cooling kW	32.1	34.4	36.7	39.0	41.4
	Heating kW	33.3	35.0	36.7	38.4	40.7
Capacity control	%	4-100	3-100	3-100	3-100	3-100
Casing colour	Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type				
	Motor output kW	(2.9X1)+(3.3X1)+ (2.9X1)+(3.3X1)+ (2.9X1)+(3.3X1)	(2.9X1)+(3.3X1)+ (2.9X1)+(3.3X1)+ (3.6X1)+(3.7X1)	(2.9X1)+(3.3X1)+ (3.6X1)+(3.7X1)+ (3.6X1)+(3.7X1)	(3.6X1)+(3.7X1)+ (3.6X1)+(3.7X1)+ (3.6X1)+(3.7X1)	(3.6X1)+(3.7X1)+ (3.6X1)+(3.7X1)+ (4.4X1)+(4.0X1)
Airflow rate	m <sup>3</sup> /min	233+233+233	233+233+233	233+233+233	233+233+233	233+233+233
Dimensions (HxWxD)	mm	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)
Machine weight	kg	285+285+285	285+285+285	285+285+285	285+285+285	285+285+300
Sound level	dB(A)	65	65	65	66	66
Operation range	Cooling °CDB	-5 to 49				
	Heating °CWB	-20 to 15.5				
Refrigerant	Type	R-410A				
	Charge kg	10.3+10.3+10.3	10.3+10.3+10.4	10.3+10.4+10.4	10.4+10.4+10.4	10.4+10.4+11.7
Piping connections	Liquid mm	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)
	Gas mm	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)

Note: 1. Models with (E) feature components treated for heat and rust corrosion resistance, such as external panels, fan motor, and electric component box, in addition to the fins of the heat exchanger. These models are designed specifically for use in areas which are subject to salt damage and atmospheric pollution. Please contact Daikin for more information.

2. Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

### Standard Type



MODEL		RXYQ6TAY1(E)	RXYQ8TAY1(E)	RXYQ10TAY1(E)	RXYQ12TAY1(E)	RXYQ14TAY1(E)	RXYQ16TAY1(E)
Combination units		—	—	—	—	—	—
Power supply		3-phase 4-wire system, 380-415 V, 50 Hz					
Cooling capacity	kcal/h	13,800	19,300	24,100	28,800	34,400	38,700
	Btu/h	54,600	76,400	95,500	114,000	136,000	154,000
	kW	16.0	22.4	28.0	33.5	40.0	45.0
Heating capacity	kcal/h	15,500	21,500	27,100	32,300	38,700	43,000
	Btu/h	61,400	85,300	107,000	128,000	154,000	171,000
	kW	18.0	25.0	31.5	37.5	45.0	50.0
Power consumption	Cooling kW	3.63	5.18	6.88	8.82	10.7	13.0
	Heating kW	3.99	5.69	7.29	9.06	11.1	12.8
Capacity control	%	20-100	20-100	16-100	15-100	11-100	10-100
Casing colour	Ivory white (5Y7.5/1)						
Compressor	Type	Hermetically Sealed Scroll Type					
	Motor output kW	2.4X1	3.4X1	4.1X1	5.2X1	(2.9X1)+(3.3X1)	(3.6X1)+(3.7X1)
Airflow rate	m <sup>3</sup> /min	119	157	165	178	233	233
Dimensions (HxWxD)	mm	1,657X930X765	1,657X930X765	1,657X930X765	1,657X930X765	1,657X1,240X765	1,657X1,240X765
Machine weight	kg	185	185	195	195	285	285
Sound level	dB(A)	55	56	57	59	60	61
Operation range	Cooling °CDB	-5 to 49					
	Heating °CWB	-20 to 15.5					
Refrigerant	Type	R-410A					
	Charge kg	5.9	5.9	6.0	6.3	10.3	10.4
Piping connections	Liquid mm	φ9.5 (Brazing)			φ12.7 (Brazing)		
	Gas mm	φ19.1 (Brazing)		φ22.2 (Brazing)		φ28.6 (Brazing)	

Note: 1. Models with (E) feature components treated for heat and rust corrosion resistance, such as external panels, fan motor, and electric component box, in addition to the fins of the heat exchanger. These models are designed specifically for use in areas which are subject to salt damage and atmospheric pollution. Please contact Daikin for more information.













2. Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## Heat Pump

### Standard Type


																																																																																						
MODEL			RXYQ18TANY1(E) RXYQ20TANY1(E) RXYQ22TANY1(E) RXYQ24TANY1(E) RXYQ26TANY1(E) RXYQ28TANY1(E) RXYQ30TANY1(E)							RXYQ32TANY1(E) RXYQ34TANY1(E) RXYQ36TANY1(E) RXYQ38TANY1(E) RXYQ40TANY1(E) RXYQ42TANY1(E) RXYQ44TANY1(E) RXYQ46TANY1(E)																																																																												
Combination units			RXYQ8TAY1(E) RXYQ8TAY1(E) RXYQ8TAY1(E) RXYQ10TAY1(E) RXYQ12TAY1(E) RXYQ14TAY1(E) RXYQ14TAY1(E)							RXYQ14TAY1(E) RXYQ10TAY1(E) RXYQ12TAY1(E) RXYQ8TAY1(E) RXYQ12TAY1(E) RXYQ12TAY1(E) RXYQ12TAY1(E) RXYQ14TAY1(E) RXYQ16TAY1(E) RXYQ14TAY1(E)																																																																												
Power supply			3-phase 4-wire system, 380-415 V, 50 Hz														3-phase 4-wire system, 380-415 V, 50 Hz																																																																					
Cooling capacity			kcal/h	43,300	48,100	53,700	58,500	63,200	68,800	73,100	77,400	81,700	86,900	91,200	96,300	102,000	107,000	112,000																																																																				
			Btu/h	172,000	191,000	213,000	232,000	251,000	273,000	290,000	307,000	324,000	345,000	362,000	382,000	406,000	423,000	444,000																																																																				
			kW	50.4	55.9	62.4	68.0	73.5	80.0	85.0	90.0	95.0	101	106	112	119	124	130																																																																				
Heating capacity			kcal/h	48,600	53,800	60,200	65,800	71,000	77,400	81,700	86,900	92,000	97,200	102,000	108,000	114,000	119,000	126,000																																																																				
			Btu/h	193,000	213,000	239,000	261,000	281,000	307,000	324,000	345,000	365,000	386,000	406,000	427,000	454,000	471,000	498,000																																																																				
			kW	56.5	62.5	70.0	76.5	82.5	90.0	95.0	101	107	113	119	125	133	138	146																																																																				
Power consumption			Cooling	kW 12.1 14.0 15.9 17.6 19.5 21.4 23.7							kW 26.1 24.5 26.5 29.4 30.6 32.5 34.8 36.8																																																																											
			Heating	kW 13.0 14.8 16.8 18.4 20.2 22.2 23.9							kW 26.2 25.4 27.2 29.9 30.9 33.0 34.7 37.3																																																																											
Capacity control			%							%																																																																												
Casing colour			Ivory white (5Y7.5/1)																																																																																			
Compressor			Hermetically Sealed Scroll Type																																																																																			
Type			Hermetically Sealed Scroll Type																																																																																			
Motor output			kW (3.4X1)+(4.1X1) (3.4X1)+(5.2X1) (3.4X1)+(2.9X1)+(3.3X1) (4.1X1)+(2.9X1)+(3.3X1) (5.2X1)+(2.9X1)+(3.3X1) (2.9X1)+(3.3X1)+(2.9X1)+(3.3X1) (2.9X1)+(3.3X1)+(3.6X1)+(3.7X1) (2.9X1)+(3.3X1)+(4.4X1)+(4.0X1) (4.1X1)+(5.2X1)+(5.2X1) (5.2X1)+(5.2X1)+(3.4X1)+(5.2X1)+(3.6X1)+(3.7X1) (5.2X1)+(5.2X1)+(3.3X1)+(3.6X1)+(3.7X1) (5.2X1)+(2.9X1)+(3.7X1) (5.2X1)+(3.6X1)+(3.7X1) (2.9X1)+(3.3X1)+(4.4X1)+(4.0X1)																																																																																			
Airflow rate			m <sup>3</sup> /min 157+165 157+178 157+233 165+233 178+233 233+233 233+233							m <sup>3</sup> /min 233+233 165+178+178 178+178+178 157+178+233 178+178+233 178+233+233 178+233+233 233+233+233																																																																												
Dimensions (HxWxD)			mm (1,657x930x765)+(1,657x930x765) (1,657x930x765)+(1,657x930x765) (1,657x930x765)+(1,657x1,240x765) (1,657x930x765)+(1,657x1,240x765) (1,657x930x765)+(1,657x1,240x765) (1,657x1,240x765)+(1,657x1,240x765) (1,657x1,240x765)+(1,657x1,240x765)							mm (1,657x1,240x765)+(1,657x1,240x765) (1,657x930x765)+(1,657x930x765) (1,657x930x765)+(1,657x930x765) (1,657x930x765)+(1,657x1,240x765) (1,657x930x765)+(1,657x1,240x765) (1,657x1,240x765)+(1,657x1,240x765) (1,657x1,240x765)+(1,657x1,240x765) (1,657x1,240x765)+(1,657x1,240x765)																																																																												
Machine weight			kg 185+195 185+195 185+285 195+285 195+285 285+285 285+285							kg 285+300 195+195+195 195+195+195 185+195+300 195+195+285 195+285+285 195+285+285 285+285+300																																																																												
Sound level			dB(A) 60 61 61 62 63 63 64							dB(A) 64 63 64 64 65 65 65 66																																																																												
Operation range			Cooling	°CDB -5 to 49																																																																																		
			Heating	°CWB -20 to 15.5																																																																																		
Refrigerant			Type R-410A																																																																																			
Charge			kg 5.9+6.0 5.9+6.3 5.9+10.3 6.0+10.3 6.3+10.3 10.3+10.3 10.3+10.4 10.3+11.7 6.0+6.3+6.3 6.3+6.3+6.3 5.9+6.3+11.7 6.3+6.3+10.4 6.3+10.3+10.4 6.3+10.4+10.4 10.3+10.3+11.7																																																																																			
Piping connections			Liquid	mm φ15.9 (Brazing) φ15.9 (Brazing) φ15.9 (Brazing) φ15.9 (Brazing) φ19.1 (Brazing) φ19.1 (Brazing) φ19.1 (Brazing)							mm φ19.1 (Brazing) φ19.1 (Brazing) φ19.1 (Brazing) φ19.1 (Brazing) φ19.1 (Brazing) φ19.1 (Brazing) φ19.1 (Brazing)																																																																											
			Gas	mm φ28.6 (Brazing) φ28.6 (Brazing) φ28.6 (Brazing) φ34.9 (Brazing) φ34.9 (Brazing) φ34.9 (Brazing) φ34.9 (Brazing)							mm φ34.9 (Brazing) φ34.9 (Brazing) φ41.3 (Brazing) φ41.3 (Brazing) φ41.3 (Brazing) φ41.3 (Brazing) φ41.3 (Brazing)																																																																											

Note: 1. Models with (E) feature components treated for heat and rust corrosion resistance, such as external panels, fan motor, and electric component box, in addition to the fins of the heat exchanger. These models are designed specifically for use in areas which are subject to salt damage and atmospheric pollution. Please contact Daikin for more information.  
 2. Specifications are based on the following conditions:  
 •Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.  
 •Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.  
 •Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.  
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## Heat Pump

### Standard Type





MODEL	RXYQ48TANY1(E)	RXYQ50TANY1(E)	RXYQ52TANY1(E)	RXYQ54TANY1(E)	RXYQ56TANY1(E)	RXYQ58TANY1(E)	RXYQ60TANY1(E)		
Combination units	RXYQ14TAY1(E)	RXYQ14TAY1(E)	RXYQ16TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ20TAY1(E)		
	RXYQ16TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ20TAY1(E)	RXYQ20TAY1(E)		
	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ20TAY1(E)	RXYQ20TAY1(E)	RXYQ20TAY1(E)		
Power supply	3-phase 4-wire system, 380–415 V, 50 Hz								
Cooling capacity	kcal/h	116,000	120,000	125,000	129,000	134,000	139,000	144,000	
	Btu/h	461,000	478,000	495,000	512,000	532,000	553,000	573,000	
	kW	135	140	145	150	156	162	168	
Heating capacity	kcal/h	130,000	135,000	139,000	144,000	151,000	157,000	163,000	
	Btu/h	515,000	536,000	553,000	573,000	597,000	621,000	645,000	
	kW	151	157	162	168	175	182	189	
Power consumption	Cooling	kW	39.1	41.5	43.8	46.2	48.8	51.4	54.0
	Heating	kW	39.0	41.3	43.0	45.3	47.7	50.1	52.5
Capacity control	%	3-100	3-100	3-100	3-100	3-100	3-100	3-100	
Casing colour	Ivory white (5Y7.5/1)								
Compressor	Type	Hermetically Sealed Scroll Type							
	Motor output	kW	(2.9X1)+(3.3X1)+ (3.6X1)+(3.7X1)+ (4.4X1)+(4.0X1)	(2.9X1)+(3.3X1)+ (4.4X1)+(4.0X1)+ (4.4X1)+(4.0X1)	(3.6X1)+(3.7X1)+ (4.4X1)+(4.0X1)+ (4.4X1)+(4.0X1)	(4.4X1)+(4.0X1)+ (4.4X1)+(4.0X1)+ (4.4X1)+(4.0X1)	(4.4X1)+(4.0X1)+ (4.4X1)+(4.0X1)+ (4.6X1)+(5.5X1)	(4.4X1)+(4.0X1)+ (4.4X1)+(4.0X1)+ (4.6X1)+(5.5X1)	(4.6X1)+(5.5X1)+ (4.6X1)+(5.5X1)+ (4.6X1)+(5.5X1)
Airflow rate	m <sup>3</sup> /min	233+233+233	233+233+233	233+233+233	233+233+233	233+233+268	233+268+268	268+268+268	
Dimensions (HxWxD)	mm	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)	
Machine weight	kg	285+285+300	285+300+300	285+300+300	300+300+300	300+300+320	300+320+320	320+320+320	
Sound level	dB(A)	66	66	66	67	68	69	70	
Operation range	Cooling	°CDB	-5 to 49						
	Heating	°CWB	-20 to 15.5						
Refrigerant	Type	R-410A							
	Charge	kg	10.3+10.4+11.7	10.3+11.7+11.7	10.4+11.7+11.7	11.7+11.7+11.7	11.7+11.7+11.8	11.7+11.8+11.8	11.8+11.8+11.8
Piping connections	Liquid	mm	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)	φ19.1 (Brazing)
	Gas	mm	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)	φ41.3 (Brazing)

Note: 1. Models with (E) feature components treated for heat and rust corrosion resistance, such as external panels, fan motor, and electric component box, in addition to the fins of the heat exchanger. These models are designed specifically for use in areas which are subject to salt damage and atmospheric pollution. Please contact Daikin for more information.

2. Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

### Space Saving Type

MODEL	RXYQ18TAY1(E)	RXYQ20TAY1(E)	RXYQ22TASY1(E)	RXYQ24TASY1(E)		
Combination units	—	—	RXYQ10TAY1(E)	RXYQ12TAY1(E)		
	—	—	RXYQ12TAY1(E)	RXYQ12TAY1(E)		
	—	—	—	—		
Power supply	3-phase 4-wire system, 380–415 V, 50 Hz					
Cooling capacity	kcal/h	43,000	48,200	52,900	57,600	
	Btu/h	171,000	191,000	210,000	229,000	
	kW	50.0	56.0	61.5	67.0	
Heating capacity	kcal/h	48,200	54,200	59,300	64,500	
	Btu/h	191,000	215,000	235,000	256,000	
	kW	56.0	63.0	69.0	75.0	
Power consumption	Cooling	kW	15.4	18.0	15.7	17.6
	Heating	kW	15.1	17.5	16.4	18.1
Capacity control	%	10-100	8-100	8-100	8-100	
Casing colour	Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type				
	Motor output	kW	(4.4X1)+(4.0X1)	(4.6X1)+(5.5X1)	(4.1X1)+(5.2X1)	(5.2X1)+(5.2X1)
Airflow rate	m <sup>3</sup> /min	233	268	165+178	178+178	
Dimensions (HxWxD)	mm	1,657X1,240X765	1,657X1,240X765	(1,657X930X765)+ (1,657X930X765)	(1,657X930X765)+ (1,657X930X765)	
Machine weight	kg	300	320	195+195	195+195	
Sound level	dB(A)	62	65	61	62	
Operation range	Cooling	°CDB	-5 to 49			
	Heating	°CWB	-20 to 15.5			
Refrigerant	Type	R-410A				
	Charge	kg	11.7	11.8	6.0+6.3	6.3+6.3
Piping connections	Liquid	mm	φ15.9 (Brazing)	φ15.9 (Brazing)	φ15.9 (Brazing)	φ15.9 (Brazing)
	Gas	mm	φ28.6 (Brazing)	φ28.6 (Brazing)	φ28.6 (Brazing)	φ34.9 (Brazing)

Note: 1. Models with (E) feature components treated for heat and rust corrosion resistance, such as external panels, fan motor, and electric component box, in addition to the fins of the heat exchanger. These models are designed specifically for use in areas which are subject to salt damage and atmospheric pollution. Please contact Daikin for more information.

2. Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## Heat Pump

### Space Saving Type

MODEL			RXYQ26TASY1(E)	RXYQ28TASY1(E)	RXYQ30TASY1(E)	RXYQ32TASY1(E)	RXYQ34TASY1(E)	RXYQ36TASY1(E)	RXYQ38TASY1(E)	RXYQ40TASY1(E)	RXYQ42TASY1(E)	RXYQ44TASY1(E)	RXYQ46TASY1(E)	RXYQ48TASY1(E)	RXYQ50TASY1(E)
Combination units			RXYQ8TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)	RXYQ16TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ20TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)
			RXYQ18TAY1(E)	RXYQ16TAY1(E)	RXYQ18TAY1(E)	RXYQ20TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)	RXYQ20TAY1(E)	RXYQ20TAY1(E)	RXYQ12TAY1(E)	RXYQ12TAY1(E)	RXYQ16TAY1(E)	RXYQ18TAY1(E)	RXYQ18TAY1(E)
Power supply			3-phase 4-wire system, 380-415 V, 50 Hz						3-phase 4-wire system, 380-415 V, 50 Hz						
Cooling capacity		kcal/h	62,300	67,500	71,800	77,000	81,700	86,000	91,200	96,300	101,000	106,000	111,000	115,000	120,000
		Btu/h	247,000	268,000	285,000	305,000	324,000	341,000	362,000	382,000	399,000	420,000	440,000	457,000	478,000
		kW	72.4	78.5	83.5	89.5	95.0	100	106	112	117	123	129	134	140
Heating capacity		kcal/h	69,700	75,300	80,400	86,900	91,200	96,300	102,000	108,000	113,000	119,000	124,000	129,000	135,000
		Btu/h	276,000	299,000	319,000	345,000	362,000	382,000	406,000	430,000	447,000	471,000	491,000	512,000	536,000
		kW	81.0	87.5	93.5	101	106	112	119	126	131	138	144	150	157
Power consumption	Cooling	kW	20.6	21.8	24.2	26.8	28.4	30.8	33.4	36.0	33.0	35.6	37.2	39.6	42.2
	Heating	kW	20.8	21.9	24.2	26.6	27.9	30.2	32.6	35.0	33.2	35.6	37.0	39.3	41.7
Capacity control		%	7-100	6-100	6-100	5-100	5-100	5-100	4-100	4-100	4-100	4-100	4-100	4-100	3-100
Casing colour			Ivory white (5Y7.5/1)						Ivory white (5Y7.5/1)						
Compressor	Type		Hermetically Sealed Scroll Type						Hermetically Sealed Scroll Type						
	Motor output	kW	(3.4X1)+(4.4X1)+(4.0X1)	(5.2X1)+(3.6X1)+(3.7X1)	(5.2X1)+(4.4X1)+(4.0X1)	(5.2X1)+(4.6X1)+(5.5X1)	(3.6X1)+(3.7X1)+(4.4X1)+(4.0X1)	(4.4X1)+(4.0X1)+(4.4X1)+(4.0X1)	(4.4X1)+(4.0X1)+(4.6X1)+(5.5X1)	(4.6X1)+(5.5X1)+(4.6X1)+(5.5X1)	(5.2X1)+(5.2X1)+(4.4X1)+(4.0X1)	(5.2X1)+(5.2X1)+(4.6X1)+(5.5X1)	(5.2X1)+(3.6X1)+(3.7X1)+(4.4X1)+(4.0X1)	(5.2X1)+(4.4X1)+(4.0X1)+(4.4X1)+(4.0X1)	(5.2X1)+(4.4X1)+(4.0X1)+(4.6X1)+(5.5X1)
Airflow rate		m <sup>3</sup> /min	157+233	178+233	178+233	178+268	233+233	233+233	233+268	268+268	178+178+233	178+178+268	178+233+233	178+233+233	178+233+268
Dimensions (HxWxD)		mm	(1,657x930x765)+(1,657x1,240x765)	(1,657x930x765)+(1,657x1,240x765)	(1,657x930x765)+(1,657x1,240x765)	(1,657x930x765)+(1,657x1,240x765)	(1,657x1,240x765)+(1,657x1,240x765)	(1,657x1,240x765)+(1,657x1,240x765)	(1,657x1,240x765)+(1,657x1,240x765)	(1,657x1,240x765)+(1,657x1,240x765)	(1,657x930x765)+(1,657x930x765)+(1,657x1,240x765)	(1,657x930x765)+(1,657x930x765)+(1,657x1,240x765)	(1,657x930x765)+(1,657x1,240x765)+(1,657x1,240x765)	(1,657x930x765)+(1,657x1,240x765)+(1,657x1,240x765)	(1,657x930x765)+(1,657x1,240x765)+(1,657x1,240x765)
Machine weight		kg	185+300	195+285	195+300	195+320	285+300	300+300	300+320	320+320	195+195+300	195+195+320	195+285+300	195+300+300	195+300+320
Sound level		dB(A)	63	63	64	66	65	65	67	68	65	67	66	66	67
Operation range	Cooling	°CDB	-5 to 49						-5 to 49						
	Heating	°CWB	-20 to 15.5						-20 to 15.5						
Refrigerant	Type		R-410A						R-410A						
	Charge	kg	5.9+11.7	6.3+10.4	6.3+11.7	6.3+11.8	10.4+11.7	11.7+11.7	11.7+11.8	11.8+11.8	6.3+6.3+11.7	6.3+6.3+11.8	6.3+10.4+11.7	6.3+11.7+11.7	6.3+11.7+11.8
Piping connections	Liquid	mm	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)	φ19.1 (Brazeing)
	Gas	mm	φ34.9 (Brazeing)	φ34.9 (Brazeing)	φ34.9 (Brazeing)	φ34.9 (Brazeing)	φ34.9 (Brazeing)	φ41.3 (Brazeing)	φ41.3 (Brazeing)	φ41.3 (Brazeing)	φ41.3 (Brazeing)	φ41.3 (Brazeing)	φ41.3 (Brazeing)	φ41.3 (Brazeing)	φ41.3 (Brazeing)

Note: 1. Models with (E) feature components treated for heat and rust corrosion resistance, such as external panels, fan motor, and electric component box, in addition to the fins of the heat exchanger. These models are designed specifically for use in areas which are subject to salt damage and atmospheric pollution. Please contact Daikin for more information.

2. Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Unit Combinations

### For connection of only VRV indoor units

#### High-COP Type

HP	kW	Capacity index	Model name	Combination	Outdoor unit multi connection piping kit <sup>*1</sup>	Total capacity index of connectable indoor units <sup>*2</sup>	Maximum number of connectable indoor units <sup>*2</sup>
12	32.0	300	RXYQ12TAH	RXYQ6TA x 2	BHFP22P100	150 to 390 (480)	19 (24)
14	38.4	350	RXYQ14TAH	RXYQ6TA + RXYQ8TA		175 to 455 (560)	22 (28)
16	44.8	400	RXYQ16TAH	RXYQ8TA x 2		200 to 520 (640)	26 (32)
18	48.0	450	RXYQ18TAH	RXYQ6TA x 3		225 to 585 (585)	29 (29)
20	54.4	500	RXYQ20TAH	RXYQ6TA x 2 + RXYQ8TA		250 to 650 (650)	32 (32)
22	60.8	550	RXYQ22TAH	RXYQ6TA + RXYQ8TA x 2		275 to 715 (715)	35 (35)
24	67.2	600	RXYQ24TAH	RXYQ8TA x 3	300 to 780 (780)	39 (39)	
26	72.8	650	RXYQ26TAH	RXYQ8TA x 2 + RXYQ10TA	325 to 845 (845)	42 (42)	
28	78.3	700	RXYQ28TAH	RXYQ8TA x 2 + RXYQ12TA	350 to 910 (910)	45 (45)	
30	83.9	750	RXYQ30TAH	RXYQ8TA + RXYQ10TA + RXYQ12TA	375 to 975 (975)	48 (48)	
32	89.4	800	RXYQ32TAH	RXYQ8TA + RXYQ12TA x 2	400 to 1,040 (1,040)	52 (52)	
34	95.9	850	RXYQ34TAH	RXYQ8TA + RXYQ12TA + RXYQ14TA	BHFP22P151	425 to 1,105 (1,105)	55 (55)
36	102	900	RXYQ36TAH	RXYQ8TA + RXYQ14TA x 2		450 to 1,170 (1,170)	58 (58)
38	107	950	RXYQ38TAH	RXYQ12TA x 2 + RXYQ14TA		475 to 1,235 (1,235)	61 (61)
40	114	1,000	RXYQ40TAH	RXYQ12TA + RXYQ14TA x 2		500 to 1,300 (1,300)	64 (64)
42	120	1,050	RXYQ42TAH	RXYQ14TA x 3		525 to 1,365 (1,365)	
44	125	1,100	RXYQ44TAH	RXYQ14TA x 2 + RXYQ16TA		550 to 1,430 (1,430)	
46	130	1,150	RXYQ46TAH	RXYQ14TA + RXYQ16TA x 2	575 to 1,495 (1,495)		
48	135	1,200	RXYQ48TAH	RXYQ16TA x 3	600 to 1,560 (1,560)		
50	140	1,250	RXYQ50TAH	RXYQ16TA x 2 + RXYQ18TA	625 to 1,625 (1,625)		

Note: \*1 The outdoor unit multi connection piping kit (separately sold) is required for multiple connection.  
 \*2 Values inside brackets are based on connection of indoor units rated at maximum capacity, 200% for single outdoor units, 160% for double outdoor units, and 130% for triple outdoor units. Refer to page 9 for notes on connection capacity of indoor units.

#### Space Saving Type

HP	kW	Capacity index	Model name	Combination	Outdoor unit multi connection piping kit <sup>*1</sup>	Total capacity index of connectable indoor units <sup>*2</sup>	Maximum number of connectable indoor units <sup>*2</sup>
18	50.0	450	RXYQ18TA	RXYQ18TA	—	225 to 585 (900)	29 (45)
20	56.0	500	RXYQ20TA	RXYQ20TA	—	250 to 650 (1,000)	32 (50)
22	61.5	550	RXYQ22TAS	RXYQ10TA + RXYQ12TA	BHFP22P100	275 to 715 (880)	35 (44)
24	67.0	600	RXYQ24TAS	RXYQ12TA x 2		300 to 780 (960)	39 (48)
26	72.4	650	RXYQ26TAS	RXYQ8TA + RXYQ18TA		325 to 845 (1,040)	42 (52)
28	78.5	700	RXYQ28TAS	RXYQ12TA + RXYQ16TA		350 to 910 (1,120)	45 (56)
30	83.5	750	RXYQ30TAS	RXYQ12TA + RXYQ18TA		375 to 975 (1,200)	48 (60)
32	89.5	800	RXYQ32TAS	RXYQ12TA + RXYQ20TA		400 to 1,040 (1,280)	52 (64)
34	95.0	850	RXYQ34TAS	RXYQ16TA + RXYQ18TA	425 to 1,105 (1,360)	55 (64)	
36	100	900	RXYQ36TAS	RXYQ18TA x 2	450 to 1,170 (1,440)	58 (64)	
38	106	950	RXYQ38TAS	RXYQ18TA + RXYQ20TA	475 to 1,235 (1,520)	61 (64)	
40	112	1,000	RXYQ40TAS	RXYQ20TA x 2	500 to 1,300 (1,600)	64 (64)	
42	117	1,050	RXYQ42TAS	RXYQ12TA x 2 + RXYQ18TA	525 to 1,365 (1,365)		
44	123	1,100	RXYQ44TAS	RXYQ12TA x 2 + RXYQ20TA	550 to 1,430 (1,430)		
46	129	1,150	RXYQ46TAS	RXYQ12TA + RXYQ16TA + RXYQ18TA	575 to 1,495 (1,495)		
48	134	1,200	RXYQ48TAS	RXYQ12TA + RXYQ18TA x 2	600 to 1,560 (1,560)		
50	140	1,250	RXYQ50TAS	RXYQ12TA + RXYQ18TA + RXYQ20TA	625 to 1,625 (1,625)		

Note: \*1 For multiple connection of 22 HP and above the outdoor unit multi connection piping kit (separately sold) is required.  
 \*2 Values inside brackets are based on connection of indoor units rated at maximum capacity, 200% for single outdoor units, 160% for double outdoor units, and 130% for triple outdoor units. Refer to page 9 for notes on connection capacity of indoor units.

#### Standard Type

HP	kW	Capacity index	Model name	Combination	Outdoor unit multi connection piping kit <sup>*1</sup>	Total capacity index of connectable indoor units <sup>*2</sup>	Maximum number of connectable indoor units <sup>*2</sup>
6	16.0	150	RXYQ6TA	RXYQ6TA	—	75 to 195 (300)	9 (15)
8	22.4	200	RXYQ8TA	RXYQ8TA	—	100 to 260 (400)	13 (20)
10	28.0	250	RXYQ10TA	RXYQ10TA	—	125 to 325 (500)	16 (25)
12	33.5	300	RXYQ12TA	RXYQ12TA	—	150 to 390 (600)	19 (30)
14	40.0	350	RXYQ14TA	RXYQ14TA	—	175 to 455 (700)	22 (35)
16	45.0	400	RXYQ16TA	RXYQ16TA	—	200 to 520 (800)	26 (40)
18	50.4	450	RXYQ18TAN	RXYQ8TA + RXYQ10TA	BHFP22P100	225 to 585 (720)	29 (36)
20	55.9	500	RXYQ20TAN	RXYQ8TA + RXYQ12TA		250 to 650 (800)	32 (40)
22	62.4	550	RXYQ22TAN	RXYQ8TA + RXYQ14TA		275 to 715 (880)	35 (44)
24	68.0	600	RXYQ24TAN	RXYQ10TA + RXYQ14TA		300 to 780 (960)	39 (48)
26	73.5	650	RXYQ26TAN	RXYQ12TA + RXYQ14TA		325 to 845 (1,040)	42 (52)
28	80.0	700	RXYQ28TAN	RXYQ14TA x 2		350 to 910 (1,120)	45 (56)
30	85.0	750	RXYQ30TAN	RXYQ14TA + RXYQ16TA	375 to 975 (1,200)	48 (60)	
32	90.0	800	RXYQ32TAN	RXYQ14TA + RXYQ18TA	400 to 1,040 (1,280)	52 (64)	
34	95.0	850	RXYQ34TAN	RXYQ10TA + RXYQ12TA x 2	BHFP22P151	425 to 1,105 (1,105)	55 (55)
36	101	900	RXYQ36TAN	RXYQ12TA x 3		450 to 1,170 (1,170)	58 (58)
38	106	950	RXYQ38TAN	RXYQ8TA + RXYQ12TA + RXYQ18TA		475 to 1,235 (1,235)	61 (61)
40	112	1,000	RXYQ40TAN	RXYQ12TA x 2 + RXYQ16TA		500 to 1,300 (1,300)	64 (64)
42	119	1,050	RXYQ42TAN	RXYQ12TA + RXYQ14TA + RXYQ16TA		525 to 1,365 (1,365)	
44	124	1,100	RXYQ44TAN	RXYQ12TA + RXYQ16TA x 2		550 to 1,430 (1,430)	
46	130	1,150	RXYQ46TAN	RXYQ14TA x 2 + RXYQ18TA	575 to 1,495 (1,495)		
48	135	1,200	RXYQ48TAN	RXYQ14TA + RXYQ16TA + RXYQ18TA	600 to 1,560 (1,560)		
50	140	1,250	RXYQ50TAN	RXYQ14TA + RXYQ18TA x 2	625 to 1,625 (1,625)		
52	145	1,300	RXYQ52TAN	RXYQ16TA + RXYQ18TA x 2	650 to 1,690 (1,690)	64 (64)	
54	150	1,350	RXYQ54TAN	RXYQ18TA x 3	675 to 1,755 (1,755)		
56	156	1,400	RXYQ56TAN	RXYQ18TA x 2 + RXYQ20TA	700 to 1,820 (1,820)		
58	162	1,450	RXYQ58TAN	RXYQ18TA + RXYQ20TA x 2	725 to 1,885 (1,885)		
60	168	1,500	RXYQ60TAN	RXYQ20TA x 3	750 to 1,950 (1,950)		

Note: \*1 For multiple connection of 18 HP systems and above, the outdoor unit multi connection piping kit (separately sold) is required.  
 \*2 Values inside brackets are based on connection of indoor units rated at maximum capacity, 200% for single outdoor units, 160% for double outdoor units, and 130% for triple outdoor units. Refer to page 9 for notes on connection capacity of indoor units.

### For mixed combination of VRV and residential indoor units or connection of only residential indoor units

Model name <sup>*1</sup>	kW	HP	Capacity index	Total capacity index of connectable indoor units <sup>*2</sup>			Maximum number of connectable indoor units
				Combination (%) <sup>*2</sup>			
				80%	100%	130%	
RXYQ6TAY1	16.0	6	150	120	150	195	9
RXYQ8TAY1	22.4	8	200	160	200	260	13
RXYQ10TAY1	28.0	10	250	200	250	325	16
RXYQ12TAY1	33.5	12	300	240	300	390	19
RXYQ14TAY1	40.0	14	350	280	350	455	22
RXYQ16TAY1	45.0	16	400	320	400	520	26
RXYQ18TAY1	50.0	18	450	360	450	585	29
RXYQ20TAY1	56.0	20	500	400	500	650	32

Note: \*1 Only single outdoor unit (RXYQ6-20TAY1) can be connected.  
 \*2 Total capacity index of connectable indoor units must be 80% - 130% of the capacity index of the outdoor unit.



## VRV Indoor Units

### Ceiling Mounted Cassette (Round Flow with Sensing) Type

No.	Item	Type	FXFQ25S	FXFQ32S	FXFQ40S	FXFQ50S	FXFQ63S	FXFQ80S	FXFQ100S	FXFQ125S	
1	Decoration panel					BYCQ125B-W1					
2	Sealing material of air discharge outlet					KDBHQ55B140					
3	Panel spacer					KDBP55H160FA					
4	Filter related	High efficiency filter unit 65%				KAFP556C80			KAFP556C160		
		High efficiency filter unit 90%				KAFP557C80			KAFP557C160		
		Replacement high efficiency filter 65%				KAFP552B80			KAFP552B160		
		Replacement high efficiency filter 90%				KAFP553B80			KAFP553B160		
		Filter chamber					KDDFP55C160				
		Long life replacement filter					KAFP551K160				
		Ultra long-life filter unit					KAFP55C160				
5	Fresh air intake kit	Replacement ultra long-life filter				KAFP55H160H					
		Chamber type	Without T-duct joint	KDDQ55B140 (Components: KDDP55C160-1, KDDQ55B140-2) *1							
		With T-duct joint	KDDP55B160K (Components: KDDP55C160-1, KDDP55B160K2) *1								
		Direct installation type	KDDP55X160A								
6	Branch duct chamber					KDJP55B80			KDJP55B160		
7	Insulation kit for high humidity					KDTP55K80			KDTP55K160		

Note: \*1. Please order using the names of both components instead of set name.

### Ceiling Mounted Cassette (Round Flow) Type

No.	Item	Type	FXFQ25LU	FXFQ32LU	FXFQ40LU	FXFQ50LU	FXFQ63LU	FXFQ80LU	FXFQ100LU	FXFQ125LU	
1	Decoration panel					BYCP125K-W1					
2	Sealing material of air discharge outlet					KDBH55K160F					
3	Panel spacer					KDBP55H160FA					
4	Filter related	High efficiency filter unit 65%				KAFP556C80			KAFP556C160		
		High efficiency filter unit 90%				KAFP557C80			KAFP557C160		
		Replacement high efficiency filter 65%				KAFP552B80			KAFP552B160		
		Replacement high efficiency filter 90%				KAFP553B80			KAFP553B160		
		Filter chamber					KDDFP55C160				
		Long life replacement filter					KAFP551K160				
		Ultra long-life filter unit					KAFP55C160				
5	Fresh air intake kit	Replacement ultra long-life filter				KAFP55H160H					
		Chamber type	Without T-duct joint	KDDP55B160 (Components: KDDP55C160-1, KDDP55B160-2) *1							
		With T-duct joint	KDDP55B160K (Components: KDDP55C160-1, KDDP55B160K2) *1								
		Direct installation type	KDDP55X160A								
6	Branch duct chamber					KDJP55B80			KDJP55B160		
7	Chamber connection kit					KKSJ55KA160					
8	Insulation kit for high humidity					KDTP55K80			KDTP55K160		

Note: \*1. Please order using the names of both components instead of set name.

### Ceiling Mounted Cassette (Compact Multi Flow) Type

No.	Item	Type	FXZQ20M	FXZQ25M	FXZQ32M	FXZQ40M	FXZQ50M
1	Decoration panel				BYFQ60B3W1		
2	Sealing material of air discharge outlet				KDBH44BA60		
3	Panel spacer				KDBQ44BA60A		
4	Replacement long-life filter				KAFQ441BA60		
5	Fresh air intake kit	Direct installation type			KDDQ44XA60		

### 4-Way Flow Ceiling Suspended Type

No.	Item	Type	FXUQ71A	FXUQ100A
1	Sealing material of air discharge outlet			KDBHP49B140
2	Decoration panel for air discharge			KDBTP49B140
3	Replacement long-life filter			KAFP551K160

### Ceiling Mounted Cassette (Double Flow) Type

No.	Item	Type	FXCQ20M FXCQ25M FXCQ32M	FXCQ40M	FXCQ50M	FXCQ63M	FXCQ80M	FXCQ125M
1	Decoration panel		BYBC32G-W1	BYBC50G-W1	BYBC63G-W1	BYBC125G-W1		
2	Filter related	High efficiency filter 65% *1	KAFJ532G36	KAFJ532G56	KAFJ532G80	KAFJ532G160		
		High efficiency filter 90% *1	KAFJ533G36	KAFJ533G56	KAFJ533G80	KAFJ533G160		
		Filter chamber bottom suction	KDDFJ53G36	KDDFJ53G56	KDDFJ53G80	KDDFJ53G160		
		Long life replacement filter	KAFJ531G36	KAFJ531G56	KAFJ531G80	KAFJ531G160		

Note: \*1 Filter chamber is required if installing high efficiency filter.

### Ceiling Mounted Cassette Corner Type

No.	Item	Type	FXKQ25MA	FXKQ32MA	FXKQ40MA	FXKQ63MA
1	Panel related	Decoration panel		BYK45FJW1		BYK71FJW1
		Panel spacer		KPB52F56W		KPB52F80W
2	Air inlet and air discharge outlet related	Long life replacement filter		KAFJ521F56		KAFJ521F80
		Air discharge grille		K-HV7AW		K-HV9AW
		Air discharge blind panel		KDBJ52F56W		KDBJ52F80W
		Flexible duct (with shutter)		KFDJ52FA56		KFDJ52FA80

### Slim Ceiling Mounted Duct Type

No.	Item	Type	FXDQ20PB	FXDQ25PB	FXDQ32PB	FXDQ40NB	FXDQ50NB	FXDQ63NB
1	Insulation kit for high humidity		KDT25N32			KDT25N50		KDT25N63

### Middle Static Pressure Ceiling Mounted Duct Type

No.	Item	Type	FXSQ20P FXSQ25P FXSQ32P	FXSQ40P	FXSQ50P FXSQ63P FXSQ80P	FXSQ100P FXSQ125P	FXSQ140P	
1	High efficiency filter *1	65%	KAFP632B36	KAFP632B56	KAFP632B80	KAFP632B160	KAFP632B160B	
		90%	KAFP633B36	KAFP633B56	KAFP633B80	KAFP633B160	KAFP633B160B	
2	Filter chamber (for rear suction) *1		KDDFP63B36	KDDFP63B56	KDDFP63B80	KDDFP63B160	KDDFP63B160B	
3	Long-life filter *1		KAFP631B36	KAFP631B56	KAFP631B80	KAFP631B160	KAFP631B160B	
4	Service panel	White	KTBJ25K36W	KTBJ25K56W	KTBJ25K80W	KTBJ25K160W		
		Fresh white	KTBJ25K36F	KTBJ25K56F	KTBJ25K80F	KTBJ25K160F		
		Brown	KTBJ25K36T	KTBJ25K56T	KTBJ25K80T	KTBJ25K160T		
5	Air discharge adaptor		KDAP25A36A	KDAP25A56A	KDAP25A71A	KDAP25A140A	KDAP25A160A *2	
6	Shield plate for side plate		KDBD63A160					-

Note: \*1. If installing high efficiency filter and long-life filter to the unit, filter chamber is required.

\*2. This option is a set of KDAP25A140A and KDBHP37A160.

### Ceiling Mounted Duct Type

No.	Item	Type	FXMQ20P FXMQ25P FXMQ32P	FXMQ40P	FXMQ50P FXMQ63P FXMQ80P	FXMQ100P FXMQ125P FXMQ140P	FXMQ200MA FXMQ250MA
1	Drain pump kit						KDU30L250VE
2	High efficiency filter	65%	KAF372AA36	KAF372AA56	KAF372AA80	KAF372AA160	KAFJ372L280
		90%	KAF373AA36	KAF373AA56	KAF373AA80	KAF373AA160	KAFJ373L280
3	Filter chamber		KDDF37AA36	KDDF37AA56	KDDF37AA80	KDDF37AA160	KDJ3705L280
4	Long life replacement filter		KAF371AA36	KAF371AA56	KAF371AA80	KAF371AA160	KAFJ371L280
5	Long life filter chamber kit		KAF375AA36	KAF375AA56	KAF375AA80	KAF375AA160	
6	Service panel	White	KTBJ25K36W	KTBJ25K56W	KTBJ25K80W	KTBJ25K160W	
		Fresh white	KTBJ25K36F	KTBJ25K56F	KTBJ25K80F	KTBJ25K160F	
		Brown	KTBJ25K36T	KTBJ25K56T	KTBJ25K80T	KTBJ25K160T	
7	Air discharge adaptor		KDAJ25K36A	KDAJ25K56A	KDAJ25K71A	KDAJ25K140A	

### Ceiling Suspended Type

No.	Item	Type	FXHQ32MA	FXHQ63MA	FXHQ100MA
1	Drain pump kit		KDU50N60VE	KDU50N125VE	
2	Replacement long-life filter (Resin net)		KAF501DA56	KAF501DA80	KAF501DA112
3	L-type piping kit (for upward direction)		KHFP5MA63	KHFP5MA160	

### Wall Mounted Type

No.	Item	Type	FXAQ20P	FXAQ25P	FXAQ32P	FXAQ40P	FXAQ50P	FXAQ63P
1	Drain pump kit		K-KDU572EVE					

## VRV Indoor Units

### Floor Standing Type

No.	Item	Type	FXLQ20MA	FXLQ25MA	FXLQ32MA	FXLQ40MA	FXLQ50MA	FXLQ63MA
1	Long life replacement filter		KAFJ361K28		KAFJ361K45		KAFJ361K71	

### Concealed Floor Standing Type

No.	Item	Type	FXNQ20MA	FXNQ25MA	FXNQ32MA	FXNQ40MA	FXNQ50MA	FXNQ63MA
1	Long life replacement filter		KAFJ361K28		KAFJ361K45		KAFJ361K71	

## Residential Indoor Units with connection to BP units

### Slim Ceiling Mounted Duct Type

No.	Item	Type	CDXS25EAVMA	CDXS35EAVMA	FDXS25CVMA	FDXS35CVMA	FDXS50CVMA	FDXS60CVMA
1	Insulation kit for high humidity		KDT25N32		KDT25N50		KDT25N63	

### Wall Mounted Type

No.	Item	Type	FTXS20DVMA	FTXS25EVMA FTXS35EVMA	FTXS50FVMA FTXS60FVMA FTXS71FVMA
1	Titanium apatite photocatalytic air-purifying filter		KAF970A46		KAF952B42

Note: Filter is a standard accessory. It should be replaced approximately 3 years.

### BP Units for connection to residential indoor units

No.	Item	Type	BPMKS967A2	BPMKS967A3
1	REFNET joint		KHRP26A22T	

Note: A single BP unit does not require a REFNET joint. 2 BP units require only 1 REFNET joint, and 3 BP units require only 2 REFNET joints.

## Outdoor Units

### High-COP Type

Optional Accessories		RXYQ12TAHY1(E) RXYQ14TAHY1(E) RXYQ16TAHY1(E)
Distributive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch)
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T
Outdoor unit multi connection piping kit		BHFP22P100
Cool / Heat selector		KRC19-26A

Optional Accessories		RXYQ18TAHY1(E) RXYQ20TAHY1(E) RXYQ22TAHY1(E)	RXYQ24TAHY1(E) RXYQ26TAHY1(E) RXYQ28TAHY1(E) RXYQ30TAHY1(E) RXYQ32TAHY1(E)	RXYQ34TAHY1(E)
Distributive piping	REFNET header	KHRP26M22H (Max. 4 branch), KHRP26M33H (Max. 8 branch), KHRP26M72H (Max. 8 branch)	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch) (Max. 8 branch)	
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T	
Pipe size reducer		-	KHRP26M73TP, KHRP26M73HP	
Outdoor unit multi connection piping kit		BHFP22P151		
Cool / Heat selector		KRC19-26A		

Optional Accessories		RXYQ36TAHY1(E)	RXYQ38TAHY1(E)	RXYQ40TAHY1(E)	RXYQ42TAHY1(E) RXYQ44TAHY1(E) RXYQ46TAHY1(E) RXYQ48TAHY1(E) RXYQ50TAHY1(E)
Distributive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch) (Max. 8 branch)			
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T			
Pipe size reducer		KHRP26M73TP, KHRP26M73HP			
Outdoor unit multi connection piping kit		BHFP22P151			
Cool / Heat selector		KRC19-26A			

### Standard Type

Optional Accessories		RXYQ6TAY1(E) RXYQ8TAY1(E) RXYQ10TAY1(E)	RXYQ12TAY1(E)	RXYQ14TAY1(E) RXYQ16TAY1(E)
Distributive piping	REFNET header	KHRP26M22H (Max. 4 branch), KHRP26M33H (Max. 8 branch)	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch)	
	REFNET joint	KHRP26A22T KHRP26A33T	KHRP26A22T, KHRP26A33T, KHRP26A72T	
Cool / Heat selector		KRC19-26A		

Optional Accessories		RXYQ18TANY1(E) RXYQ20TANY1(E)	RXYQ22TANY1(E)	RXYQ24TANY1(E) RXYQ26TANY1(E)	RXYQ28TANY1(E) RXYQ30TANY1(E) RXYQ32TANY1(E)
Distributive piping	REFNET header	KHRP26M22H, KHRP26M33H (Max. 4 branch) (Max. 8 branch), KHRP26M72H (Max. 8 branch)		KHRP26M22H, KHRP26M33H, (Max. 4 branch) (Max. 8 branch) KHRP26M72H, KHRP26M73H (Max. 8 branch) (Max. 8 branch)	
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T		KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T	
Pipe size reducer		-			
Outdoor unit multi connection piping kit		BHFP22P151			
Cool / Heat selector		KRC19-26A			

Optional Accessories		RXYQ34TANY1(E) RXYQ36TANY1(E)	RXYQ38TANY1(E) RXYQ40TANY1(E)	RXYQ42TANY1(E) RXYQ44TANY1(E)	RXYQ46TANY1(E) RXYQ48TANY1(E) RXYQ50TANY1(E) RXYQ52TANY1(E) RXYQ54TANY1(E) RXYQ56TANY1(E) RXYQ58TANY1(E) RXYQ60TANY1(E)
Distributive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch) (Max. 8 branch)			
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T			
Pipe size reducer		KHRP26M73TP, KHRP26M73HP			
Outdoor unit multi connection piping kit		BHFP22P151			
Cool / Heat selector		KRC19-26A			

### Space Saving Type

Optional Accessories		RXYQ18TAY1(E) RXYQ20TAY1(E)
Disinbutive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max.4 branch) (Max.8 branch) (Max.8 branch)
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T
Cool / Heat selector		KRC19-26A

Optional Accessories		RXYQ22TASY1(E)	RXYQ24TASY1(E)	RXYQ26TASY1(E) RXYQ28TASY1(E) RXYQ30TASY1(E) RXYQ32TASY1(E)	RXYQ34TASY1(E) RXYQ36TASY1(E) RXYQ38TASY1(E) RXYQ40TASY1(E)
Disinbutive piping	REFNET header	KHRP26M22H (Max.4 branch), KHRP26M33H (Max.8 branch), KHRP26M72H (Max.8 branch)	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max.4 branch) (Max.8 branch) (Max.8 branch) (Max.8 branch)		
	REFNET joint	KHRP26A22T, KHRP26M33T, KHRP26M72T	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T		
Pipe size reducer		-	KHRP26M73TP, KHRP26M73HP		
Outdoor unit connection piping kit		BHFP22P100			
Cool / Heat selector		KRC19-26A			

Optional Accessories		RXYQ42TASY1(E) RXYQ44TASY1(E)	RXYQ46TASY1(E) RXYQ48TASY1(E) RXYQ50TASY1(E)
Disinbutive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max.4 branch) (Max.8 branch) (Max.8 branch) (Max.8 branch)	
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T	
Pipe size reducer		KHRP26M73TP, KHRP26M73HP	
Outdoor unit connection piping kit		BHFP22P151	
Cool / Heat selector		KRC19-26A	

## Control Systems

### Operation Control System Optional Accessories

#### For VRV indoor unit use

No.	Item	Type	FXFQ-S	FXFQ-LU	FXZQ-M	FXUQ-A	FXCQ-M	FXKQ-MA	FXDQ-PB FXDQ-NB
1	Remote controller	Wireless	BRC7F634F		BRC7E530W	BRC7CB58	BRC7C62	BRC4C61	BRC4C65
		Wired	BRC1C62						
2	Navigation remote controller (Wired remote controller)		BRC1E62 Note 7						
3	Simplified remote controller (Exposed type)		BRC2C51						
4	Remote controller for hotel use (Concealed type)		BRC3A61						
5	Adaptor for wiring		★KRP1C63	★KRP1BA57	—	★KRP1B61	KRP1B61	★KRP1B56	
6-1	Wiring adaptor for electrical appendices (1)		★KRP2A62	★KRP2A62	—	★KRP2A61	KRP2A61	★KRP2A53	
6-2	Wiring adaptor for electrical appendices (2)		★KRP4AA53	★KRP4AA53	★KRP4AA53	★KRP4AA51	KRP4AA51	★KRP4A54	
7	Remote sensor (for indoor temperature)		KRCS01-4B	KRCS01-1B	KRCS01-4B	KRCS01-1B			
8	Installation box for adaptor PCB☆		Note 2, 3 KRP1H98A	Note 4, 6 KRP1BA101	KRP1BA97	Note 2, 3 KRP1B96	—	Note 4, 6 KRP1BA101	
9	External control adaptor for outdoor unit		★DTA104A62	★DTA104A62	—	★DTA104A61	DTA104A61	★DTA104A53	
10	Adaptor for multi tenant		★DTA114A61	—					

No.	Item	Type	FXSQ-P	FXMQ-P	FXMQ-MA	FXHQ-MA	FXAQ-P	FXLQ-MA FXNQ-MA
1	Remote controller	Wireless	BRC4C65		BRC4C62	BRC7EA63W	BRC7EA618	BRC4C62
		Wired	BRC1C62					
2	Navigation remote controller (Wired remote controller)		BRC1E62 Note 7					
3	Simplified remote controller (Exposed type)		BRC2C51	BRC2C51	—		BRC2C51	
4	Remote controller for hotel use (Concealed type)		BRC3A61	BRC3A61	—		BRC3A61	
5	Adaptor for wiring		★KRP1C64	KRP1B61	KRP1BA54	—	KRP1B61	
6-1	Wiring adaptor for electrical appendices (1)		★KRP2A61	KRP2A61	★KRP2A62	★KRP2A61	KRP2A61	
6-2	Wiring adaptor for electrical appendices (2)		★KRP4AA51	KRP4AA51	★KRP4AA52	★KRP4AA51	KRP4AA51	
7	Remote sensor (for indoor temperature)		KRCS01-4B	KRCS01-1B	KRCS01-1B			
8	Installation box for adaptor PCB☆		Note 2, 3 KRP4A98	Note 2, 3 KRP4A96	—	Note 3 KRP1CA93	Note 2, 3 KRP4AA93	—
9	External control adaptor for outdoor unit		★DTA104A61	DTA104A61	★DTA104A62	★DTA104A61	DTA104A61	
10	Adaptor for multi tenant		★DTA114A61	—				
11	External control adaptor for cooling/heating		—					
12	Remote controller with key		—					

Note: 1. Installation box☆ is necessary for each adaptor marked ★.  
 2. Up to 2 adaptors can be fixed for each installation box.  
 3. Only one installation box can be installed for each indoor unit.  
 4. Up to 2 installation boxes can be installed for each indoor unit.  
 5. Installation box☆ is necessary for second adaptor.  
 6. Installation box☆ is necessary for each adaptor.  
 7. Individual airflow direction, auto airflow rate and sensing sensor control can be set only via wired remote controller BRC1E62. Cannot be set via other remote controllers.  
 Available functions depend on the type of indoor unit.

#### For residential indoor unit use

No.	Item	Type	CDXS-EA FDXS-C	FTXS-D,B,F
1	Remote controller	Wireless type	— Note 1	
2	Wiring adaptor for time clock/remote controller (Normal open pulse contact/normal open contact)	Note 2	KRP413AB1S	
3	Remote controller loss prevention chain		KKF917A4	KKF917A4
4	Interface adaptor for DIII-NET use		KRP928BB2S	

Note: 1. A wireless remote controller is a standard accessory.  
 2. Time clock and other devices should be obtained locally.

### System Configuration

No.	Item	Type	Model No.	Function
1	Residential central remote controller		Note 2 DCS303A51	• Up to 16 groups of indoor units (128 units) can be easily controlled using the large LCD panel. ON/OFF, temperature settings and scheduling can be controlled individually for indoor units.
2	5-room centralised controller for residential indoor units	For C(F)DXS, FTXS	Note 3 KRC72A	• Up to 5 indoor units can be controlled. This is a low cost system which can only control ON/OFF.
3	Interface adaptor for residential indoor units		KRP928BB2S	• Adaptors required to connect products other than those of the VRV System to the high-speed DIII-NET communication system adopted for the VRV System.
4	Interface adaptor for SkyAir-series		Note 4 ★DTA112BA51	* To use any of the above optional controllers, an appropriate adaptor must be installed on the product unit to be controlled.
5	Central control adaptor kit For UAT(Y)-K(A),FD-K		★DTA107A55	
6	Wiring adaptor for other air-conditioner		★DTA103A51	
7	DIII-NET Expander Adaptor		DTA109A51	• Up to 1024 units can be centrally controlled in 64 different groups. • Wiring restrictions (max. length: 1,000m, total wiring length: 2,000m, max. number of branches: 16) apply to each adaptor.
7-1	Mounting plate		KRP4A92	• Fixing plate for DTA109A51

Note: 1. Installation box for ★ adaptor must be obtained locally.  
 2. For residential use only. Cannot be used with other centralised control equipment.  
 3. A wiring adaptor (KRP413AB1S) is also required for each indoor unit.  
 4. No adaptor is required for some indoor units.

### Building Management System

No.	Item	Type	Model No.	Function
1	intelligent Touch Controller	Basic Hardware	intelligent Touch Controller DCS601C51	• Air-Conditioning management system that can be controlled by a compact all-in-one unit.
1-1		Option Hardware	DIII-NET plus adaptor DCS601A52	• Additional 64 groups (10 outdoor units) is possible.
1-2	Electrical box with earth terminal (4 blocks)		KJB411A	• Wall embedded switch box.
2		Basic Hardware	intelligent Touch Manager DCM601A51	• Air-conditioning management system that can be controlled by touch screen.
2-1		Hardware	iTM plus adaptor DCM601A52	• Additional 64 groups (10 outdoor units) is possible. Max. 7 iTM plus adaptors can be connected to intelligent Touch Manager.
2-2	intelligent Touch Manager	Option Software	iTM power proportional distribution DCM002A51	• Power consumption of indoor units are calculated based on operation status of the indoor unit and outdoor unit power consumption measured by kWh metre.
2-3			iTM energy navigator DCM008A51	• Building energy consumption is visualised. Wasted air-conditioning energy can be found out.
2-4			BACnet client DCM009A51	• BACnet equipment can be managed by intelligent Touch Manager.
2-5			HTTP Interface DCM007A51	• Interface for intelligent Touch Manager by HTTP
2-6		Hardware	SVMR2 SVMPS1	• VRV Smart Phone Control System for residence • Tenant Billing System with PPD
2-7			*1 SVM series	
2-8	VRV Smart Phone Control System		SVMR1	• VRV Smart Phone Control System for residence with DTA116A51.
2-9	Di unit		DEC101A51	• 8 pairs based on a pair of ON/OFF input and abnormality input.
2-10	Dio unit		DEC102A51	• 4 pairs based on a pair of ON/OFF input and abnormality input.
3			*2 Interface for use in BACnet® DMS502B51	• Interface unit to allow communications between VRV and BMS. Operation and monitoring of air-conditioning systems through BACnet® communication.
3-1	Communication interface	Optional DIII board	DAM411B51	• Expansion kit, installed on DMS502B51, to provide 2 more DIII-NET communication ports. Not usable independently.
3-2		Optional Di board	DAM412B51	• Expansion kit, installed on DMS502B51, to provide 16 more wattmeter pulse input points. Not usable independently.
4			*3 Interface for use in LONWORKS® DMS504B51	• Interface unit to allow communications between VRV and BMS. Operation and monitoring of air-conditioning systems through LonWorks® communication.
5			Home Automation Interface Adaptor DTA116A51	• Use of the Modbus protocol enables the connection of the VRV system with a variety of home automation systems from other manufacturers.
6	Contact/analogue signal	Unification adaptor for computerised control	★DCS302A52	• Interface between the central monitoring board and central control units.

Note: \*1. HTTP interface (DCM007A51) is also required.  
 \*2. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).  
 \*3. LonWorks® is a trademark of Echelon Corporation registered in the United States and other countries.  
 \*4. Installation box for ★ adaptor must be obtained locally.

## Individual Control Systems for VRV Indoor Units


### Navigation remote controller (Wired remote controller) (Option)



BRC1E62

#### Clear display


- **Dot matrix display**  
A combination of fine dots enables various icons. Large text display is easy to see.

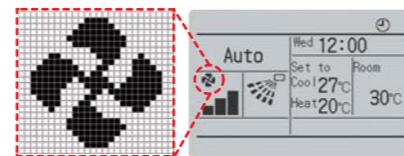

- **Backlight display**  
Backlight display helps operating in dark rooms.

#### Simple operation

- **Large buttons and arrow keys**  
Large buttons and arrow keys enable easy operation. Basic setting such as fan speed and temperature can be intuitively operated. For other settings just select the function from the menu list.

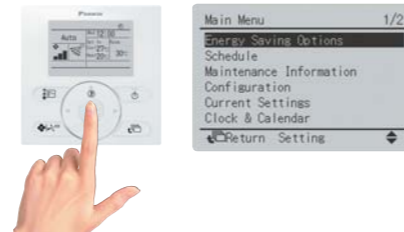


- **Guide on display**  
The display gives an explanation of each setting for easy operation.

### Energy saving


#### • Auto operation mode

- Until now only the temperature for one point could be set, but now the new remote controller (BRC1E62) allows the setting of both Cooling and Heating, and with the fan operation, mid-range temperatures are comfortable and operation is more energy efficient.

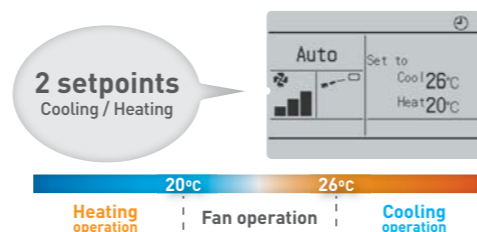

#### • Setpoint range set

- Saves energy by limiting the min. and max. set temperature.
- Avoids excessive cooling or heating.
- This function is convenient when the remote controller is installed at a place where any number of people may operate it.




#### • Off timer


- Turns off the air conditioner after a preset period of time.
- Period can be preset from 30 to 180 minutes in 10-minute increments.

#### • Setpoint auto reset

- Even if the set temperature is changed, it returns to the preset temperature after a preset period of time.
- Period selectable from 30 min/60 min/90 min/120 min.



#### Restaurant sample

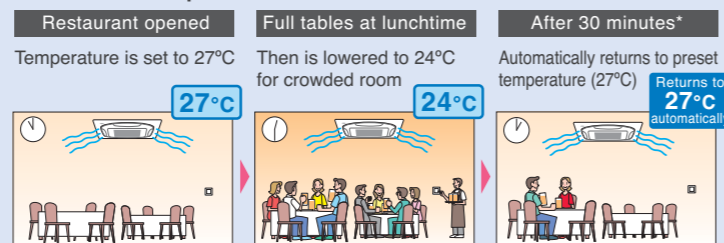

\*Setting possible for after 30, 60, 90, and 120 minutes.

### Convenience

#### • Setback (default:OFF)


Maintains the room temperature in a specific range during unoccupied period by temporarily starting air conditioner that was turned OFF.

Ex) Setback temperature Cooling : 35°C Recovery differential Cooling : -2°C  
When the room temperature goes above 35°C, the air conditioner starts operating in Cooling automatically. When room temperature reaches 33°C, the air conditioner returns OFF.


	Setback temperature	Recovery differential
Cooling	33 — 37°C	-2 — -8°C
Heating	10 — 15°C	+2 — +8°C

#### • Weekly schedule

- 5 actions per day can be scheduled for each day of the week.
- The holiday function will disable schedule timer for the days that have been set as holiday.
- 3 independent schedules can be set. (e.g. summer, winter, mid-season)




#### College classroom sample (a summer Monday case)

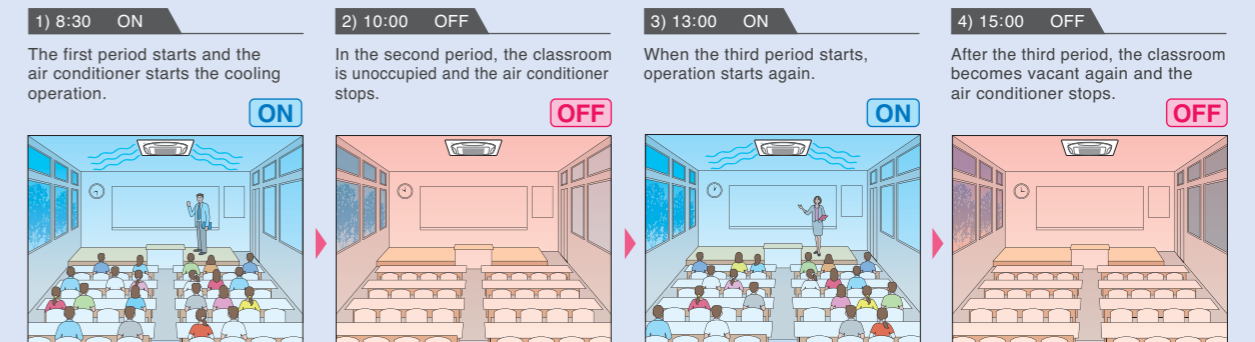

### Comfort

#### • Individual airflow direction (\*1)

Airflow direction of each of the four air outlets can be controlled individually. (Positions 0 to 4, Swing, and No individual setting are selectable.)

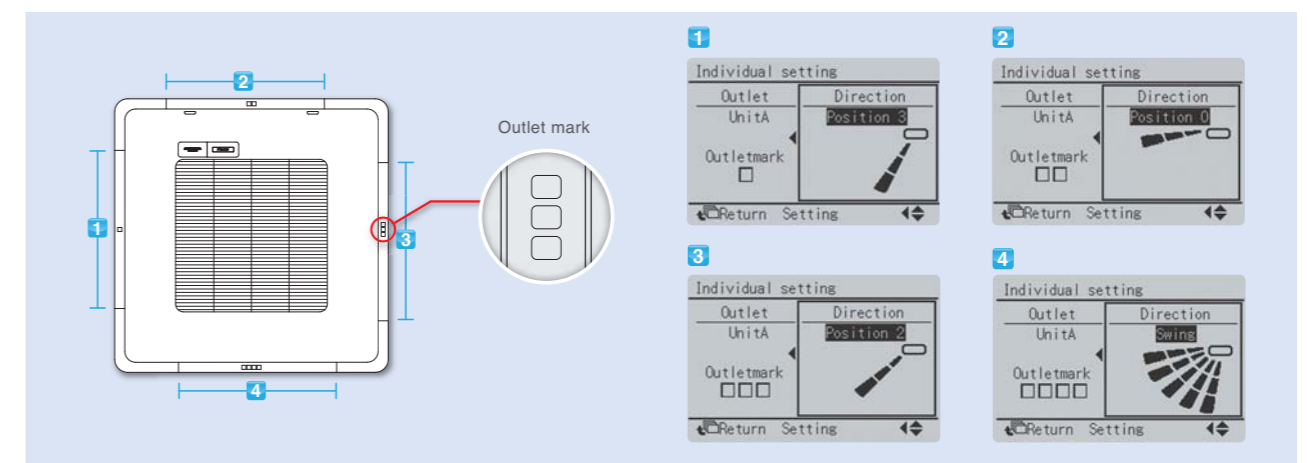

#### • Auto airflow rate (\*2)

Airflow rate is automatically controlled in accordance with the difference between room temperature and set temperature.

\*1 Only available for VRV 4-Way Flow Ceiling Suspended type FXUQ-A series and Ceiling Mounted Cassette (Round Flow with Sensing) type FXFQ-S series.  
\*2 Only available for VRV 4-Way Flow Ceiling Suspended type FXUQ-A series, Ceiling Mounted Cassette (Round Flow with Sensing) type FXFQ-S series and Middle Static Pressure Ceiling Mounted Duct type FXSQ-P series.

## Individual Control Systems for VRV Indoor Units

### Wired remote controller (Option)




BRC1C62

- Displays current airflow, swing, temperature, operating mode and timer settings.

\* Individual airflow direction, auto airflow rate and sensing sensor control can be set only via wired remote controller BRC1E62. Cannot be set via other remote controllers.

### Wireless remote controller (Option)




Wireless remote controller

Signal receiver unit (Separate type)

- The same operation modes and settings as with wired remote controllers are possible.
- \* Individual airflow direction, auto airflow rate and sensing sensor control can be set only via wired remote controller BRC1E62. Cannot be set via other remote controllers.
- A compact signal receiver unit (separate type) to be mounted into a wall or ceiling is included.
- A signal receiver unit (installed type) for a Ceiling Mounted Cassette (Round Flow, Compact Multi Flow, Double Flow) type, Ceiling Suspended type and Wall Mounted type is mounted into the indoor unit.



Signal receiver unit can be installed on the panel  
ex. Ceiling Mounted Cassette (Round Flow) type



\* Wireless remote controller and signal receiver unit are sold as a set.  
\* Refer to page 69 for the name of each model.

### Simplified remote controller (Option)



Exposed type (BRC2C51)


Concealed type (For hotel use) (BRC3A61)

- The remote controller has centralised its frequently used operation selectors and switches (on/off, operation mode, temperature setting and airflow volume), making itself suitable for use in hotel rooms or conference rooms.
- The exposed type remote controller is fitted with a thermostat sensor.



The concealed type remote controller smartly fits into a night table or console panel in a hotel room.

### The wired remote controller supports a wide range of control functions

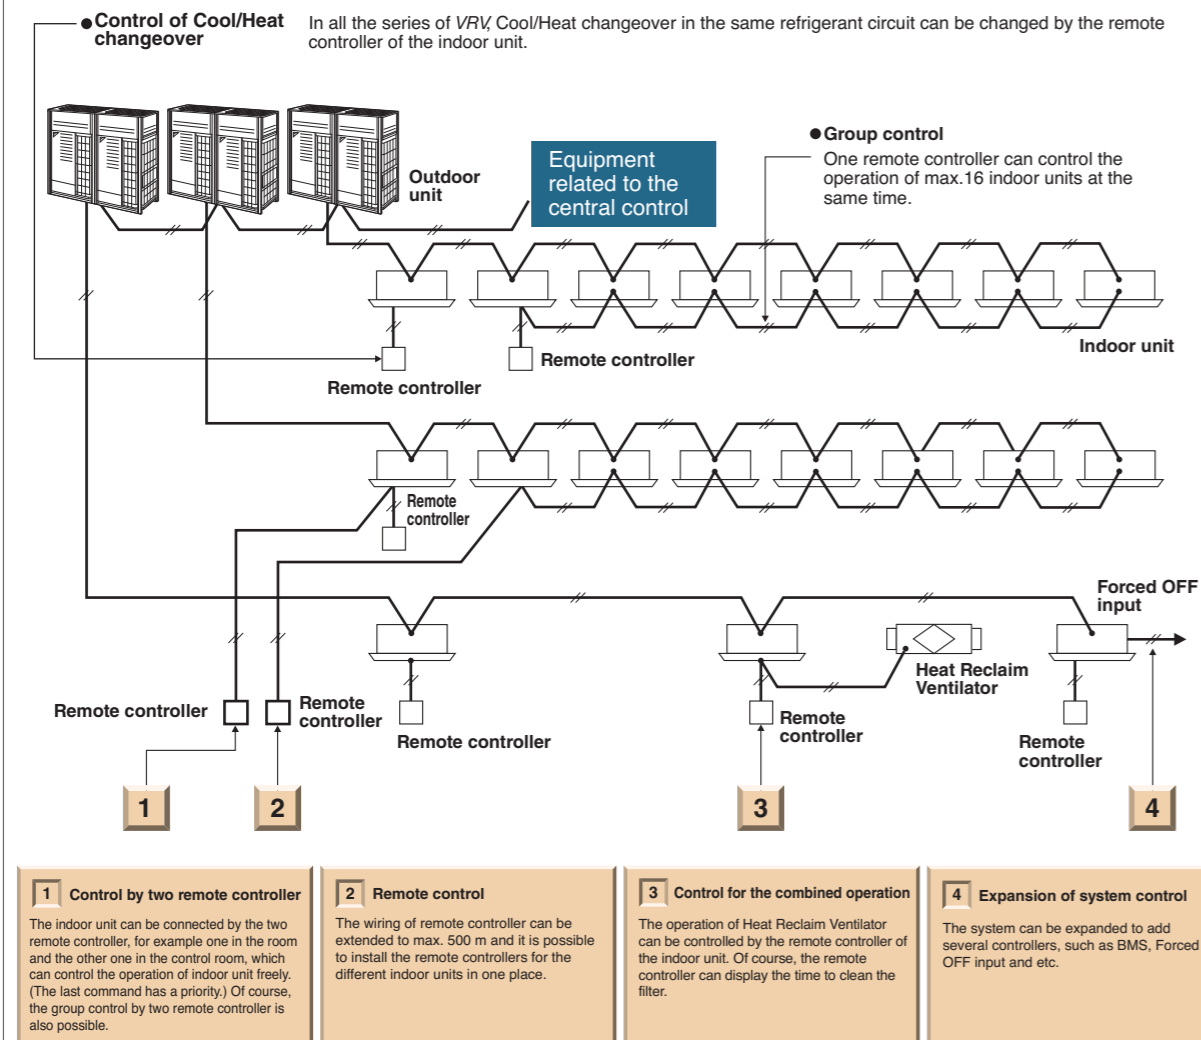

### Wide variation of remote controllers for VRV indoor units

	FXFQ	FXZQ	FXUQ	FXCQ	FXKQ	FXDQ	FXSQ	FXMQ	FXHQ	FXAQ	FXL(N)Q
<b>Navigation remote controller</b> (Wired remote controller) (BRC1E62)	●	●	●	●	●	●	●	●	●	●	●
<b>Wired remote controller</b> (BRC1C62)	●	●	●	●	●	●	●	●	●	●	●
<b>Wireless remote controller*</b> (Installed type signal receiver unit)	●	●	●	●					●	●	
<b>Wireless remote controller*</b> (Separate type signal receiver unit)					●	●	●	●			●
<b>Simplified remote controller</b> (Exposed type) (BRC2C51)						●	●	●			●
<b>Simplified remote controller</b> (Concealed type: for Hotel use) (BRC3A61)						●	●	●			●

\*Refer to page 69 for the name of each model.


## Integrated Building Monitoring System

The high speed transmission of DIII-NET enables more advanced control of the VRV system, providing you with enhanced comfort.

- DIII-NET Line
- BACnet®/Ethernet or LonWORKS® Network Communication Line
- - - Contact Signal Line
- RS485 Modbus Line

The DIII-NET system provides for:

- Close control and monitoring by integrating a wide variety of air-conditioners in the entire building.
- Saving the in-building cabling using non-polar, two-wire cables. Easier wiring work with tremendously fewer wiring errors.
- Additional setups readily up and running. An extendable cabling up to 2 km in total.
- Different control equipment flexibly joined in the system for hierarchical risk diversification.
- Daikin's total heat exchangers and other devices under integral control.

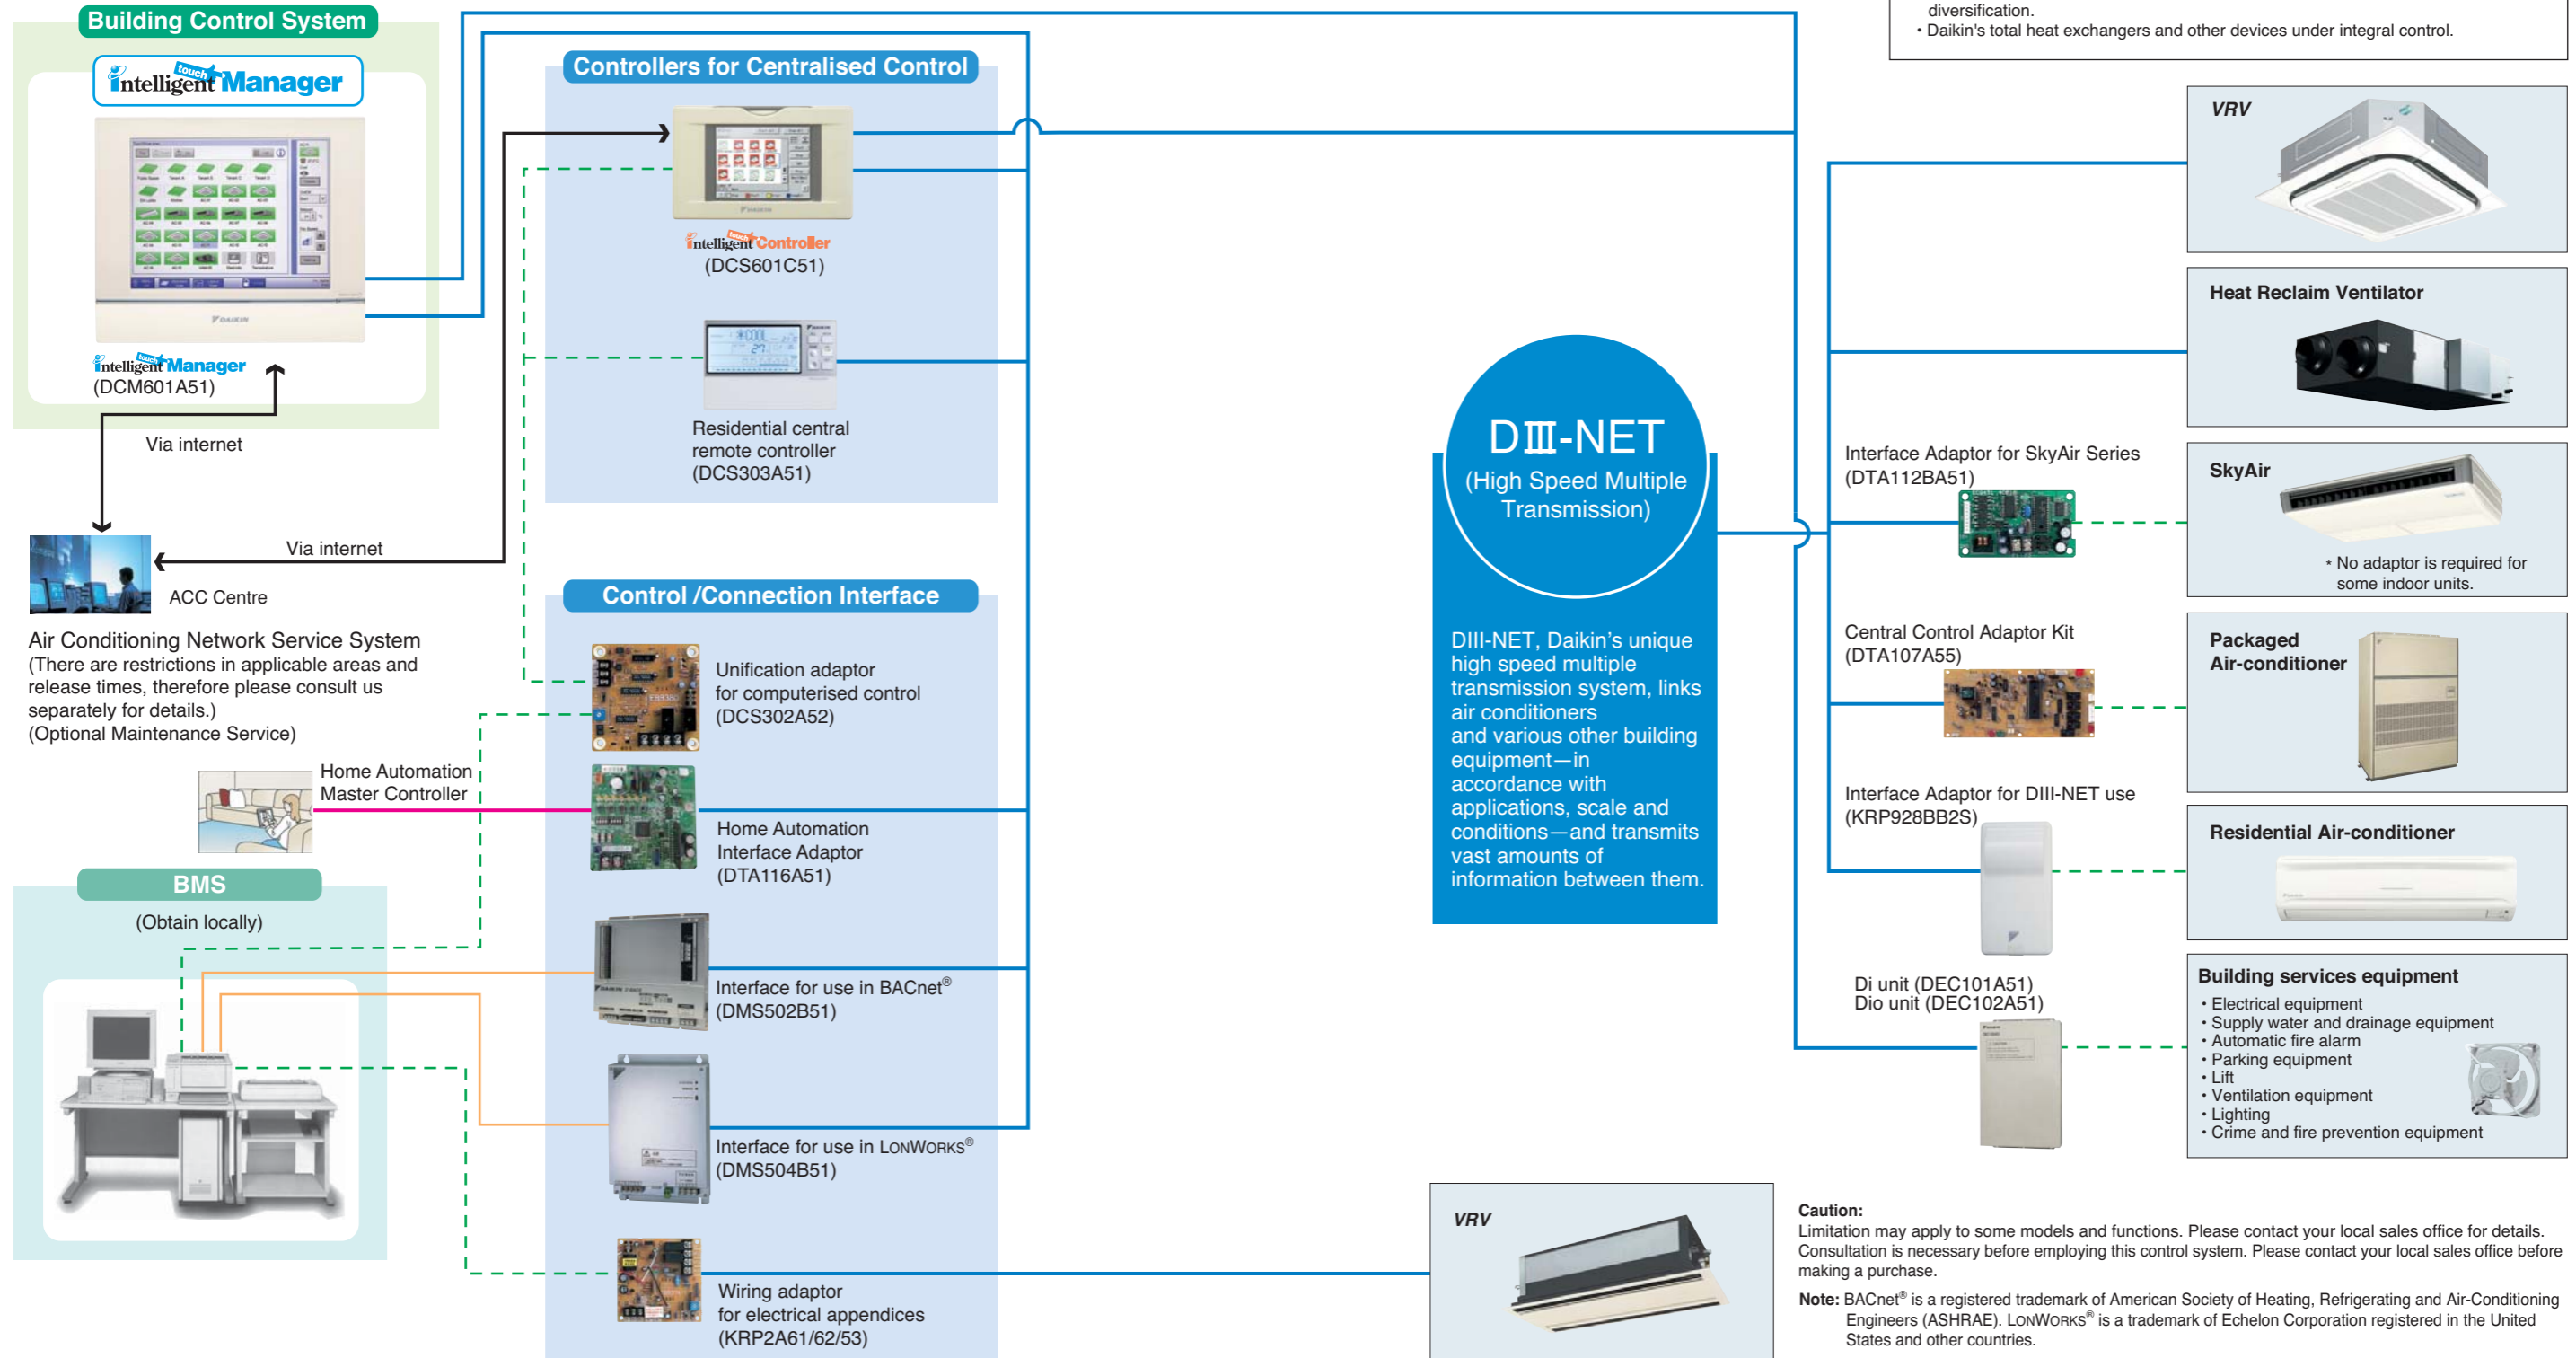

Air Conditioning Network Service System  
(There are restrictions in applicable areas and release times, therefore please consult us separately for details.)  
(Optional Maintenance Service)

Home Automation Master Controller

BMS  
(Obtain locally)



**Caution:**  
Limitation may apply to some models and functions. Please contact your local sales office for details. Consultation is necessary before employing this control system. Please contact your local sales office before making a purchase.

**Note:** BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). LONWORKS® is a trademark of Echelon Corporation registered in the United States and other countries.

## Advanced Control Systems for VRV Indoor Units



One touch selection enables flexible control of equipment in a building.



DCM009A51

Various types of equipment in a building can be controlled by a single controller.


### Individual air-conditioning control

The flexible control achieved by the VRV system precisely meets different air conditioning needs in each room (e.g. offices, conference rooms, hotel rooms).





### Lighting control DALI-compatible

DALI-compatible LED lighting systems can be controlled and monitored. Lighting control is enhanced through an interlock function with air conditioners and other functions.

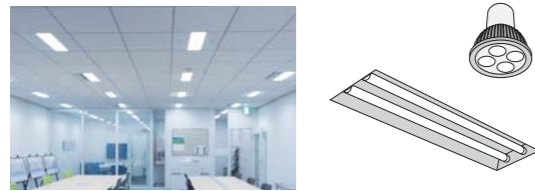


### Air-conditioning control for large spaces

Air handling units can also be controlled. Large spaces, such as entrance halls and shopping malls, can be easily controlled to ensure comfort.

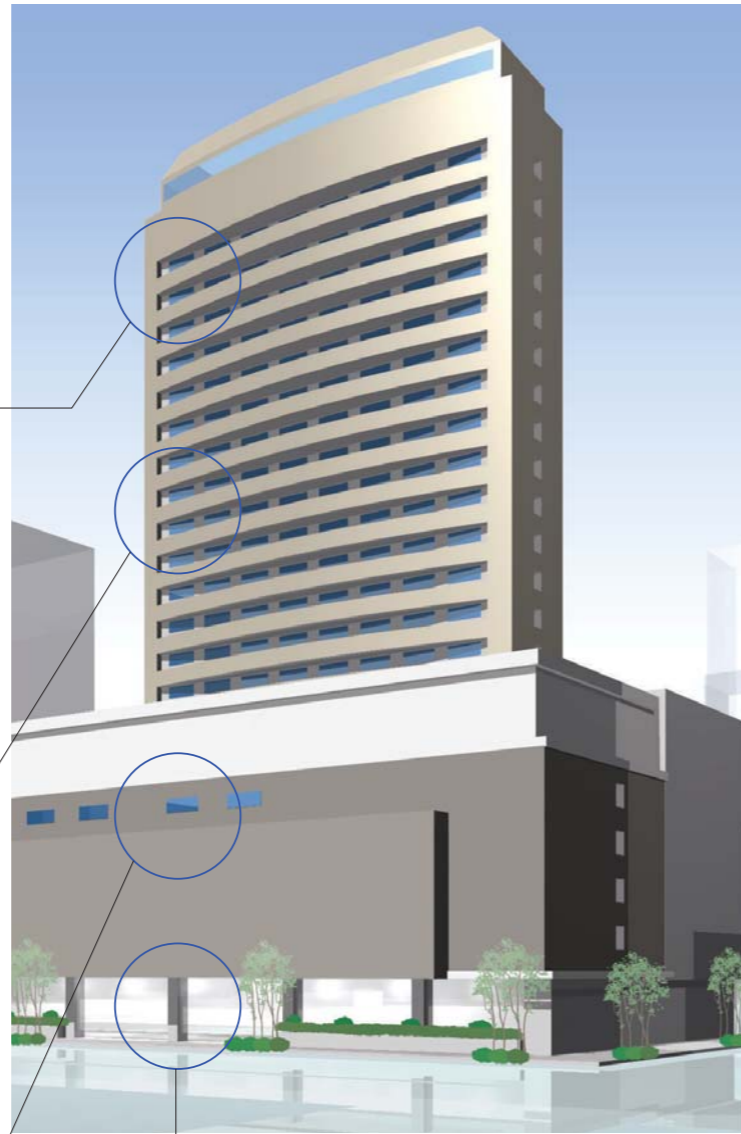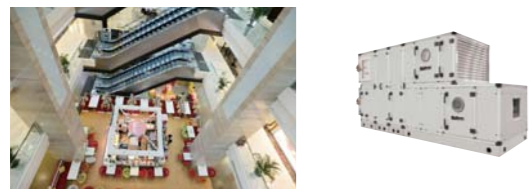

### Building equipment control

Various types of equipment other than air conditioners, including ventilators, fans, and pumps, can also be controlled.



Pump

Fan

## For Energy Saving & Comfort

*intelligent Touch Manager* maximises the advantages of VRV features

*intelligent Touch Manager* is an advanced multi-zone controller that provides the most cost-effective way to control and monitor the Daikin VRV system.

The 10.4" LCD touch screen is easy to use with three different screen views to include the floor plan layout view, icon view and list view and menus for system configurations.

It is also easy to use with standardized remote Web Access from your PC.

It can manage a total of 650 management points consisting of up to 512 Daikin indoor unit groups ( up to 1024 indoor units ) along with building equipment control / monitoring with Digital Inputs / Output ( Di/Dio ) , Analog Inputs / Output ( Ai/Ao ) and Pulse input ( Pi ) optional devices.

Schedule the operation time for each application.	Define the setpoint range that users can change.
	<p><b>With Remote controller</b></p> <p><b>With Control System</b></p>
<p><b>Turn the unit OFF if a user didn't.</b></p>	<p><b>Reset setpoint regularly.</b></p>



## Advanced Control Systems for VRV Indoor Units

In addition to switching lights on and off, advanced lighting control, such as illuminance adjustment, can be achieved

### Lighting control (Option)

#### Connection to DALI - compatible lighting control system

Simple wiring (daisy chain) enables management of LED lighting by the *intelligent Touch Manager*.

Various air conditioning and lighting control is enabled through the interlock with occupancy sensors and illuminance sensors.

### DALI-compatible


Please contact your local sales office for details.

#### Lighting control achieved by the *intelligent Touch Manager*

- [ Operation ]
- Switch-on/switch-off operation
  - Illuminance (1-100%) control
  - Various illuminance patterns can be registered
  - Registered pattern can be selected from *intelligent Touch Manager*

- [ Monitoring ]
- Switch-on/switch-off status monitoring
  - Lighting abnormality monitoring
  - Illuminance monitoring
  - DALI occupancy sensor monitoring
  - DALI illuminance sensor monitoring

Air conditioning and lighting for which power consumption is high can be efficiently controlled to promote energy conservation and cost reduction!

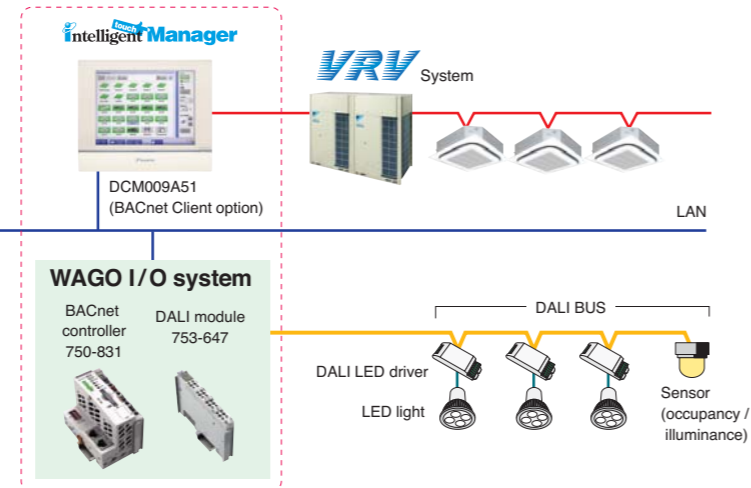

#### [ Overview of control ]

- Up to 5 DALI modules can be connected to a single BACnet controller.
- Up to 64 DALI LED drivers (64 addresses) can be connected to a single DALI module.
- 64 DALI addresses can be freely assigned to up to 16 groups using a single DALI module. (Each group corresponds to a management point of the *intelligent Touch Manager*.)
- Up to 16 scenes can be set to a single DALI module.
- Up to 12 sensors (occupancy, illuminance) can be connected to a single DALI module.
- DALI BAS simplifies wiring and setting work by daisy chain wiring and automatic address setting.

## Easy maintenance and energy saving by lighting control

### Case1

Switch-on / switch-off and illuminance are controlled based on a schedule to cut wasteful power consumption.

- Failing to switch off lights is prevented.




• Optimal illuminance reduces energy.

### Case2

Occupancy sensors are used to eliminate both wasteful lighting and air conditioning.


When a room is unoccupied, the air conditioning stops and the lighting is switched off.

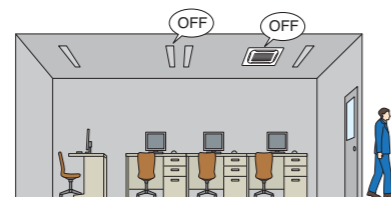

### Case3

Lighting abnormalities (e.g. burned-out bulbs) can be checked on the *intelligent Touch Manager* screen.

Lighting maintenance becomes easier and quicker.



The layout screen enables quick identification of specific locations.

## Tenant Management ( PPD\*Option )

Reporting the power consumption of VRV system for each tenant

With the PPD function, power consumption can be calculated for each indoor unit (Option)

The energy consumption is proportionally calculated for each indoor unit. The data can be used for energy management and calculation of air conditioning usage fees for respective tenants.


Operational information of individual indoor units are monitored, based on distribution of power consumption of outdoor units.

Daikin's PPD keeps track of power distribution for each indoor unit. It performs air conditioning billing calculations quickly and automatically.

#### It is easy to output PPD data.

PPD data is output in CSV format to a PC or USB memory device and can be freely processed and managed.


\*PPD (Power Proportional Distribution) is Daikin's proprietary calculation method.

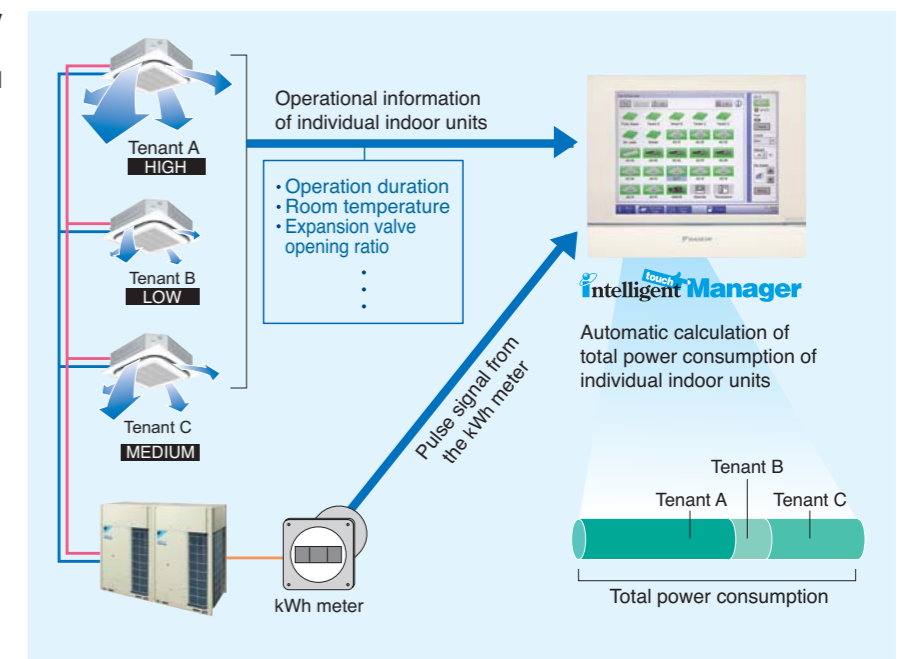

## Air conditioning bills can be issued by one click



Electricity bills can be easily calculated for each tenant (Option)

The power consumption of VRV controlled by the *intelligent Touch Manager* can be easily managed for each tenant using a PC. The electricity bill settings facilitate billing work through easy calculation and issuance of VRV electricity bills.

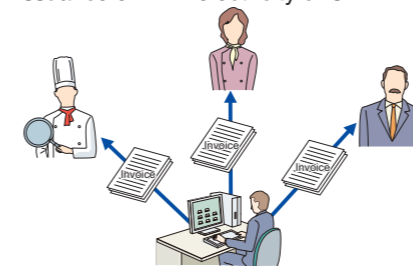

#### [ Main functions ]

- Register tenants
- Set the electricity unit price for 5 time zones
- Calculate power consumption and electricity charge for each tenant
- Show aggregation results in the specified period for each tenant
- Output the results (Printout and CSV file)

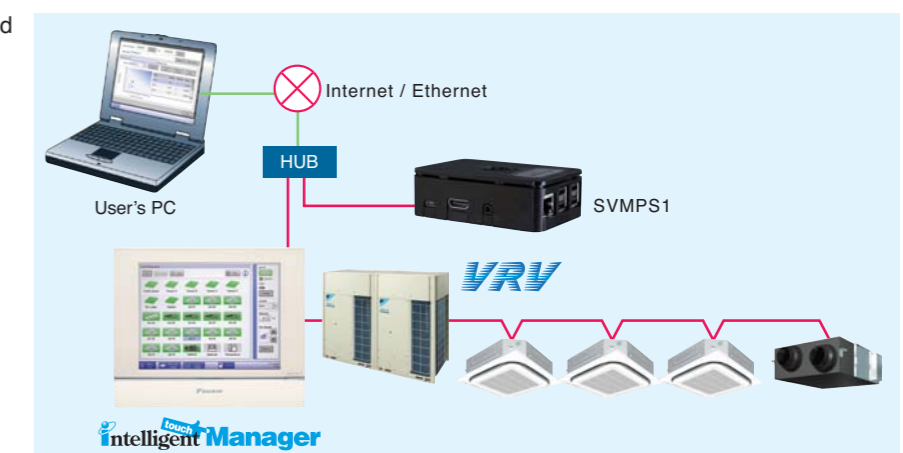

Tenant registration screen



Setup screen




VRV electricity bill screen

## Advanced Control Systems for VRV Indoor Units

### System structure

#### intelligent Touch Manager System Overview

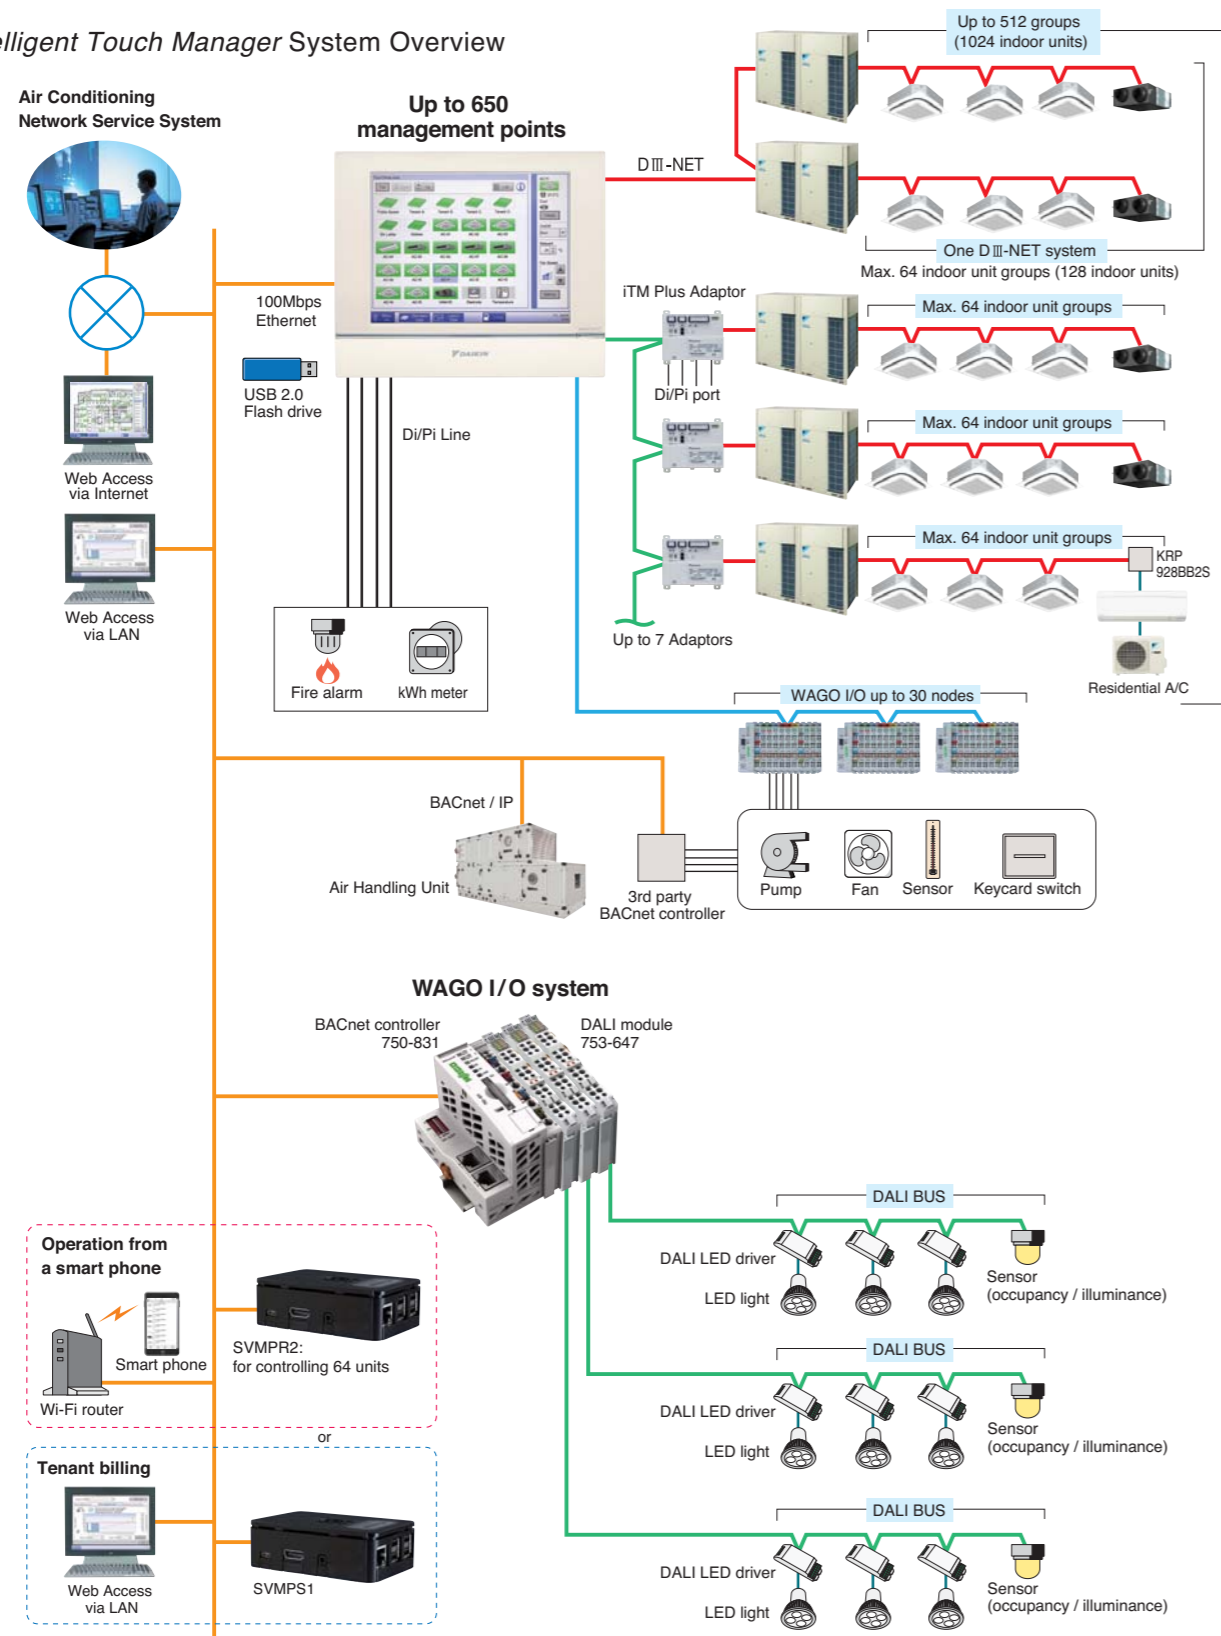


### Air Conditioning Network Service System

#### Preventive Maintenance

The *intelligent Touch Manager* can be connected to Daikin's own Air Conditioning Network Service System for remote monitoring and verification of operation status for VRV system. By its ability to predict malfunctions, this service provides customers with additional peace of mind.

#### Enhanced convenience with link to the Air Conditioning Network Service System

The *intelligent Touch Manager* connects seamlessly to Daikin's 24-hour Air Conditioning Network Service System.

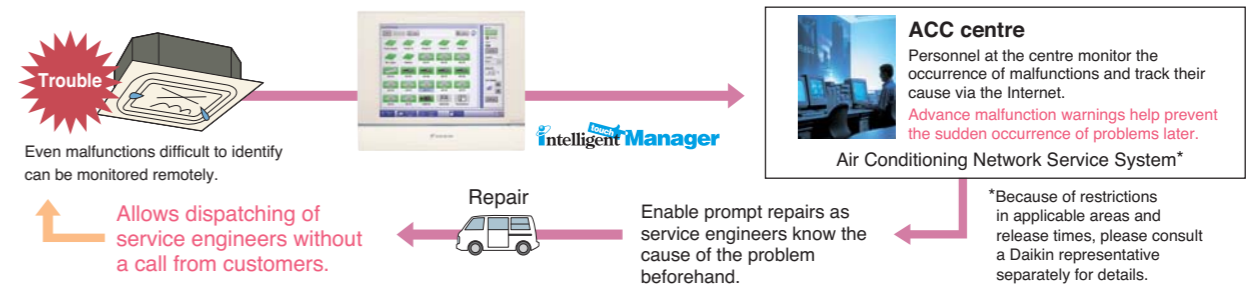

### Daikin Offers a Variety of Control Systems

#### Convenient controllers that offer more freedom to administrators



#### intelligent Touch Controller


Ease of use and expanded control functions

The user-friendly controller features colours, multilingual function, and icons in the display for ease of understanding. A wide variety of control methods can be accommodated, permitting administrators to monitor and operate the system even when they are away from the controller.


DCS601C51

#### Connect VRV system to your BMS via BACnet® or LONWORKS®

Compatible with BACnet® and LONWORKS®, the two leading open network communication protocols, Daikin offers interfaces that provide a seamless connection between VRV system and your BMS.

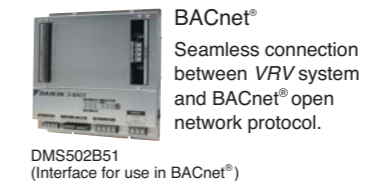

DMS502B51 (Interface for use in BACnet®)

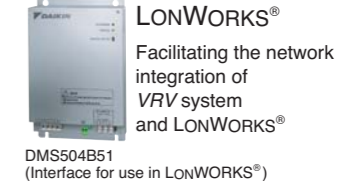

DMS504B51 (Interface for use in LONWORKS®)

Note: 1. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).  
2. LONWORKS® is a trademark of Echelon Corporation registered in the United States and other countries.


Dedicated interfaces make Daikin air conditioners freely compatible with open networks

### Smart phone will be a remote controller of VRV system (Option)

#### For house VRV Smart Phone Control System

Up to 64 indoor units can be controlled.

Just add SVMPR2 to this system

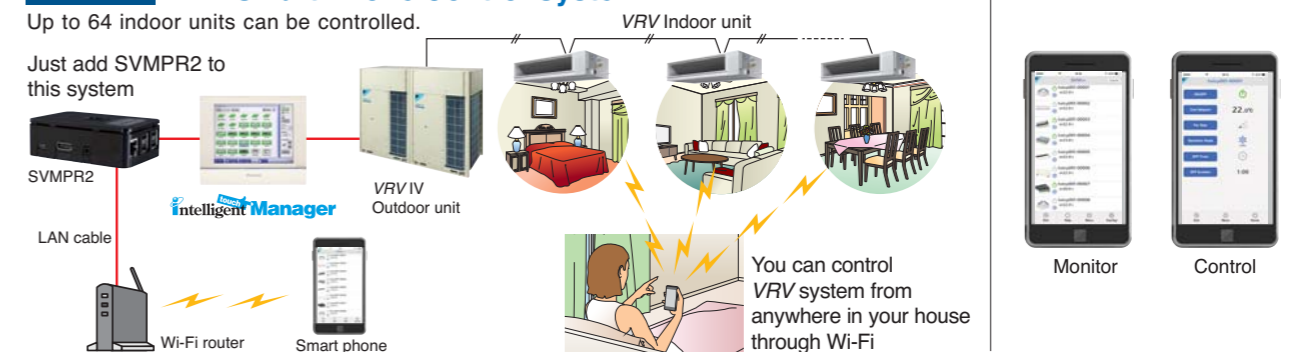


## Advanced Control Systems for VRV Indoor Units

### Home Automation Interface Adaptor

The VRV system can be operated from the home automation system.

Image to use Home Automation Interface Adaptor DTA116A51

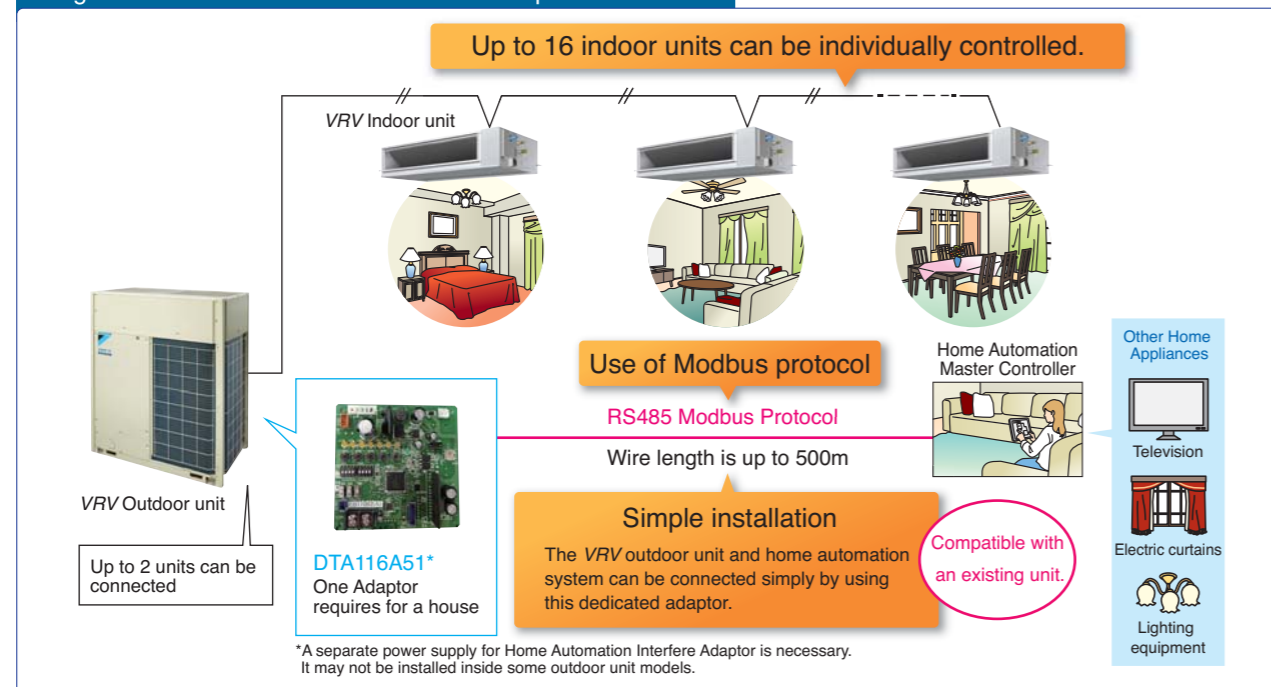


### Functions


Monitor		Control	
On/Off	On/Off status of indoor units	On/Off	On/Off control of indoor units
Operation mode	Cooling, Heating, Fan, Dry, Auto (depend on indoor unit capability)	Operation mode	Cooling, Heating, Fan, Dry, Auto (depend on indoor unit capability)
Setpoint	Setpoint of indoor units	Setpoint	Cooling/Heating setpoint
Room temperature	Suction temperature of indoor units	Fan direction	Swing, Stop, Flap direction (depend on indoor unit capability)
Fan direction	Swing, Flap direction (depend on indoor unit capability)	Fan volume	L, M, H (depend on indoor unit capability)
Fan volume	L, M, H (depend on indoor unit capability)	Filter sign reset	Reset filter sign of indoor units
Forced off status	Forced off status of indoor units	<b>Retrieve system information</b>	
Error	Malfunction, Warning with Error code	Connected indoor units	DIII-NET address of connected indoor units can be retrieved.
Filter sign	Filter sign of indoor units	Indoor unit capabilities	Indoor unit capabilities such as operation mode, fan control, setpoint HV can be retrieved.
Communication status	Communication normal/error of indoor units		

### VRV Smart Phone Control System

VRV Smart Phone Control System can be realized by SVMPR1 which is a new product to utilize DTA116A51.

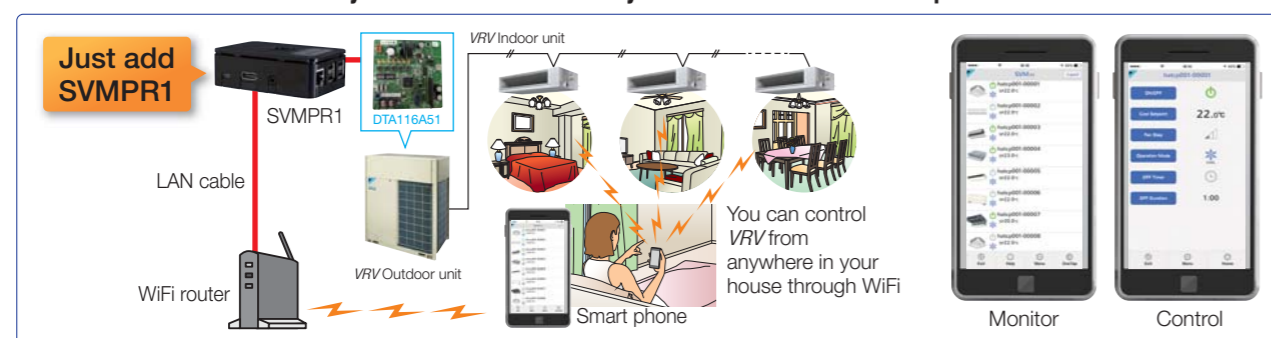

Daikin's air treatment systems creating a higher air quality environment



\*Refers to bringing outdoor air to near indoor temperature and delivering to a room.

A recent trend rapidly gaining popularity is for air treatment to be required as well as air conditioning. Daikin's Outdoor-Air Processing Unit can combine fresh air treatment and air conditioning, supplied from a single system. It adjusts the temperature of air from outdoors using a fixed discharge temperature control. Along with Outdoor-Air Processing Units, we also offer Heat Reclaim Ventilator systems. The Heat Reclaim Ventilator VAM-GJ series units in particular have been praised for their compactness, energy conservation and extensive operation range of outdoor temperatures. This series provides higher enthalpy efficiency<sup>★1</sup>, due to the greatly enhanced performance of the thin film element. Furthermore, improved external static pressure<sup>★2</sup> offers more flexibility for installation. The Heat Reclaim Ventilator VKM-GAM series units, equipped with a DX-coil and a humidifier, provide further advanced features, such as temperature adjustment to suit conditions indoors and to prevent cold air from blowing on people directly during heating operation. The series also realises significant energy savings by exercising heat recovery.

★1 For models: VAM150/250/350/650/800/1000/2000GJVE  
★2 For models: VAM150/350/500GJVE

	Outdoor-Air Processing Unit	Heat Reclaim Ventilator		
		VKM-GAM Type	VKM-GA Type	VAM-GJ Type
Connections with VRV IV	Refrigerant Piping	Connectable	Connectable	Not connectable
	Wiring	Connectable	Connectable	Connectable
	After-cool & After-heat Control	Available	Available	Not available
Heat Exchange Element	—	Energy savings obtained	Energy savings obtained	Energy savings obtained
Humidifier	—	Fitted	—	—
High Efficiency Filter	Option	Option	Option	Option
Ventilation System	Air supply only	Air supply & air exhaust	Air supply & air exhaust	Air supply & air exhaust
Power Supply	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V/220 V, 50 Hz/60 Hz
Airflow Rate				150 m <sup>3</sup> /h
				250 m <sup>3</sup> /h
			500 m <sup>3</sup> /h	350 m <sup>3</sup> /h
			500 m <sup>3</sup> /h	500 m <sup>3</sup> /h
			500 m <sup>3</sup> /h	650 m <sup>3</sup> /h
			800 m <sup>3</sup> /h	800 m <sup>3</sup> /h
		1080 m <sup>3</sup> /h	1000 m <sup>3</sup> /h	1000 m <sup>3</sup> /h
	1680 m <sup>3</sup> /h		1500 m <sup>3</sup> /h	
	2100 m <sup>3</sup> /h		2000 m <sup>3</sup> /h	

\*Refers to bringing outdoor air to near indoor temperature and delivering to a room.

## Outdoor-Air Processing Unit


Combine fresh air treatment and air conditioning, supplied from a single system.

### Lineup

Model Name	FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Capacity Index	125	200	250




Fresh air treatment and air conditioning can be achieved with a single system by using heat pump technology—without the usual troublesome air supply and air discharge balance design. Fan coil units for air conditioning and an outdoor-air processing unit can be connected to the same refrigerant line. The results are enhanced design flexibility and a significant reduction in total system costs.

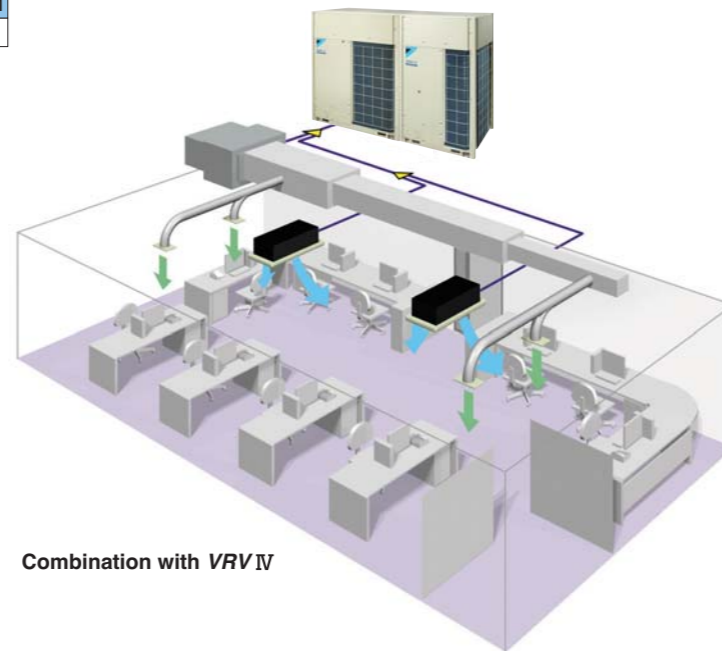

Combination with VRV IV

Air conditioning and outdoor air processing can be accomplished using a single system.

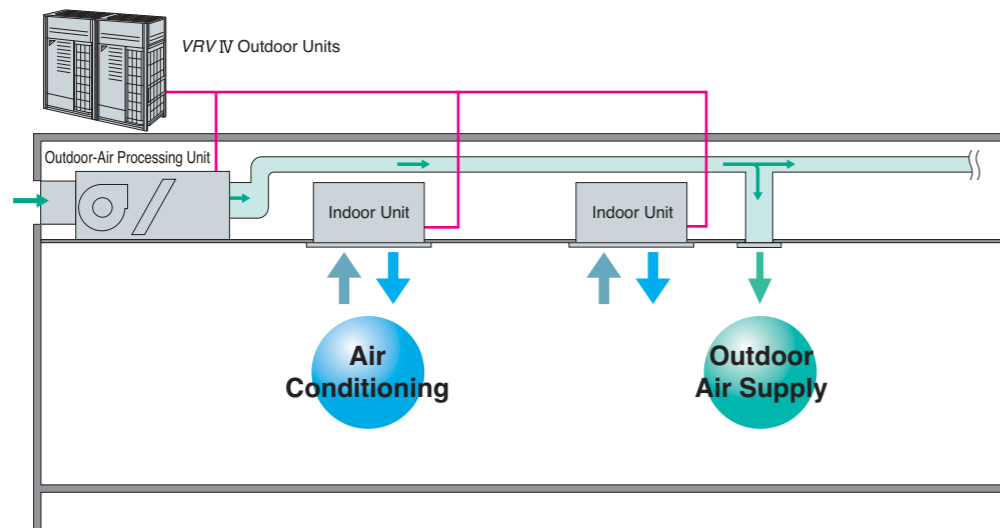

### Connection Conditions

The following restrictions must be observed in order to maintain the indoor units connected to the same system.


- When outdoor-air processing units are connected, the total connection capacity index must be 50% to 100% of the capacity index of the outdoor units.
- When outdoor-air processing units and standard indoor units are connected, the total connection capacity index of the outdoor-air processing units must not exceed 30% of the capacity index of the outdoor units.
- Outdoor-air processing units can be used without indoor units.

- The unit introduces outdoor air and adjusts the outdoor air temperature via fixed discharge temperature control, thereby reducing the air conditioning load.
- The system can operate with outdoor-air temperatures ranging from -5 to 43°C. Heating performance is somewhat adversely affected when the outdoor-air temperature is 0°C or below.
- When shipped from the factory, the thermostat is set at 18°C for cooling and 25°C for heating. The set temperature can be varied within the range of 13–25°C during cooling operation, and 18–30°C during heating operation, in the local setting mode using the wired remote controller. The temperature, however, is not displayed on the remote controller.
- While in machine protection mode and depending on outdoor air conditions, discharge air temperature may not be at the set temperature.
- The fan stops when operating in defrosting, oil returning and hot start operations. The fan also may stop due to mechanical protection control.
- Ceiling mounted duct units with three differing capacities are available. These can be connected to VRV series outdoor units to meet a variety of different requirements.

### Airflow rate

FXMQ125MFV1	1,080 m <sup>3</sup> /h
FXMQ200MFV1	1,680 m <sup>3</sup> /h
FXMQ250MFV1	2,100 m <sup>3</sup> /h

- Optional equipment includes long-life filters.
- Compatible with outdoor temperatures from -5°C to 43°C.

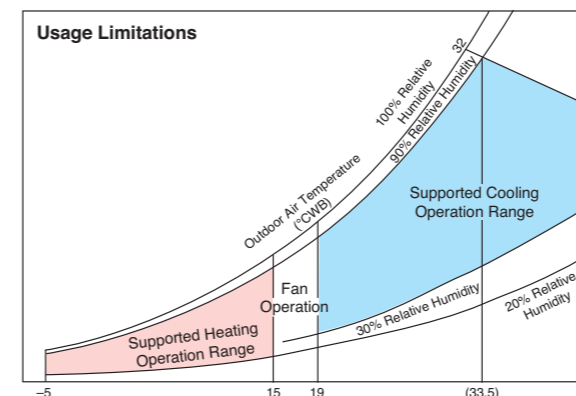

### Note:

1. The data shown in the graph illustrates the supported operation ranges under the following conditions.  
Indoor and Outdoor Unit  
Effective piping length: 7.5 m  
Height differential: 0 m
2. The discharge temperature can be set using the remote controller. However, the actual temperature may not match the temperature setting under some circumstances due to the outdoor-air processing load or mechanical protection controls.
3. The system will not operate in fan mode when the outdoor air temperature is 5°C or below.

- High-performance filters with dust collection efficiencies (JIS calorimetry) of 90% and 65% are also available as options.

- As with the VRV IV system, a variety of control systems can be deployed, including remote control from distances of up to 500 m.



BRC1E62  
Navigation remote controller (Wired remote controller) (option)

- Group control is not possible between this unit and standard type indoor units. Connect remote controllers to each unit.

- The “self-diagnosis function” indicates the occurrence and nature of abnormalities in the system by displaying codes on the remote controller.

- A central control system compatible with the VRV IV system can be installed.



DCS302CA61  
Central remote controller (option)

- It is not possible to change the discharge air temperature settings from the central control system.
- Do not associate this equipment into zones with standard indoor units, as central control will not be possible.

- As with the VRV IV system, the equipment employs the “super wiring system” so that the wiring linking indoor and outdoor units can also be utilised for central control.

### Note:

- Linked control of the product and the Heat Reclaim Ventilator is not supported.
- This equipment is intended for the treatment of outdoor air only. It is not to be used for maintaining indoor air temperature. Install and use with standard indoor units. Be sure to position the air discharge openings of the product in positions where the airflow will not blow on people directly. When outdoor-air processing is in excess, the unit switches to thermo-off mode, and outdoor air flows into the room directly.
- For outdoor ducts, be sure to provide heat insulation to prevent condensation.
- Group control of the product and the standard indoor units is not supported. A separate remote controller should be connected to each individual unit.
- The system will not operate in fan mode when the outdoor air temperature is 5°C or below.
- If the product is allowed to operate 24 hours a day, maintenance (part replacement, etc.) must be performed periodically.
- Temperature setting and Power Proportional Distribution (PPD) are not possible even if the intelligent Touch Controller or the intelligent Touch Manager is installed.
- The remote controller wired to the outdoor-air processing unit must not be set as the master remote controller. Otherwise, when set to “Auto,” the operation mode will switch according to the outdoor air conditions, regardless of the indoor temperature.

## Standard specifications

### Indoor unit

Type		Ceiling Mounted Duct Type		
Model		FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Power supply		1-phase 220-240 V (also required for indoor units), 50 Hz		
Cooling capacity *1	kcal/h	12,000	19,300	24,100
	Btu/h	47,800	76,400	95,500
	kW	14.0	22.4	28.0
Heating capacity *1	kcal/h	7,700	12,000	15,000
	Btu/h	30,400	47,400	59,400
	kW	8.9	13.9	17.4
Power consumption	kW	0.359	0.548	0.638
Casing		Galvanised steel plate		
Dimensions (HXWXD)		470X744X1,100		470X1,380X1,100
Fan	Motor output	kW		
	Airflow rate	m <sup>3</sup> /min		
		cfm		
External static pressure	Pa			
Air filter		*2		
Refrigerant piping	Liquid	mm		
	Gas	mm		
	Drain	mm		
Machine weight	kg	86	123	
Sound level *3	220 V/240 V	dB(A)		
Connectable outdoor units *4		6 HP and above		8 HP and above
Operation range (Fan mode operation between 15 and 19°C)	Cooling	19 to 43°C		
	Heating	-5 to 15°C		
Range of the discharge temperature *5	Cooling	13 to 25°C		
	Heating	18 to 30°C		

Note: \*1. Specifications are based on the following conditions:  
 • Cooling: Outdoor temp. of 33°CDB, 28°CWB (68% RH), and discharge temp. of 18°CDB.  
 • Heating: Outdoor temp. of 0°CDB, -2.9°CWB (50% RH), and discharge temp. of 25°CDB.  
 • Equivalent reference piping length: 7.5 m (0 m horizontal)  
 \*2. An intake filter is not supplied, so be sure to install the optional long-life filter or high-efficiency filter. Please mount it in the duct system of the suction side. Select a dust collection efficiency (gravity method) of 50% or more.  
 \*3. Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. These values are normally somewhat higher during actual operation as a result of ambient conditions.  
 \*4. It is possible to connect to the outdoor unit if the total capacity of the indoor units is 50% to 100% of the capacity index of the outdoor units.  
 \*5. Local setting mode. Not displayed on the remote controller.  
 • This equipment cannot be incorporated into the remote group control of the VRV IV system.

## OPTIONS



### Indoor unit

Model		FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Operation/control	Operation remote controller	BRC1E62/BRC1C62		
	Central remote controller	DCS302CA61		
	Unified ON/OFF controller	DCS301BA61		
	Schedule timer	DST301BA61		
	Wiring adaptor for electrical appendices (1)	KRP2A61		
Wiring adaptor for electrical appendices (2)	KRP4AA51			
Filters	Long-life replacement filter	KAFJ371L140	KAFJ371L280	
	High-efficiency filter	Colourimetric method 65%	KAFJ372L140	
		Colourimetric method 90%	KAFJ373L140	
	Filter chamber *1	KDJ3705L140	KDJ3705L280	
Drain pump kit	KDU30L250VE			
Adaptor for wiring	KRP1B61			

Note: \*1. Filter chamber has a suction-type flange. (Main unit does not.)  
 • Dimensions and weight of the equipment may vary depending on the options used.  
 • Some options may not be usable due to the equipment installation conditions, so please confirm prior to ordering.  
 • Some options may not be used in combination.  
 • Operating sound may increase somewhat depending on the options used.

## Dimensions

### FXMQ125/200/250MFV1

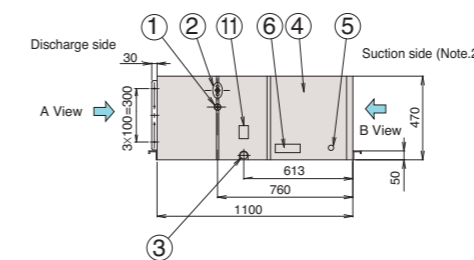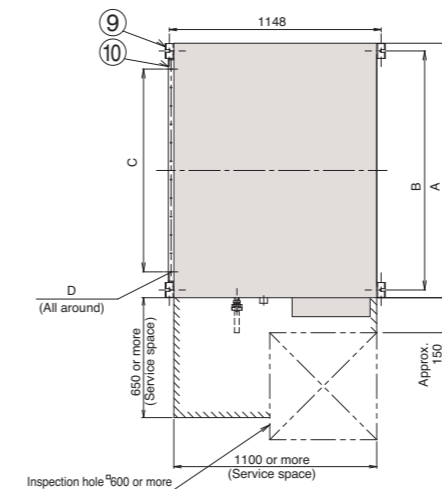

\*These diagrams are based on FXMQ200 and FXMQ250MFV1.

### Local connection piping size

Model	Gas piping diameter	Liquid piping diameter
FXMQ125MFV1	φ15.9	φ9.5
FXMQ200MFV1	φ19.1 attached piping	φ9.5
FXMQ250MFV1	φ22.2 attached piping	φ9.5

### Table of dimensions




Model	A	B	C	D
FXMQ125MFV1	744	685	5X100=500	20-φ4.7 hole
FXMQ200MFV1	1380	1296	11X100=1100	32-φ4.7 hole
FXMQ250MFV1	1380	1296	11X100=1100	32-φ4.7 hole

### Note:



- The attached piping in the diagram is for FXMQ200MFV1 and FXMQ250MFV1 only. The gas piping connection port (② in the diagram) has a different bore form with FXMQ125MFV1.
- An air filter is not supplied with this unit. Be sure to mount an air filter in the suction side. [Use a filter with dust collection efficiency of at least 50% (gravimetric method). This is available as an option.]
- For outdoor ducts, be sure to provide heat insulation to prevent condensation.

- ① Liquid pipe connection
- ② Gas pipe connection
- ③ Drain piping connection
- ④ Electric parts box
- ⑤ Ground terminal
- ⑥ Name plate
- ⑦ Power supply wiring connection
- ⑧ Transmission wiring connection
- ⑨ Hanger bracket
- ⑩ Discharge companion flange
- ⑪ Water supply port
- ⑫ Attached piping (Note. 1)

### FXMQ200/250MFV1

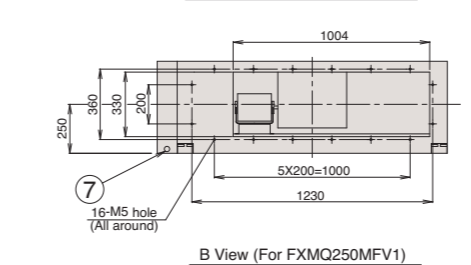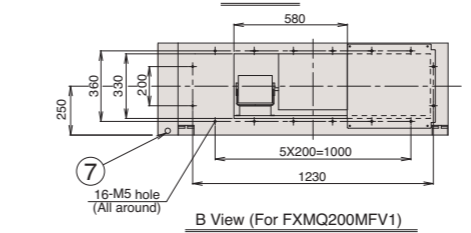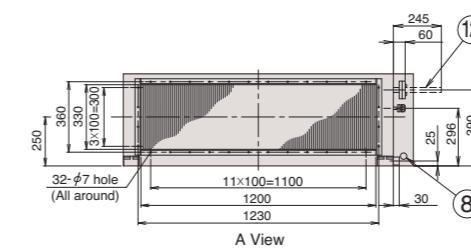


### FXMQ125MFV1

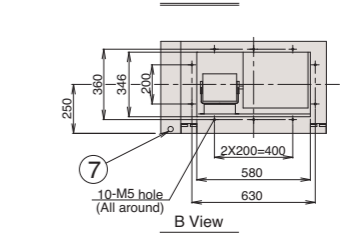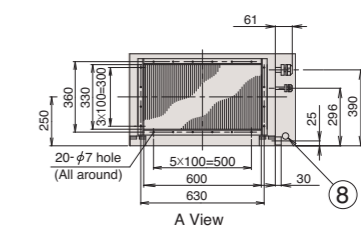

## Heat Reclaim Ventilator with DX-Coil and Humidifier — VKM series

The Heat Reclaim Ventilator lineup features the DX-coil in response to recently diversifying outdoor air introduction requirements.

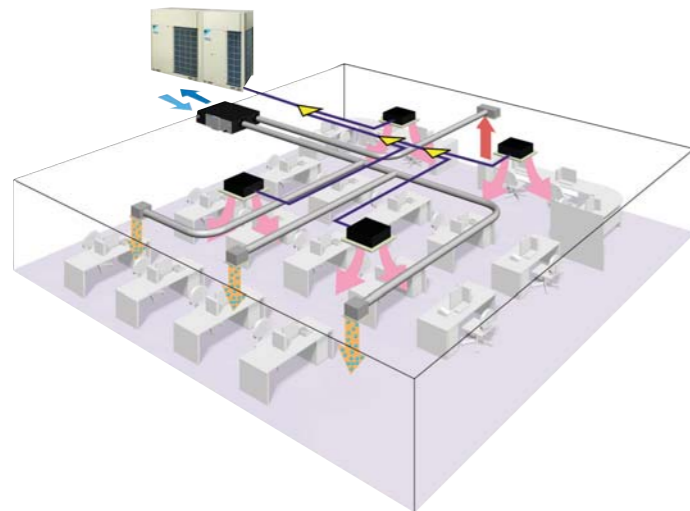

### Lineup

With DX Coil & Humidifier Type			
Model Name	VKM50GAMV1	VKM80GAMV1	VKM100GAMV1
Capacity Index	31.25	50	62.5

With DX Coil Type			
Model Name	VKM50GAV1	VKM80GAV1	VKM100GAV1
Capacity Index	31.25	50	62.5



### Humidifier

The lineup includes models with a humidifier, in response to diversifying customer requirements. (VKM50/80/100GAMV1 only)

### DX-coil

The Heat Reclaim Ventilator features DX-coil that contributes to the prevention of cold airflow hitting people directly during heating operation, due to the after-cool, after-heat operations done beforehand.


### High static pressure

High external static pressure means enhanced design flexibility.

### Efficient outdoor air introduction is possible

The Heat Reclaim Ventilator (VKM series) series introduces fresh outdoor air with minimum heat losses, while a wide variety of features respond to customer requirements.

### Air conditioning and outdoor air processing can be accomplished using a single system.

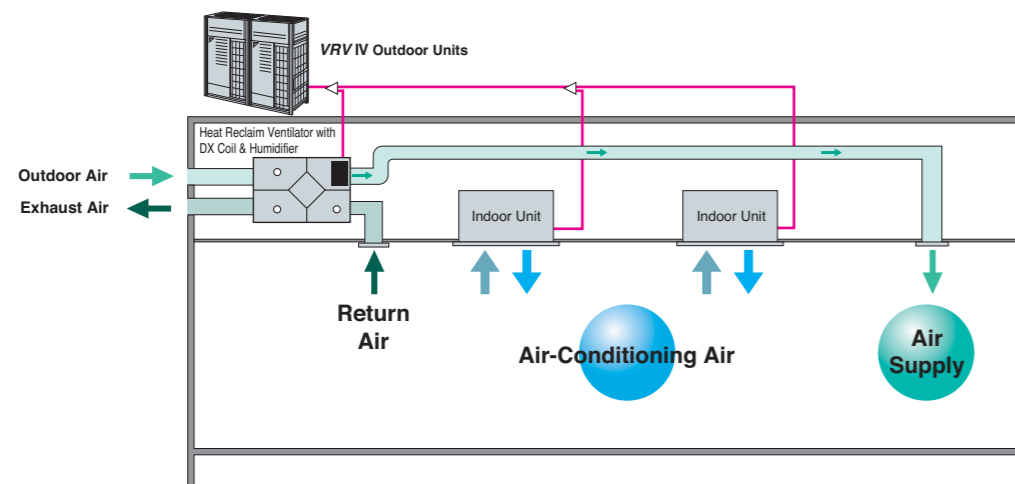


### Connection Conditions



The following restrictions must be observed in order to maintain the indoor units connected to the same system.

- When the Heat Reclaim Ventilator VKM series units are connected, the total connection capacity index must be 50% to 130% of the capacity index of the outdoor units.

### A compact unit packed with Daikin's cutting-edge technologies.

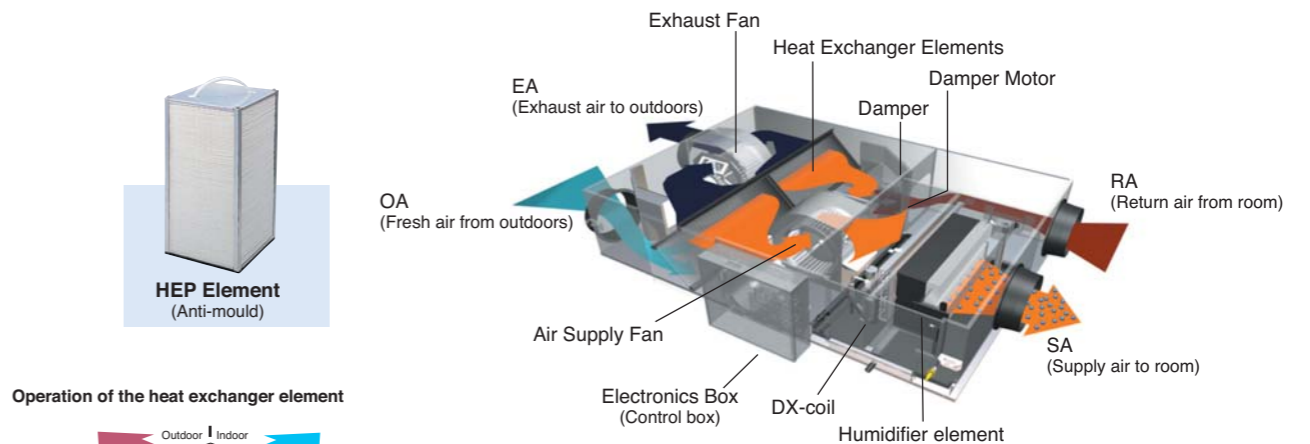

### Operation of the heat exchanger element

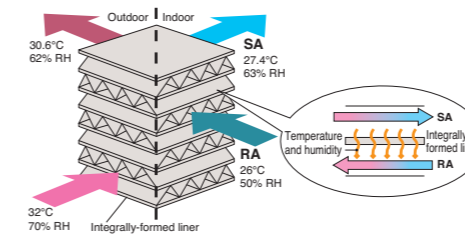


DX-coil (Direct expansion coil)



Humidifier element

### Heating and humidification process

#### Structure of VKM series

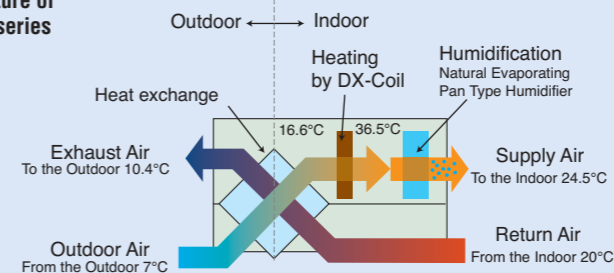

**Humidification: 5.4kg/h** (VKM100GAMV1)

The Outdoor air is heated from 16.6°C to 36.5°C with DX-coil, Natural Evaporating Pan Type Humidifier is passed and humidification capacity is improved.

DX-Coil: Heat Exchanger which heating or cooling the air by VRV outdoor unit's refrigerant.


### Efficient outdoor air introduction with heat exchanger and cooling/heating operation.

#### Indoor unit with outdoor air treatment

Using outdoor air, the temperature can be brought near room temperature with minimal cooling capacity through the use of outdoor air.

#### Other features

- Integrated system includes ventilation and humidifying operations.
- Ventilation, cooling/heating and humidifying are possible with one remote controller.

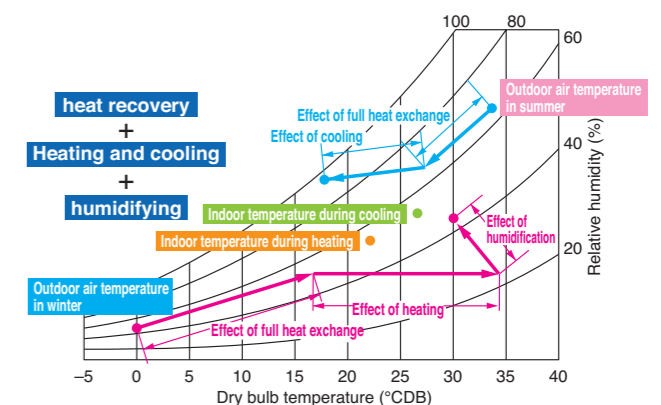



## Heat Reclaim Ventilator — VAM series

The Heat Reclaim Ventilator Creates a High-Quality Environment by Interlocking with the Air Conditioner.

Model Names

VAM150GJVE, VAM250GJVE, VAM350GJVE, VAM500GJVE, VAM650GJVE, VAM800GJVE, VAM1000GJVE, VAM1500GJVE, VAM2000GJVE




Heat Reclaim Ventilator remote controller\* BRC301B61 (Option)  
\* This remote controller is used in case of independent operation of Heat Reclaim Ventilator.

**Improved Enthalpy Efficiency\*<sup>1</sup>**  
**Higher External Static Pressure\*<sup>2</sup>**  
**Enhanced Energy Saving Functions**


This VAM series provides higher enthalpy efficiency\*<sup>1</sup>, due to the greatly enhanced performance of the thin film element. Furthermore, improved external static pressure\*<sup>2</sup> offers more flexibility for installation. Along with these three outstanding improvements, the nighttime free cooling operation contributes to energy conservation and more comfortable space.

\*<sup>1</sup> For models: VAM150/250/350/650/800/1000/2000GJVE  
\*<sup>2</sup> For models: VAM150/350/500GJVE

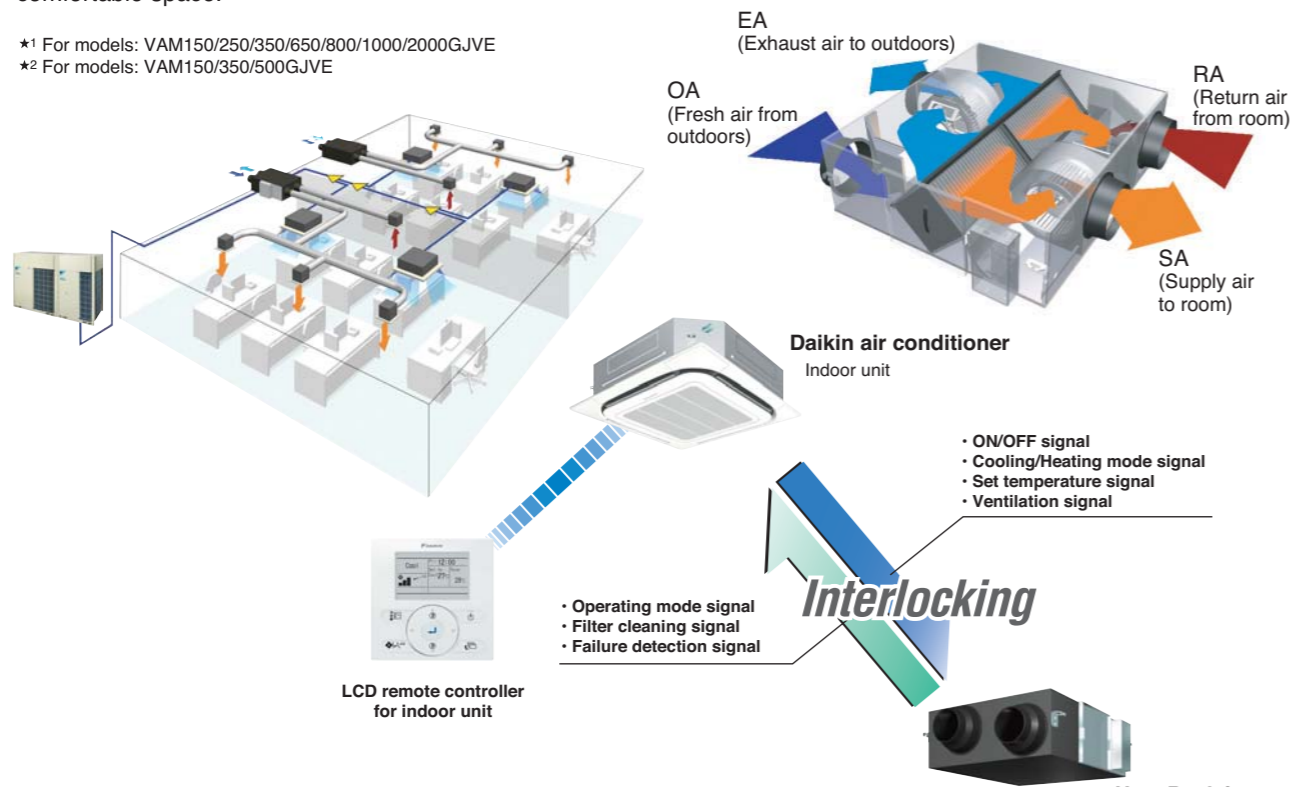

### Compact Equipment

With a height of just 306 mm, the unit easily fits in limited spaces, such as above ceilings.




### Energy Conservation

Air conditioning load reduced by approximately 31%!

### Cold Climate Compatible

Standard operation at temperatures down to -15°C.



## Air conditioning load reduced by approximately 31%!


### Total heat exchange ventilation 23%

This unit recovers heat energy lost through ventilation and curbs room temperature changes caused by ventilation, thereby conserving energy and reducing the load on the air conditioning system.

### Enthalpy efficiency drastically improved by employing thin film element! (VAM-GJ model) 6%

Due to the thinner film...  
• Decreases the moisture resistance of the partition sheets drastically.  
• Realises more space for extra layers in the element, resulting in increased effective area that supply and exhaust air can be exposed to.  
Moisture absorption increased by approx. 10%!

Thickness of the partition sheet  
**40 μm**

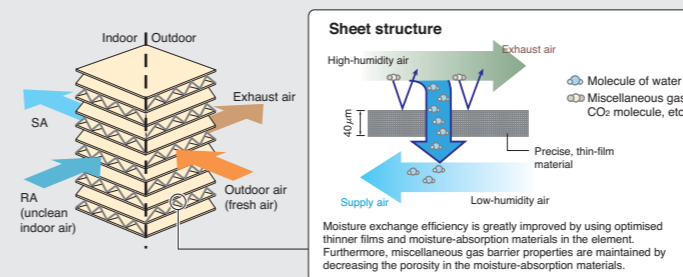


### Auto-ventilation Mode Changeover Switching 2%

Automatically switches the ventilation mode (Total Heat Exchange Mode/Bypass Mode) according to the operating status of the air conditioner.

### Pre-cool, Pre-heat Control 2%

Reduces air conditioning load by not running the Heat Reclaim Ventilator while air is still clean soon after the air conditioner is turned ON.

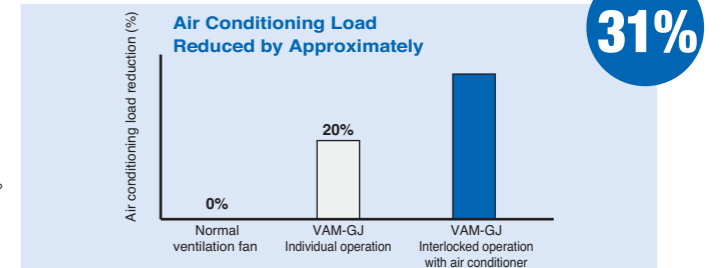

• The air conditioning load reduction values may vary according to weather and other environmental conditions at the location of the machine's installation.  
• The air conditioning load reduction values are based on the following conditions:  
Application: Tokyo office building  
Building form: 6 floors above ground, 2 floors underground, floor area 2,100 m<sup>2</sup>  
Personnel density: 0.25 person/m<sup>2</sup>  
Ventilation volume: 25 m<sup>3</sup>/h  
Indoor air conditioning level: summer 25°C 50% RH, intermediate seasons 24°C 50% RH, winter 22°C 40% RH  
Operating time: 2745 hours (9 hours per day, approx. 25 days per month)  
Calculation method: simulation based on "MICRO-HASP/1982" of the Japan Building Mechanical and Electrical Engineers Association.


## Nighttime free cooling operation\*<sup>1</sup>

Nighttime free cooling operation is an energy-conserving function that works at night when air conditioners are off. By ventilating rooms containing office equipment that raises the room temperature, nighttime free cooling operation reduces the cooling load when air conditioners are turned on in the morning. It also alleviates feelings of discomfort in the morning caused by heat accumulated during the night.

- Nighttime free cooling operation only works to cool and if connected to Building Multi or VRV systems.
- Nighttime free cooling operation is set to "off" in the factory settings, so if you wish to use it, request your dealer to turn it on.

\*<sup>1</sup> This function can be operated only when interlocked with air conditioners.  
\*<sup>2</sup> Value is based on the following conditions:  
• Cooling operation performed from April to October.  
• Calculated for air conditioning sensible heat load only (latent heat load not included).

Air conditioning sensible heat load reduced by **approx. 5%<sup>2</sup>!**

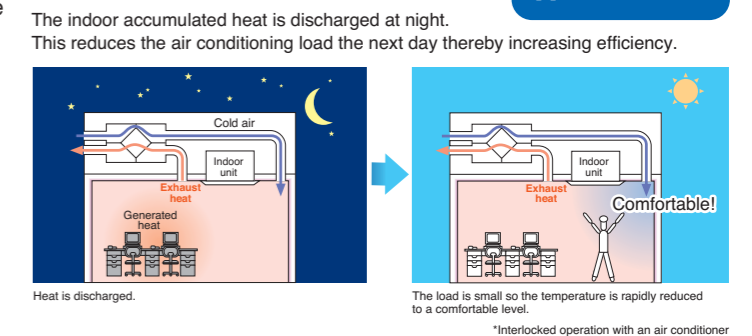





## Heat Reclaim Ventilator — VAM series

### CO<sub>2</sub> Sensor Optional Kit Connection

The CO<sub>2</sub> sensor controls airflow so that it best matches the changes in CO<sub>2</sub> level. This prevents energy losses from over-ventilation while maintaining indoor air quality with optional CO<sub>2</sub> sensor.

#### Example of CO<sub>2</sub> sensor operation in an office room:

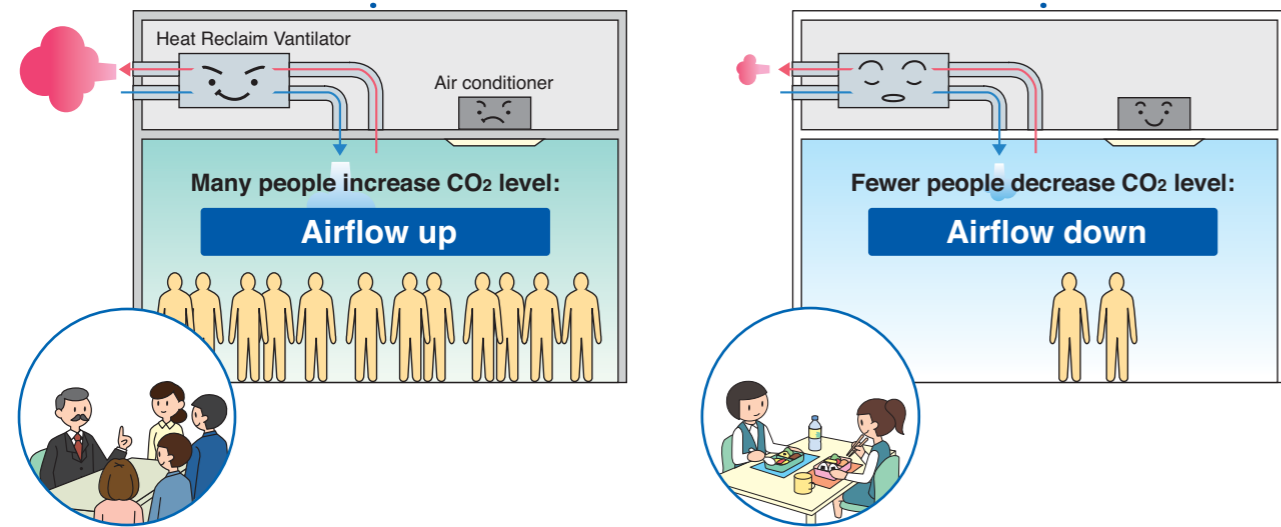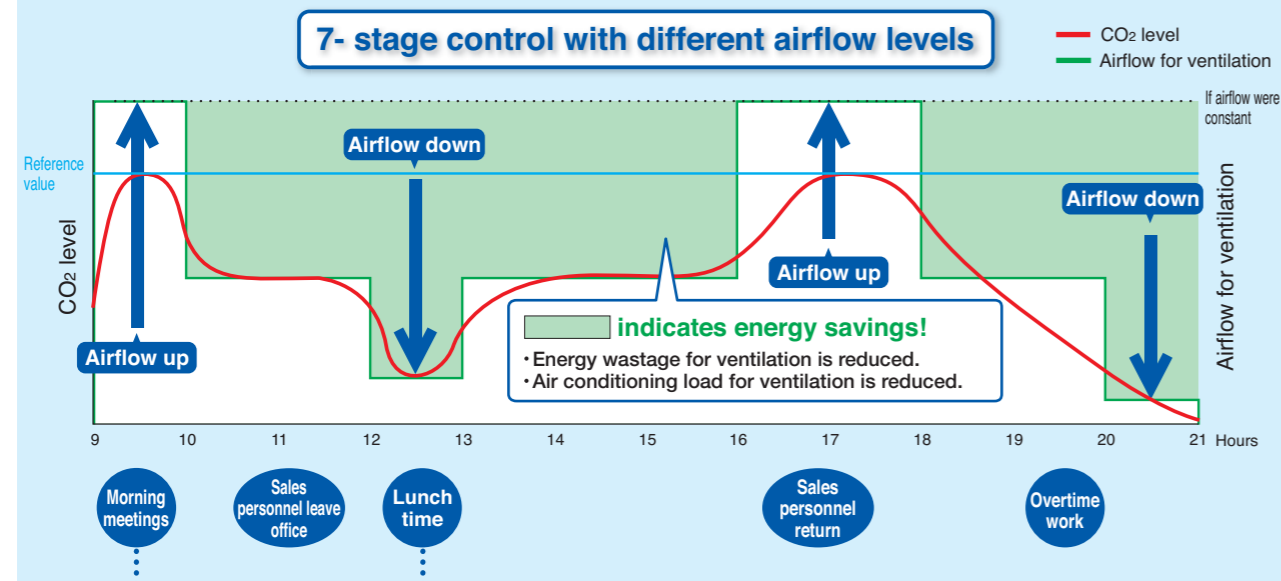

## Heat Reclaim Ventilator — PM2.5 filtration unit (Option)

Rapid urbanization has increased industrial and automobile emissions, resulting in higher PM<sub>2.5</sub> levels. This has become the source of respiratory diseases and poses a serious threat to a long term health issue. As the air quality has worsened, research has shown the harmful effects of PM<sub>2.5</sub> on the health of the general public.


### Double-layered efficient filtration

PM<sub>2.5</sub> filters are double-layered.   
 1. The front filter effectively removes large particles.   
 2. The PM<sub>2.5</sub> filter layer contains a large amount of static electricity to capture particulate matter efficiently.




### Electrostatic dust collection filter: more efficient and longer lasting effect

The PM<sub>2.5</sub> filter layer contains a large amount of static electricity to capture particulate matter efficiently, including those smaller than the grid mesh. The filter is difficult to be blocked by particles and has good ventilation and long life span.

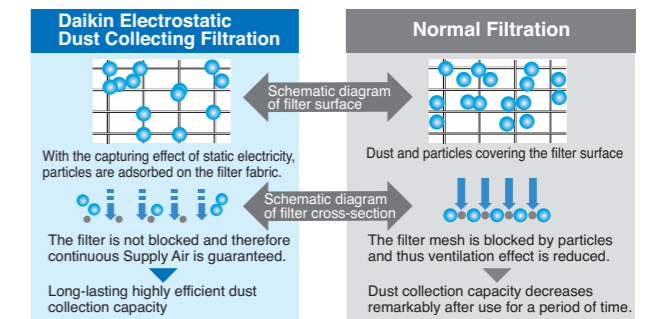


### Filtering PM<sub>2.5</sub> efficiently for healthier and more comfortable environments

The PM<sub>2.5</sub> filtering series heat reclaim ventilator is equipped with an electrostatic dust collection filter for PM<sub>2.5</sub> removal. This filter not only removes 99% or more of 2.5 μm; it also eliminates up to 90% of 0.5 μm matter!

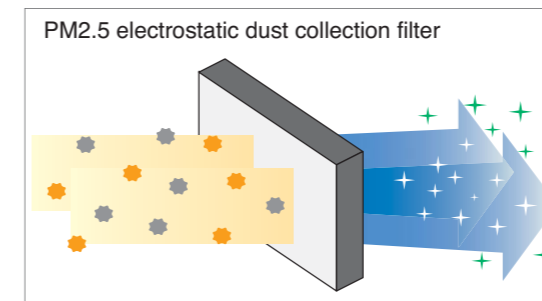

\*Test results by the Heating, Ventilation and Air Conditioning Lab at Tongji University   
 Test environment: temperature 25-26°CDB, humidity 58-60%RH

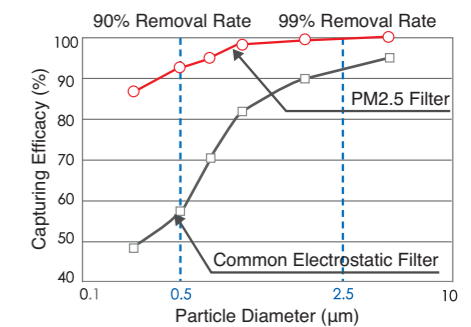

### Extra-High Performance Filter Against Sulfur Oxides and Nitrogen Oxides

#### Effective Use of Active Carbon Material to Enlarge the Adsorption Area


As an expert in the research and development of filters, DAIKIN has specifically selected active carbon material as the main substance to constitute the filter against sulfur oxides and nitrogen oxides. The material's usable pore surface is fully exploited, thus extending the filter's durability.



Note: Surface area of active carbon: 700 m<sup>2</sup>/g   
 Given a newspaper page of 40.6 cm wide by 54.6 cm long, each gram of active carbon has a surface area of 3,000 newspaper pages.

#### Intelligent Identification, Super-effective Adhesion

The special substance added in the pores of active carbon can exclusively target sulfur oxide and nitrogen oxide gases and stick to them without blocking other unidentified gases. This ensures long durability of the filter.



Note: The figures are based on in-house tests under the following lab conditions:   
 temperature 22 to 25°CDB, humidity 35 to 40% RH,   
 air flow rate 0.2 m/s.

## Specifications

### Heat Reclaim Ventilator — VAM series

MODEL		VAM150GJVE	VAM250GJVE	VAM350GJVE	VAM500GJVE	VAM650GJVE	VAM800GJVE	VAM1000GJVE	VAM1500GJVE	VAM2000GJVE		
Power Supply		1-phase, 220-240 V/ 220 V, 50/60 Hz										
Temp. Exchange Efficiency (50/60 Hz)	Ultra-High	79/79	75/75	79/79	74/74	75/75	72/72	78/78	72/72	77/77		
	High	79/79	75/75	79/79	74/74	75/75	72/72	78/78	72/72	77/77		
	Low	84/85	79/79	82/82	80/80.5	77/77.5	74/74.5	80.5/81	75.5/76	79/81		
Enthalpy Exchange Efficiency (50/60 Hz)	For Heating	Ultra-High	72/72	71/72	70/70	67/67	67.5/67.5	65/65	70/70	65/65	72/72	
		High	72/72	71/71	70/70	67/67	67.5/67.5	65/65	70/70	65/65	72/72	
		Low	76/76.5	74/74	77/77	74/74.5	71.5/72	67.5/68	72.5/73	67/67.5	76/76	
	For Cooling	Ultra-High	66/66	63/63	66/66	55/55	61/61	61/61	64/64	61/61	62/62	
		High	66/66	63/63	66/66	55/55	61/61	61/61	64/64	61/61	62/62	
		Low	70/70.5	66/66	70/70	59/59.5	64/64.5	64/64.5	68.5/69	64/64.5	66/67	
Power Consumption (50/60 Hz)	Heat Exchange Mode	Ultra-High	125/134	137/141	200/226	248/270	342/398	599/680	635/760	1,145/1,300	1,289/1,542	
		High	111/117	120/125	182/211	225/217	300/332	517/597	567/648	991/1,144	1,151/1,315	
		Low	57/58	60/59	122/120	128/136	196/207	435/483	476/512	835/927	966/1,039	
	Bypass Mode	Ultra-High	125/134	137/141	200/226	248/270	342/398	599/680	635/760	1,145/1,300	1,289/1,542	
		High	111/117	120/125	182/211	225/217	300/332	517/597	567/648	991/1,144	1,151/1,315	
		Low	57/58	60/59	122/120	128/136	196/207	435/483	476/512	835/927	966/1,039	
Sound Level (50/60 Hz)	Heat Exchange Mode	Ultra-High	27-28.5/28.5	27-29/29	31.5-33/33	33-35.5/34	34-36/36	39-40.5/39.5	39.5-41.5/39.5	39.5-41.5/41.5	41.5-43.5/42	
		High	26-27.5/27.5	26-27.5/28	30-31.5/30	31.5-34/32	33-34.5/34	37-39.5/37.5	37.5-39.5/37.5	37.5-39.5/39.5	39-43/40	
		Low	20.5-21.5/21	21-22/21	23-25/23	25-28.5/24	27.5-29.5/28	35-37.5/34	35-37.5/34.5	35-37.5/36	36-39/39	
	Bypass Mode	Ultra-High	28.5-29.5/29.5	28.5-30.5/30.5	33-34.5/34.5	34.5-36/35.5	35-37.5/37.5	40.5-42/41	40.5-42.5/40.5	41-43/42.5	43-45.5/44	
		High	27.5-28.5/28.5	27.5-29/29.5	31.5-33/31.5	33-34.5/33.5	33-35.5/35.5	38.5-40/39	38.5-40.5/38.5	39.5-41/41.5	40.5-45/42	
		Low	22.5-23.5/22.5	22.5-23/22.5	24.5-26.5/24.5	25.5-28.5/25.5	27.5-30.5/29.5	36-38.5/35.5	36-38.5/35.5	36.5-38/37.5	37.5-39.5/41	
Casing		Galvanised steel plate										
Insulation Material		Self-extinguishable polyurethane foam										
Dimensions (HXWxD)	mm	278×810×551			306×879×800		338×973×832		387×1,111×832		387×1,111×1,214	
Machine Weigh	kg	24			32		45		55		67	
Heat Exchange System	Air to air cross flow total heat (Sensible heat+latent heat) exchange											
Heat Exchange Element Material	Specially processed nonflammable paper											
Air Filter	Multidirectional fibrous fleeces											
Fan	Type	Sirocco fan										
	Airflow Rate (50/60 Hz)	Ultra-High	150/150	250/250	350/350	500/500	650/650	800/800	1,000/1,000	1,500/1,500	2,000/2,000	
		High	150/150	250/250	350/350	500/500	650/650	800/800	1,000/1,000	1,500/1,500	2,000/2,000	
		Low	100/95	155/155	230/230	320/295	500/470	700/670	860/840	1,320/1,260	1,720/1,580	
	External Static Pressure (50/60 Hz)	Ultra-High	120/154	70/96	169/222	105/150	85/125	133/170	168/192	112/150	116/140	
		High	106/131	54/65	141/145	66/52	53/67	92/85	110/86	73/72	58/32	
Low		56/60	24/20	67/30	32/18	35/38	72/61	85/60	56/50	45/45		
Motor Output	kW	0.030×2		0.090×2		0.140×2		0.280×2		0.280×4		
Connection Duct Diameter	mm	φ 100			φ 150		φ 200		φ 250		φ 350	
Unit ambient condition	-15°C–50°CDB, 80%RH or less											

Note: 1. Sound level is measured at 1.5m below the centre of the body.  
 2. Airflow rate can be changed over to Low mode or High mode.  
 3. Sound level is measured in an anechoic chamber.  
 4. The sound level at the air discharge port is about 8 dB(A) higher than the unit's sound level.  
 5. The specifications, designs and information given here are subject to change without notice.  
 6. Temperature Exchange Efficiency is the mean value between cooling and heating.  
 7. Efficiency is measured under the following conditions:  
 Ratio of rated external static pressure has been maintained as follows; outdoor side to indoor side = 7 to 1.  
 8. In conformance with JIS standards (JIS B 8628), operating sound level is based on the value when one unit is operated, with the value converted for an anechoic chamber. This is transmission sound from the main unit, and does not include sound from the discharge grille. Thus it is normal for the sound to be louder than the indicated value when the unit is actually installed.  
 9. Sound level from the discharge port causes the value to be approximately 8 dB(A) (models with the airflow rate of less than 150 to 500m³/h) to approximately 11 dB(A) (models with the airflow rate of 650m³/h or more) greater than the indicated value. Furthermore, fan rotation and noise from the discharge grille

may increase depending on the on-site duct resistance conditions. Please consider noise countermeasures when installing the unit.  
 10. With large models in particular (1500 and 2000m³/h models), if the supply air (SA) grille is installed near the main unit, the noise of the main unit may be heard from the discharge grille via the duct, and this will result in a marked increase in noise. In such cases, if peripheral effects are included (such as reverberation of the floor and walls, combination with other equipment, and background noise), sound level may be as much as 15 dB(A) higher than the indicated value. When installing a large model, please provide as much separation as possible between the main unit and the discharge grille. If the equipment and discharge grille are near each other, please consider countermeasures such as the following:  
 • Use a sound-muffling box, flexible duct and sound-muffling air supply/discharge grilles  
 • Decentralised installation of discharge grilles  
 11. When installing in a location with particularly low background noise such as a classroom, please consider the following measures to avoid transmission sound from the main unit:  
 • Use of ceiling materials with high sound insulating properties (high transmission loss)  
 • Methods of blocking sound transmission, for example, by adding sound insulating materials around the bottom of the sound source.  
 Alternatively, consider supplementary methods such as installing the equipment in a different location (corridor, etc.)

### PM2.5 Filtration Unit

Models		BAF249A150	BAF249A300	BAF249A350	BAF249A500
Heat Reclaim Ventilator Models		VAM150GJVE	VAM250GJVE	VAM350GJVE	VAM500GJVE
Dimensions (H × W × D)		mm	220×603×366	220×603×366	300×623×366
Connection Duct Diameter		mm	φ 100	φ 150	φ 150
Airflow Rate		m³/h	150	250	350
PM2.5 Filter	Initial Pressure Drop	Pa	34	30	31
	Filter Lifetime <sup>1</sup>	1 year			
	Filtration Efficiency <sup>2</sup>	99% or higher			
	Filter Material No. <sup>3</sup>	BAF244A300		BAF244A500	


Note: 1. Annual usage: 400 hrs/month × 12 months = 4,800 hrs  
 2. 99% or higher removal rate of ultra-fine particles with diameters of 2.5 μm or more; 90% or higher removal rate of ultra-fine particles with diameters of 0.5 μm.  
 3. Filters come with applicable filtration units with a one-year life. They can be purchased and replaced according to their model numbers.

### PM2.5 with Activated Carbon Filtration Unit

Models		BAF249A150C	BAF249A300C	BAF249A350C	BAF249A500C
Heat Reclaim Ventilator Models		VAM150GJVE	VAM250GJVE	VAM350GJVE	VAM500GJVE
Dimensions (H × W × D)		mm	220×603×366	220×603×366	300×623×366
Connection Duct Diameter		mm	φ 100	φ 150	φ 150
Airflow Rate		m³/h	150	250	350
PM2.5 Filter	Initial Pressure Drop	Pa	34	30	31
	Filter Lifetime <sup>1</sup>	1 year			
	Filtration Efficiency <sup>2</sup>	99% or higher			
	Filter Material No. <sup>3</sup>	BAF244A300		BAF244A500	
Activated Carbon Filter	Initial Pressure Drop	Pa	3	5	5
	Filter Lifetime	1 year			
	Filter Material No. <sup>3</sup>	BAF244A300C		BAF244A500C	
Total Initial Pressure Drop for PM2.5 with Activated Carbon Filtration Unit		Pa	37	35	36

Note: 1. Annual usage: 400 hrs / month × 12 months = 4,800 hrs.  
 2. 99% or higher removal rate of ultra-fine particles with diameters of 2.5 μm or more; 90% or higher removal rate of ultra-fine particles with diameters of 0.5 μm.  
 3. Filters come with applicable filtration units with a one-year life. They can be purchased and replaced according to their model numbers.

## Options

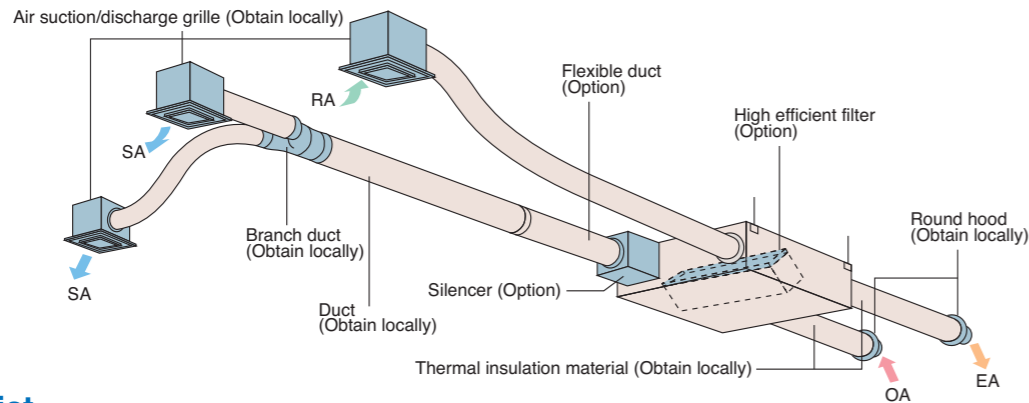

## Option List


Item	Type	VAM150 · 250 · 350 · 500 · 650 · 800 · 1000 · 1500 · 2000GJVE											
Controlling device	Heat Reclaim Ventilator remote controller	BRC301B61											
	Centralised controlling device	Residential central remote controller	DCS303A51 *1										
		Central remote controller	DCS302CA61										
		Unified ON/OFF controller	DCS301BA61										
		Schedule timer	DST301BA61										
PC Board Adaptor	Wiring adaptor for electrical appendices	KRP2A61											
	For humidifier	KRP50-2											
	Installation box for adaptor PCB	KRP50-2A90 (Mounted electric component assy of Heat Reclaim Ventilator)											
	For heater control kit	BRP4A50											
	For wiring (indoor unit of VRV)	Type	FXFQ-S	FXZQ-M	FXUQ-A	FXCQ-M	FXKQ-MA	FXDQ-PB	FXMQ-P	FXMQ-MA	FXHQ-MA	FXAQ-P	FXLQ-MA
		FXFQ-LU					FXDQ-NB				FXNQ-MA		
Installation box for adaptor PCB*		KRP1C63*	KRP1BA57*	KRP1C67	KRP1B61*	KRP1B61	KRP1B56*	KRP1C64*	KRP1B61	KRP1BA54	—	KRP1B61	
		Note 2, 3 KRP1H98A	Note 4, 6 KRP1BA101	—	Note 2, 3 KRP1B96	—	Note 4, 6 KRP1BA101	Note 2, 3 KRP4A96	—	Note 3 KRP1CA93	Note 2, 3 KRP4AA93	—	

- Note: 1. Installation box \* is necessary for each adaptor marked \*.  
 2. Up to 2 adaptors can be fixed for each installation box.  
 3. Only one installation box can be installed for each indoor unit.  
 4. Up to 2 installation boxes can be installed for each indoor unit.  
 5. Installation box \* is necessary for second adaptor.  
 6. Installation box \* is necessary for each adaptor.  
 7. \*1 For residential use only. When connected with a Heat Reclaim Ventilator (VAM), you can only switch the power ON/OFF. Cannot be used with other centralised control equipment.

Item	Type	VAM150GJVE	VAM250GJVE	VAM350GJVE	VAM500GJVE	VAM650GJVE	VAM800GJVE	VAM1000GJVE	VAM1500GJVE	VAM2000GJVE
Additional function	Silencer	—	—	—	KDDM24B50	—	KDDM24B100	—	KDDM24B100X2	—
	Nominal pipe diameter mm	—	—	—	φ 200	—	φ 250	—	φ 250	—
High efficiency filter		KAF242H25M	—	KAF242H50M	—	KAF242H65M	KAF242H80M	KAF242H100M	KAF242H80MX2	KAF242H100MX2
	Air filter for replacement	KAF241G25M	—	KAF241G50M	—	KAF241G65M	KAF241G80M	KAF241G100M	KAF241G80MX2	KAF241G100MX2
Flexible duct (1 m)		K-FDS101D	K-FDS151D	—	K-FDS201D	—	—	—	K-FDS251D	—
Flexible duct (2 m)		K-FDS102D	K-FDS152D	—	K-FDS202D	—	—	—	K-FDS252D	—
Duct adaptor		—	—	—	—	—	—	—	YDFA25A1	—
	Nominal pipe diameter mm	—	—	—	—	—	—	—	φ 250	—
CO <sub>2</sub> sensor		—	—	BRYMA65	—	BRYMA100	—	BRYMA65	BRYMA100	—

## PC board adaptor for heater control kit (BRP4A50)

When the installation of an electric heater is required in a cold region, this adaptor with an internal timer function eliminates the complicated timer connecting work that was necessary with conventional heaters.

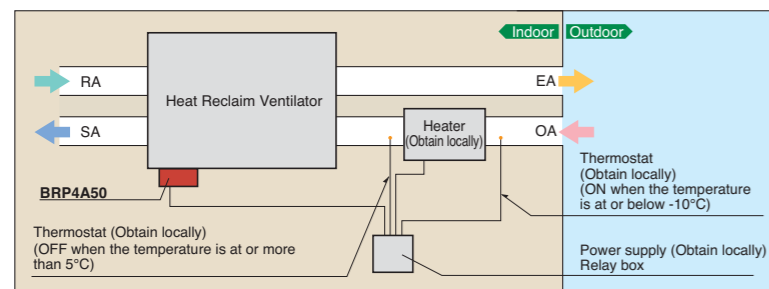

### Notes when installing

- Examine fully an installation place and specification for using the electric heater based on the standard and regulation of each country.
- Supply the electric heater and safety production devices such as a relay and a thermostat, etc of which qualities satisfy the standard and regulation of each country at site.
- Use a non-inflammable connecting duct to the electric heater. Be sure to allow 2 m or more between the electric heater and the Heat Reclaim Ventilator for safety.
- For the Heat Reclaim Ventilator, use a different power supply from that of the electric heater and install a circuit breaker for each.

